

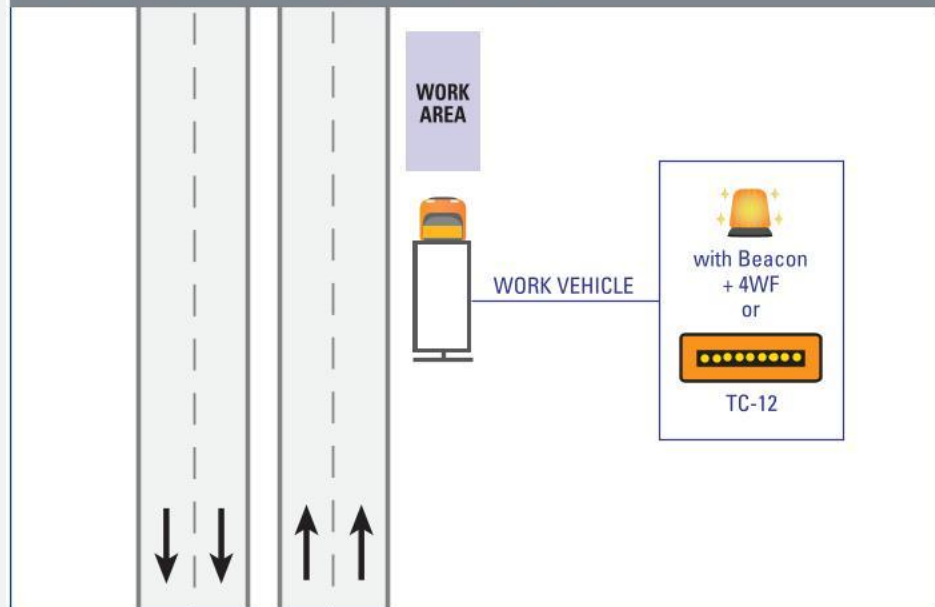
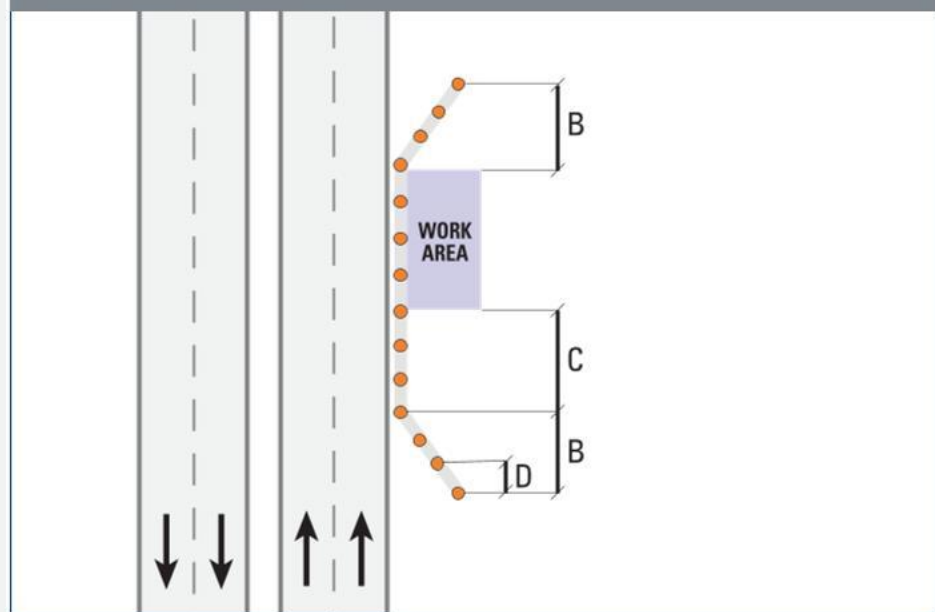
DS-4**Shoulder Work****Multi-Lane Divided****Mobile Operations****Intermittent****Very Short Duration****Short Duration****Long Duration****NOTES**

i) Mirror image for work on the left shoulder.

ii) Termination Taper optional.

iii) When a vehicle on shoulder with TC-12 enters a live lane, the TC-12 in bar mode must be switched to arrow mode.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

With Work Vehicle - Mobile, Intermittent, or VSD**Without Work Vehicle – VSD**

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
B	Shoulder Taper (m)	20	30	35	35	40
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	6	9	9	12
Minimum Number of Markers for Taper		4	5	5	7	8