

DS-6

Lane Encroachment

Multi-Lane Divided

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

NOTES


- i) Termination Taper optional.
- ii) Encroachment in the left lane: mirror image of right lane.
- iii) In addition to the minimum requirement of 3 m temporary lane width, an offset of 0.3 m to 0.6 m between Markers and the edge of the traveled lane is desirable.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

With Work Vehicle - Mobile, Intermittent, or VSD

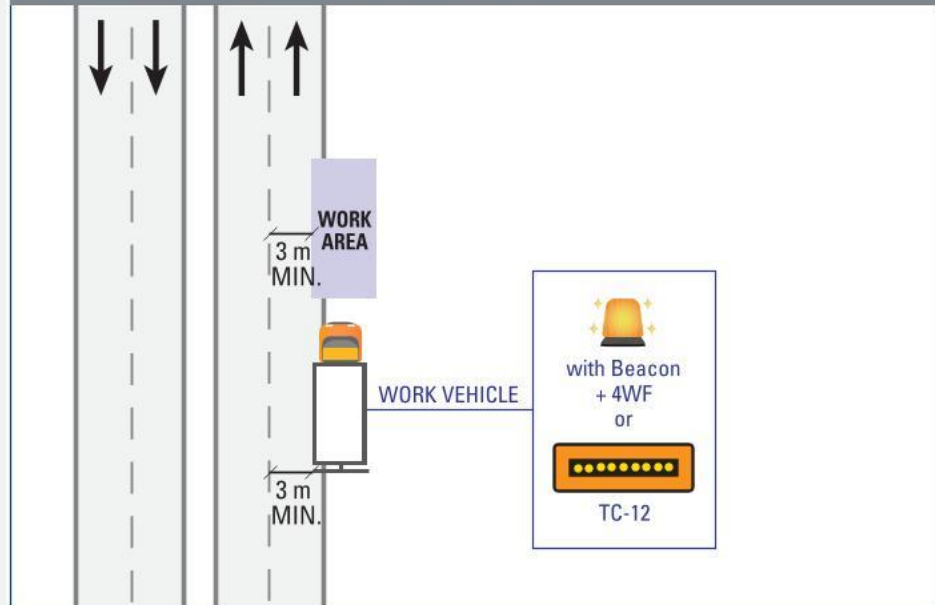

Without Work Vehicle – VSD

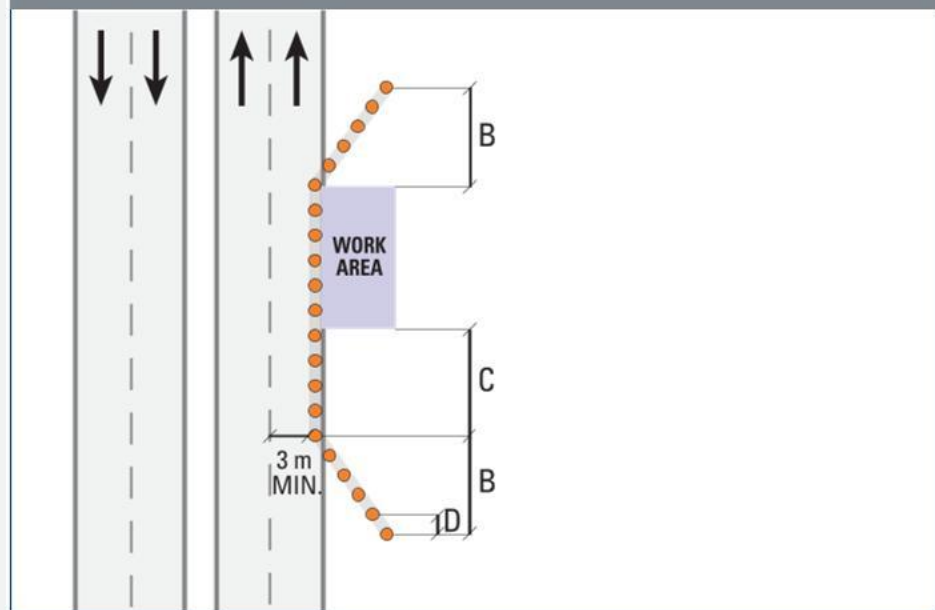

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
B	Shoulder Taper (m)	20	30	35	35	40
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	6	9	9	12
Minimum Number of Markers for Taper		4	5	5	7	8