

DS-7**Lane Encroachment****Multi-Lane Divided**

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration

NOTES


i) Encroachment in the left lane: mirror image of right lane.

ii) Work Area may or may not contain a Work Vehicle. See General Notes to Layouts #4.

iii) A Work Vehicle with a TC-12 may replace Markers for Short Duration work where NPRS is 60 km/h or lower.

iv) In addition to the minimum requirement of 3 m temporary lane width, an offset of 0.3 m to 0.6 m between Markers and the edge of the traveled lane is desirable.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

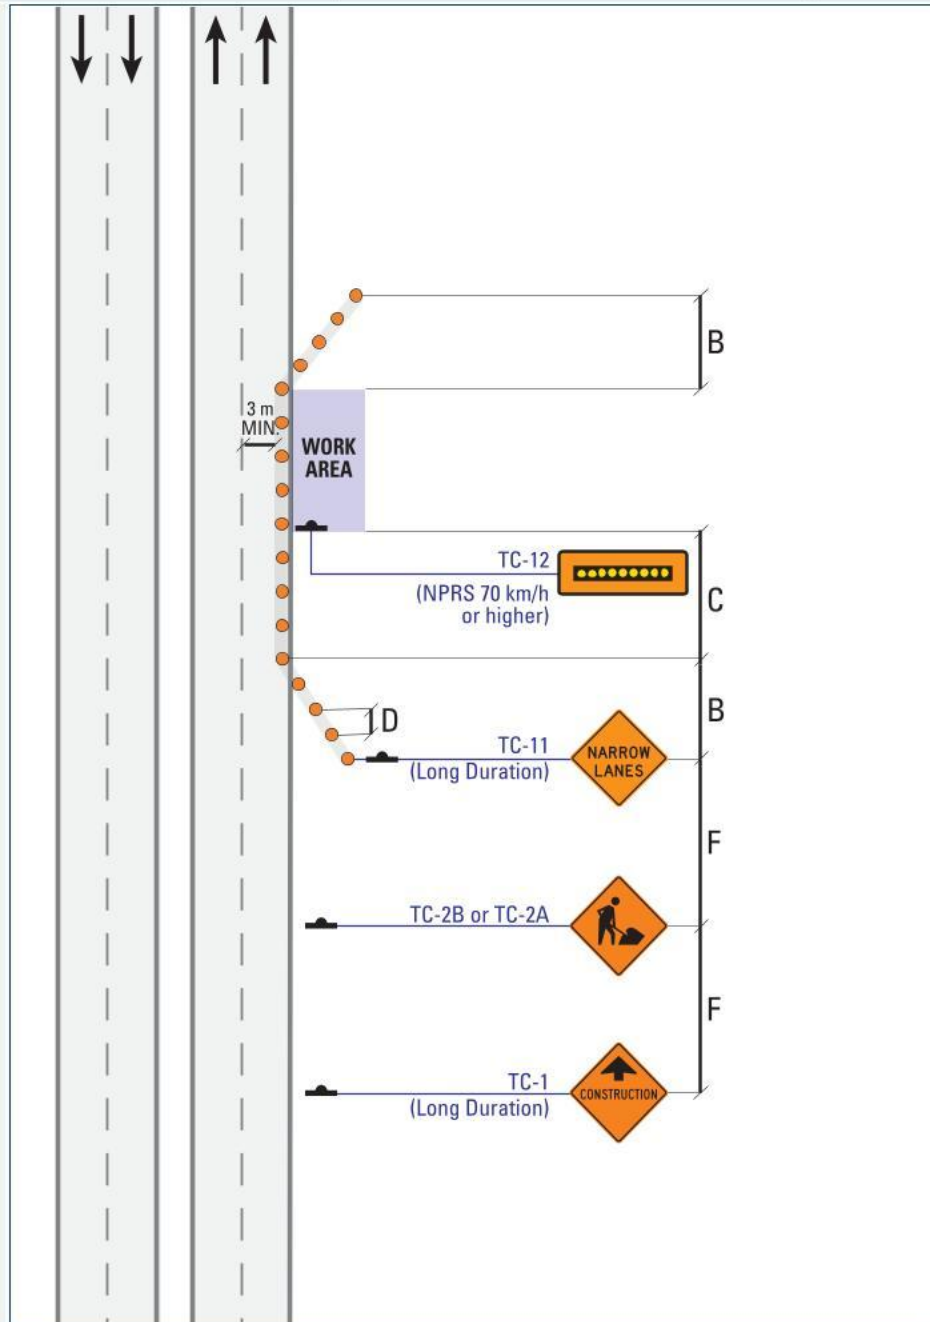

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
B	Shoulder Taper (m)	20	30	55	60	70
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150