

**DS-9****Parking Lane Closed****Multi-Lane Divided**

## Mobile Operations

## Intermittent

## Very Short Duration

## Short Duration


## Long Duration

**NOTES**

i) Placement of TC-1 or TC-2 may need to be adjusted if visibility is obstructed due to parked vehicles.

ii) For Short Duration work, a Work Vehicle with Beacon + 4WF or a TC-12 in bar mode can replace Markers.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

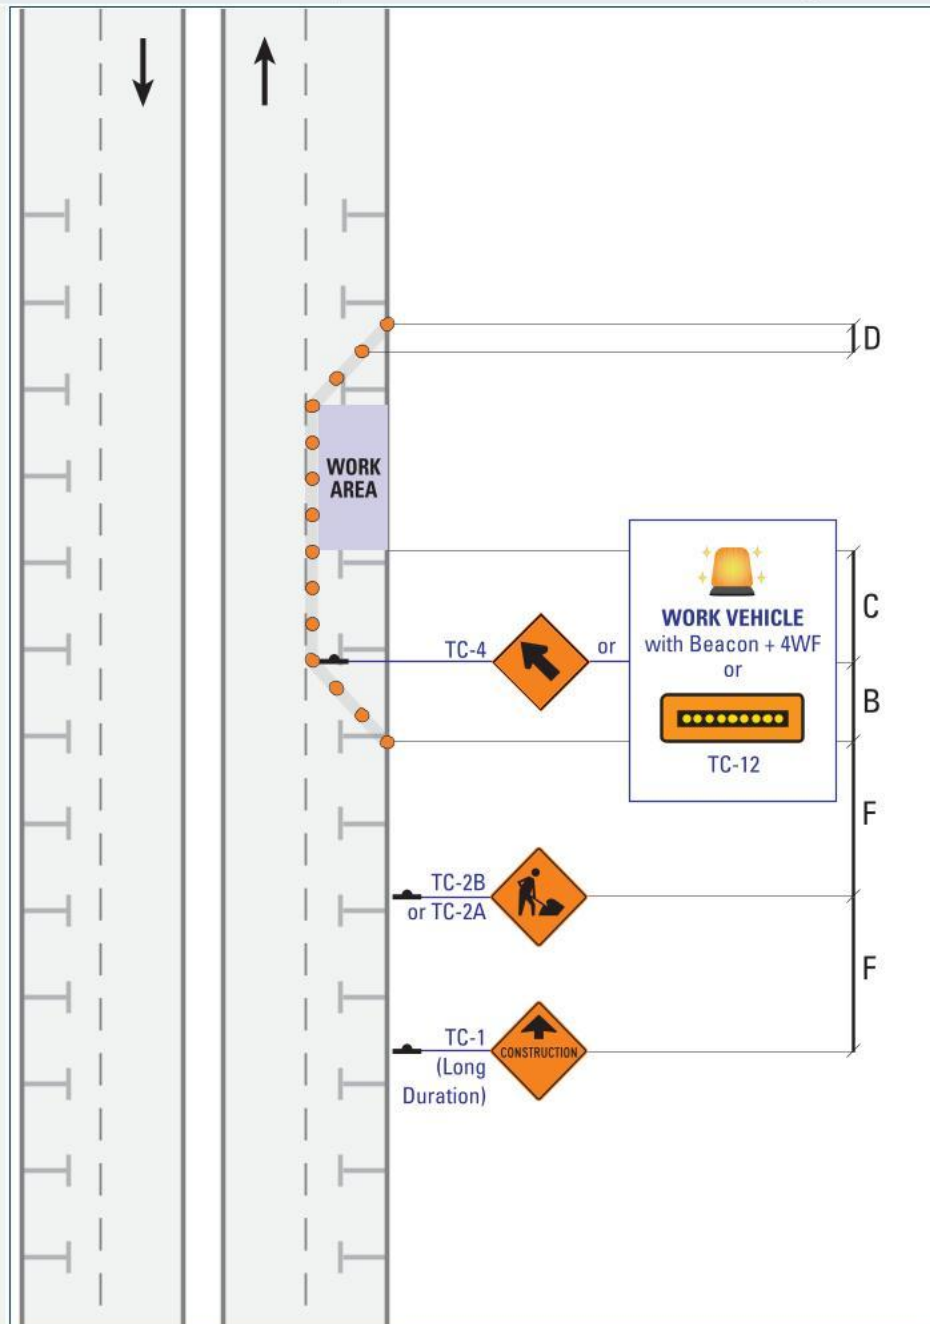

| Label    | Description                             | Normal Posted Regulatory Speed (km/h) |      |     |     |
|----------|-----------------------------------------|---------------------------------------|------|-----|-----|
|          |                                         | 50                                    | 60   | 70  | 80  |
| <b>B</b> | Shoulder Taper (m)                      | 20                                    | 30   | 55  | 60  |
| <b>C</b> | Longitudinal Buffer Area (LBA) (m)      | (30)                                  | (40) | 50  | 60  |
| <b>D</b> | Maximum Distance between Markers (m)    | 6                                     | 9    | 9   | 12  |
|          | Minimum Number of Markers for Taper     | 5                                     | 7    | 9   | 11  |
| <b>F</b> | Distance between Construction Signs (m) | 50                                    | 90   | 120 | 140 |