

## FR-1

## Lane Closed at Exit Ramp

## Freeway

## Mobile Operations

## Intermittent

## Very Short Duration

## Short Duration

## Long Duration


## NOTES

i) For Right Lane Closed, see FS-8.

ii) In the immediate area of the exit, Marker spacings of half of those shown on Table C should be used.

**For stationary Long Duration operations (longer than five days), Temporary Concrete Barriers must be used to separate the Work Area from traffic.**

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

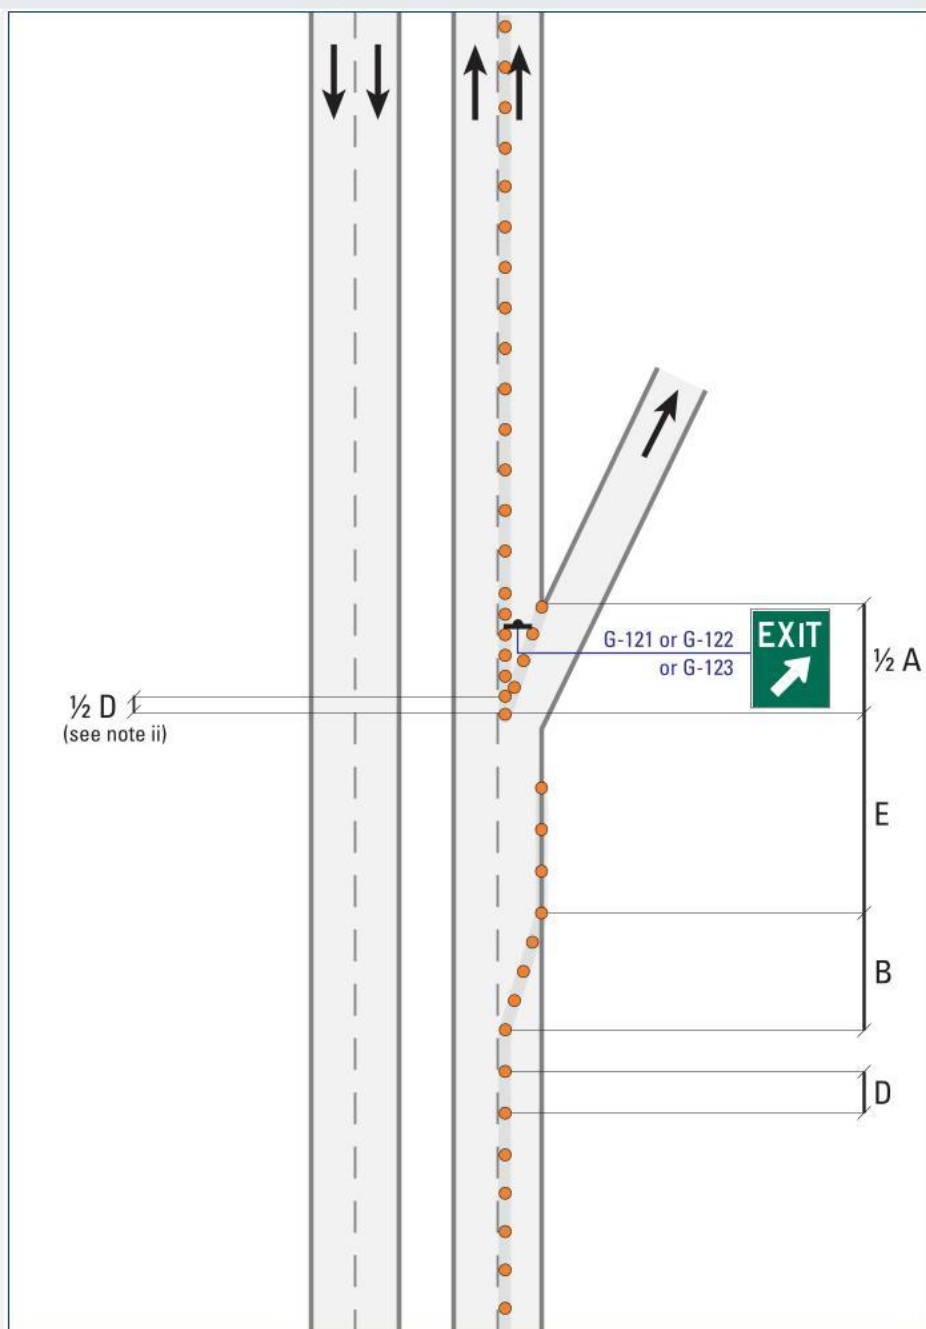

| Label    | Description                            | Normal Posted Regulatory Speed (km/h) |     |     |     |
|----------|----------------------------------------|---------------------------------------|-----|-----|-----|
|          |                                        | 80                                    | 90  | 100 | 110 |
| <b>A</b> | Taper Length for Full Lane Closure (m) | 220                                   | 250 | 300 | 300 |
| <b>B</b> | Shoulder Taper (m)                     | 75                                    | 85  | 100 | 100 |
| <b>D</b> | Maximum Distance between Markers (m)   | 12                                    | 24  | 24  | 24  |
| <b>E</b> | Minimum Tangent between Tapers (m)     | 220                                   | 250 | 300 | 300 |