

FR-2

Lane Closed at Exit Ramp with a Deceleration Lane

Freeway

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

NOTES

- i) For Right Lane Closed, see FS-8.
- ii) In the immediate area of the exit, Marker spacings of half of those shown on Table C should be used.

For stationary Long Duration operations (longer than five days), Temporary Concrete Barriers must be used to separate the Work Area from traffic.

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

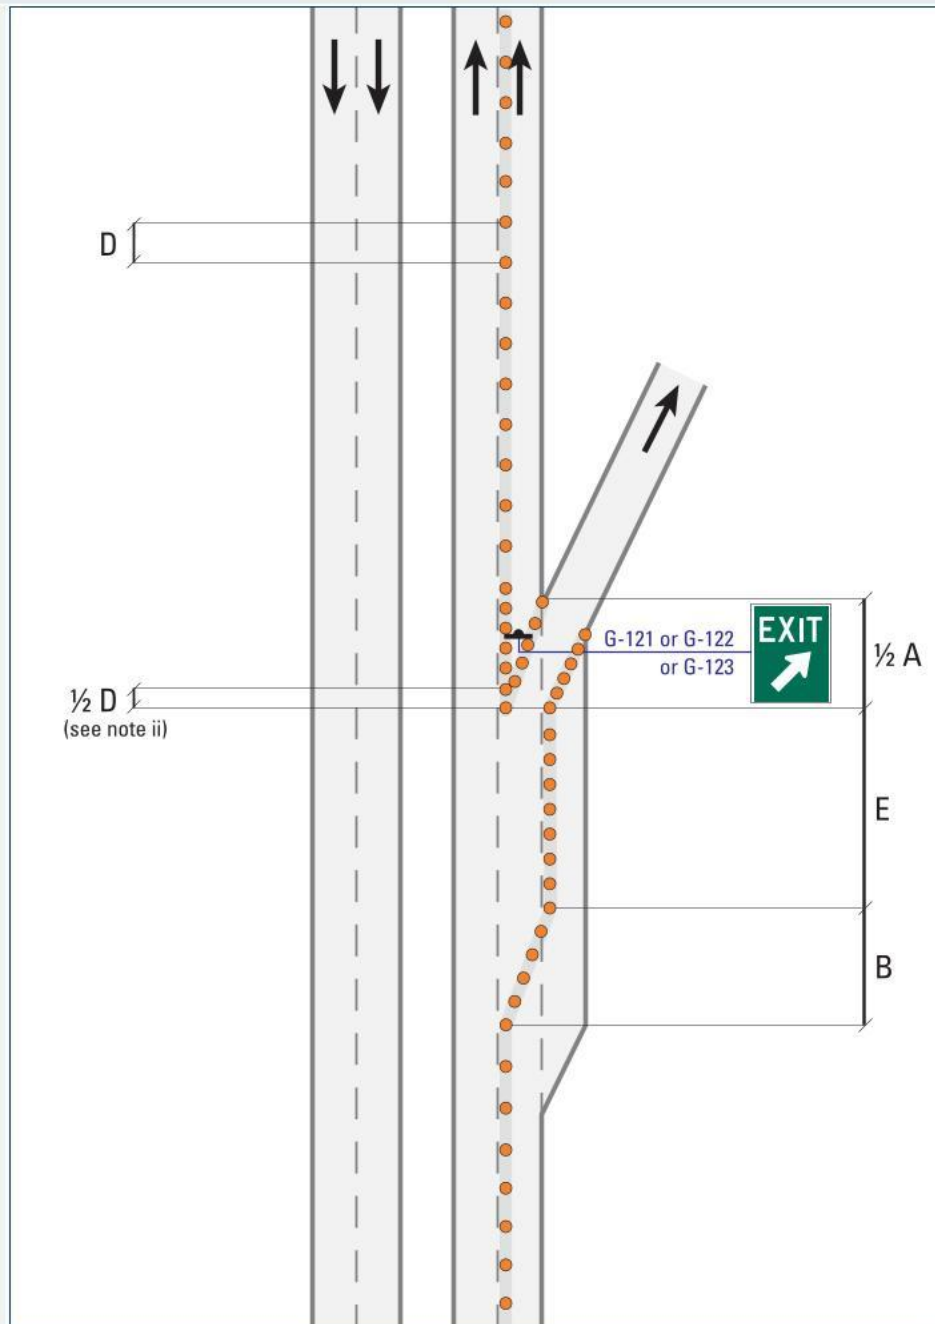

Label	Description	Normal Posted Regulatory Speed (km/h)			
		80	90	100	110
A	Taper Length for Full Lane Closure (m)	220	250	300	300
B	Shoulder Taper (m)	75	85	100	100
D	Maximum Distance between Markers (m)	12	24	24	24
E	Minimum Tangent between Tapers (m)	220	250	300	300