

FR-4

Lane Closed at Entrance Ramp with an Acceleration Lane

Freeway

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration


NOTES

- i) For Right Lane Closed, see FS-8.
- ii) Where space and work activities permit, the acceleration lane should be made as long as possible.
- iii) In the immediate area of the entrance, Marker spacings of half of those shown on Table C should be used.

For stationary Long Duration operations (longer than five days), Temporary Concrete Barriers must be used to separate the Work Area from traffic.

*The TC-4 sign must be installed at or just beyond the beginning of a lane closure taper.

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

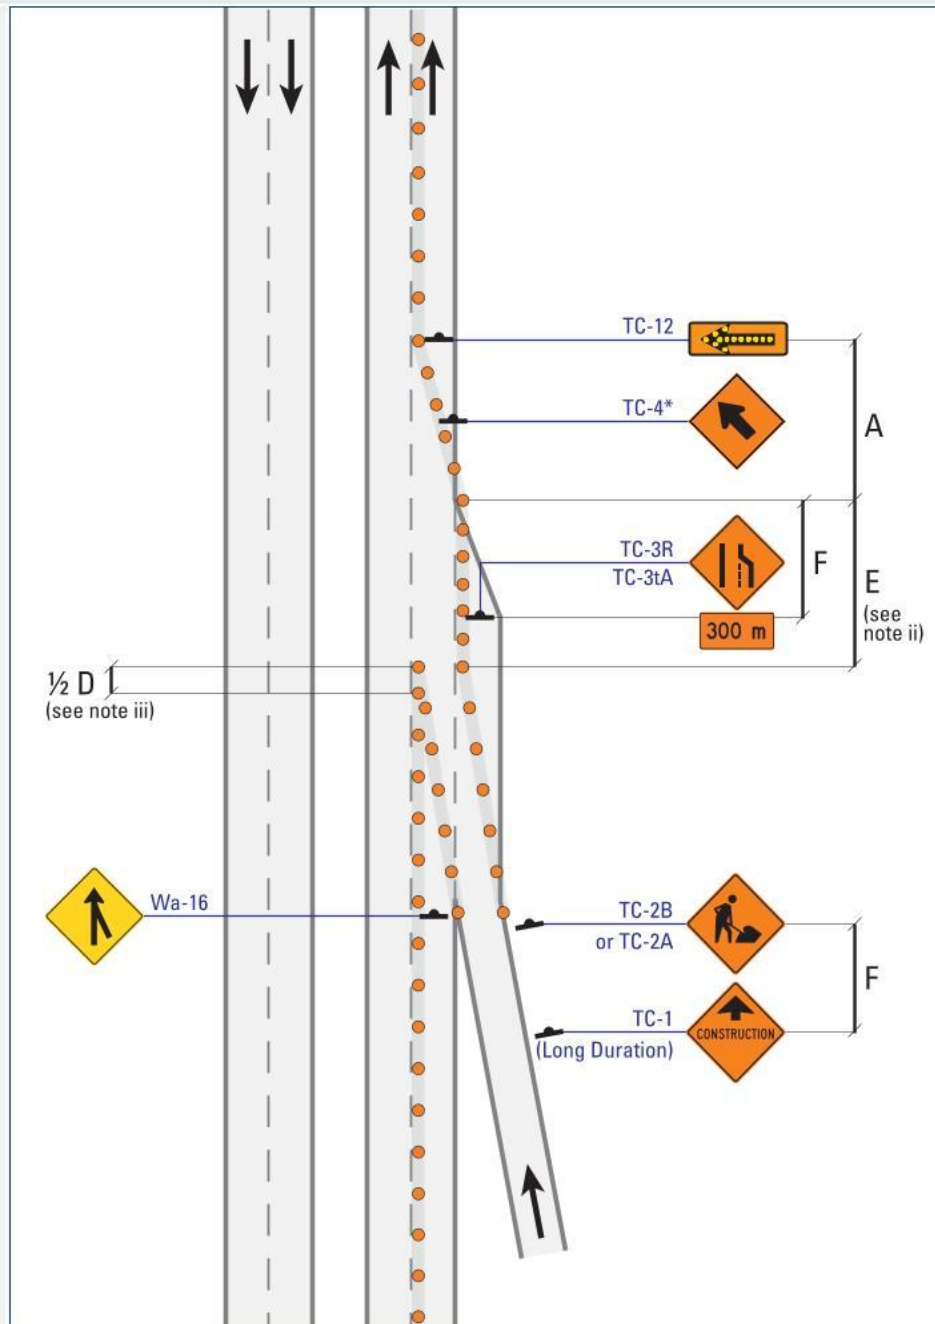

Label	Description	Normal Posted Regulatory Speed (km/h)			
		80	90	100	110
A	Taper Length for Full Lane Closure (m)	220	250	300	300
D	Maximum Distance between Markers (m)	12	24	24	24
E	Minimum Tangent between Tapers (m)	220	250	300	300
F	Distance between Construction Signs (m)	160	180	200	200