

FR-5

Ramp Closed

Freeway

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration


NOTES

i) Closed sign on Directional Guide Signs to be used for Long Duration only. For details, see OTM Book 8.

ii) See Section 4.3 of the Office Edition for location of TC-64.

For stationary Long Duration operations (longer than five days), Temporary Concrete Barriers must be used to separate the Work Area from traffic.

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

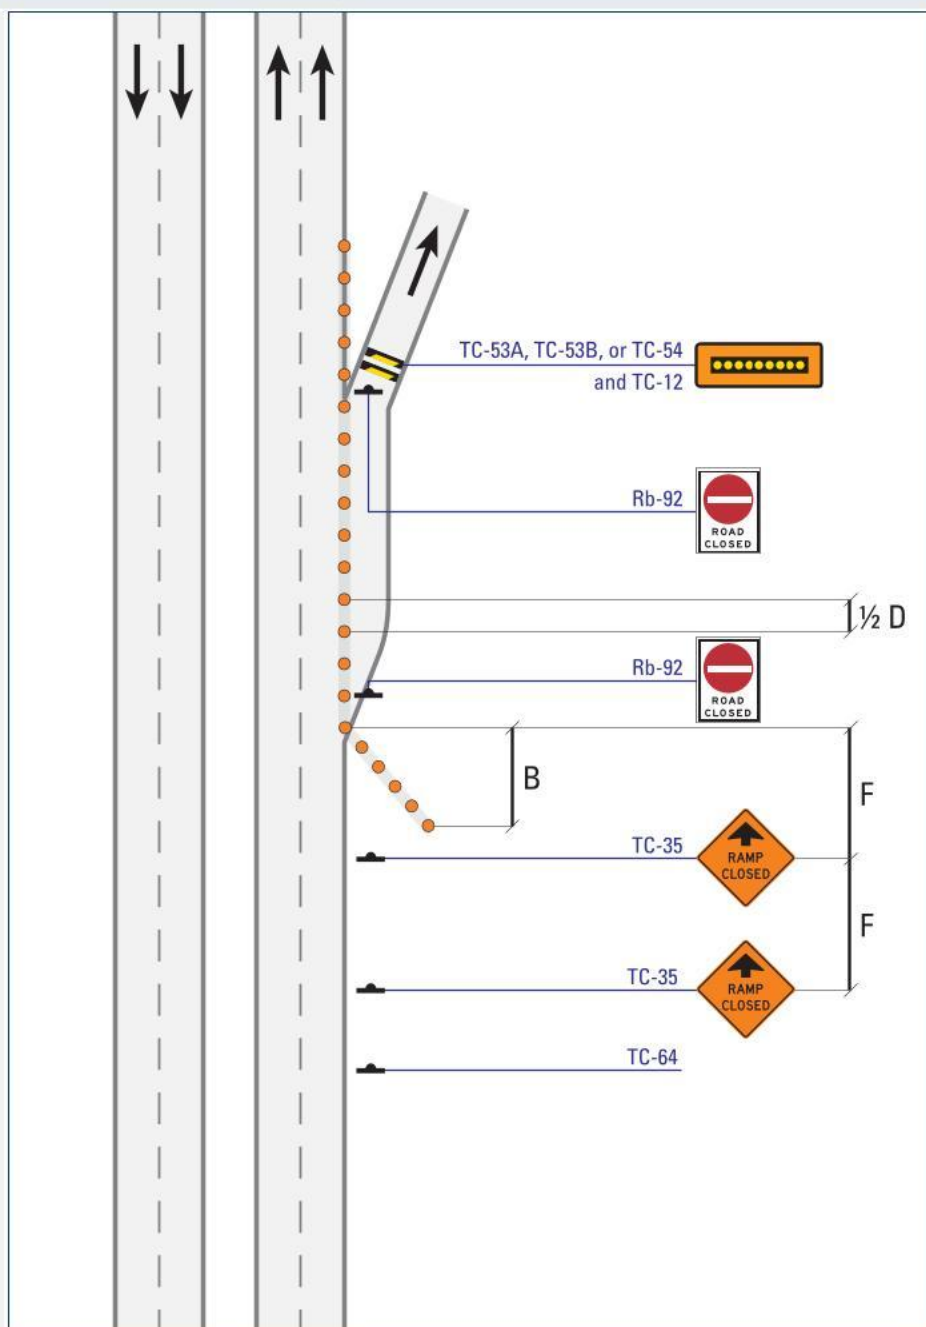

Label	Description	Normal Posted Regulatory Speed (km/h)			
		80	90	100	110
B	Shoulder Taper (m)	75	85	100	100
D	Maximum Distance between Markers (m)	12	24	24	24
F	Distance between Construction Signs (m)	160	180	200	200