

FR-6

Right Developed Lane Closed

Freeway

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

NOTES

i) Left Developed Lane Closed: mirror image of Right Developed Lane Closed.

For stationary Long Duration operations (longer than five days), Temporary Concrete Barriers must be used to separate the Work Area from traffic.

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

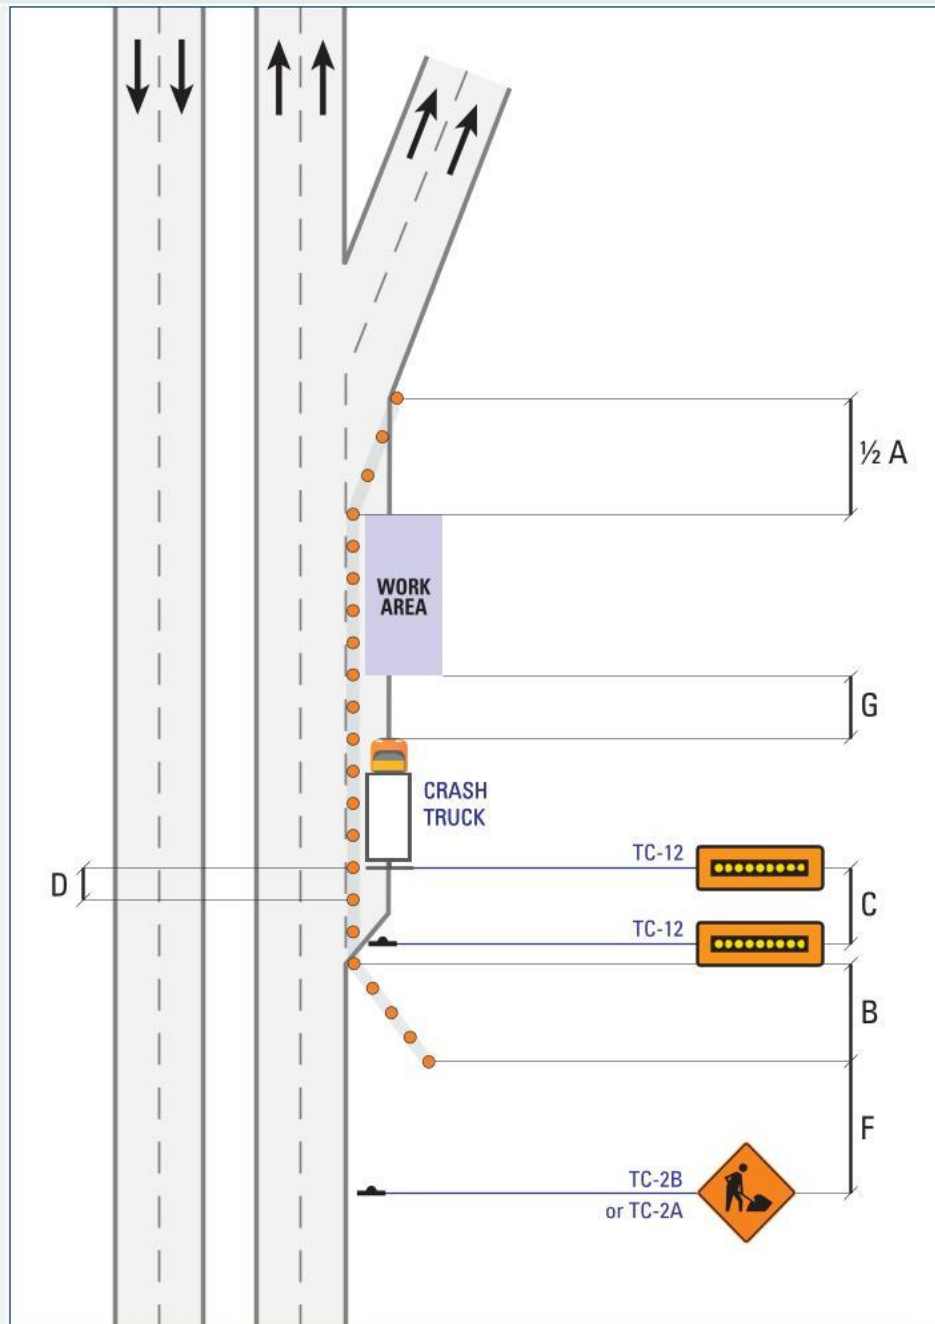

Label	Description	Normal Posted Regulatory Speed (km/h)			
		80	90	100	110
A	Taper Length for Full Lane Closure (m)	220	250	300	300
B	Shoulder Taper (m)	75	85	100	100
C	Longitudinal Buffer Area (LBA) (m)	60	75	95	110
D	Maximum Distance between Markers (m)	12	24	24	24
F	Distance between Construction Signs (m)	160	180	200	200
G	Stationary Work (Lateral Intrusion Deterrence Gap (LIDG) (m)	60	65	70	75