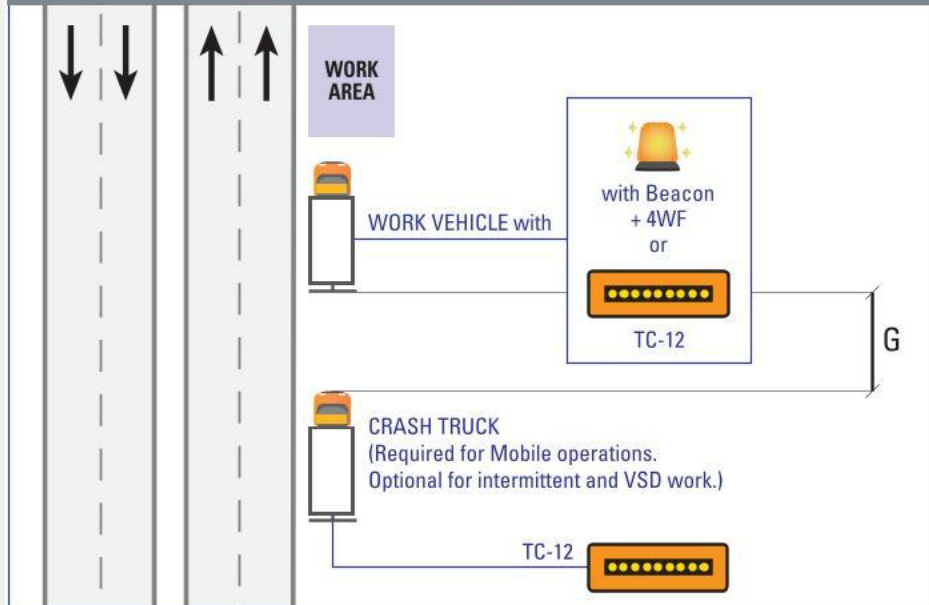
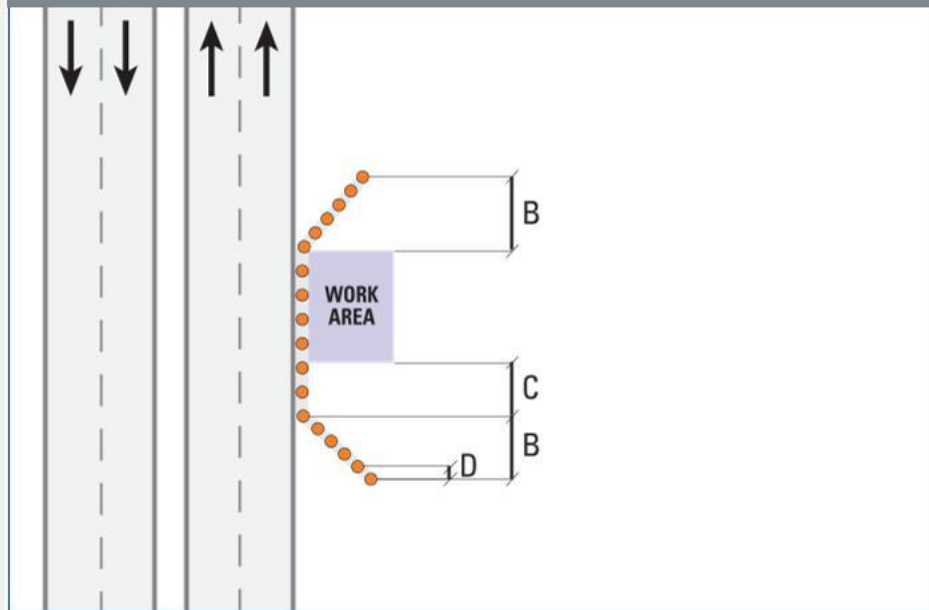


FS-1**Shoulder Work****Freeway****Mobile Operations****Intermittent****Very Short Duration****Short Duration****Long Duration****NOTES**

- i) Work on the left shoulder mirror image.
- ii) Termination Taper optional.
- iii) Preferred option for VSD work is to have a Work Vehicle present.
- iv) When a vehicle on shoulder with TC-12 enters a live lane, the TC-12 in bar mode must be switched to arrow mode.

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

With Work Vehicle – Mobile, Intermittent, or VSD**Without Work Vehicle – VSD**

Label	Description	Normal Posted Regulatory Speed (km/h)			
		80	90	100	110
B	Shoulder Taper (m)	75	85	100	100
C	Longitudinal Buffer Area (LBA) (m)	60	75	95	110
D	Maximum Distance between Markers (m)	12	24	24	24
G	Mobile Work: Lateral Intrusion Deterrence Gap (LIDG) (m)	45	50	55	60
G	Stationary Work (Lateral Intrusion Deterrence Gap (LIDG) (m)	60	65	70	75