

FS-3

Partial Lane Shift: Narrow Lanes

Freeway

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration


NOTES

i) Minimum lane width is 3.5 m.
Additionally, an offset of 0.3 m to 0.6 m between Markers and the edge of the travelled lane is desirable.

ii) For narrowed lanes exceeding 1 km, use a TC-16EL (ER) in place of the TC-9L (R). Add an additional TC16ER (EL) at the beginning of end Taper.

For stationary Long Duration operations (longer than five days), Temporary Concrete Barriers must be used to separate the Work Area from traffic.

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

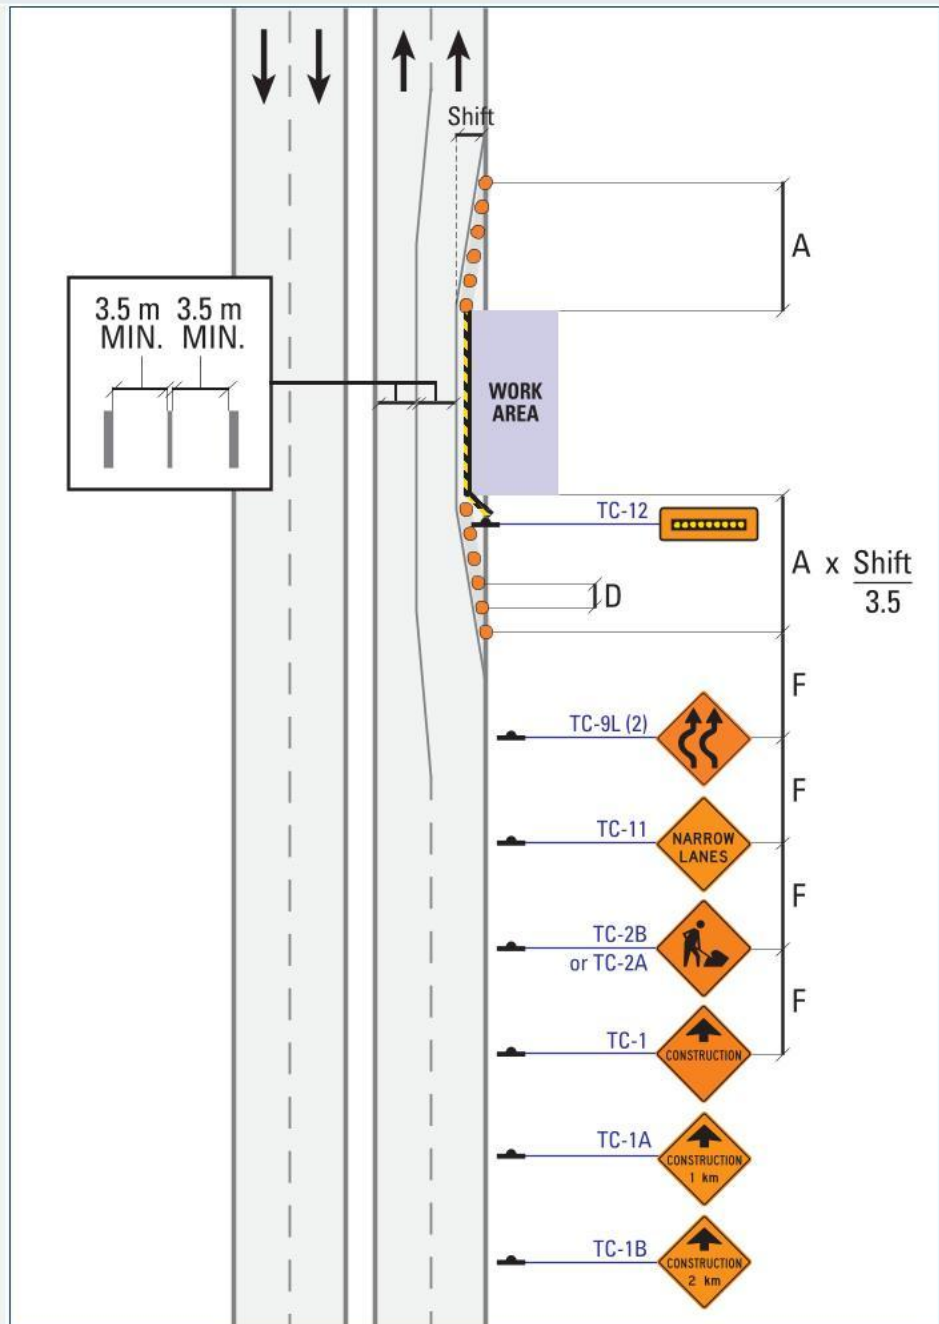

Normal Posted Regulatory Speed (km/h)

Label	Description	80	90	100	110
A	Taper Length for Full Lane Closure (m)	220	250	300	300
D	Maximum Distance between Markers (m)	12	24	24	24
F	Distance between Construction Signs (m)	160	180	200	200