

## FS-4

## Lane Realignment

## Freeway

## Mobile Operations

## Intermittent

## Very Short Duration

## Short Duration


## Long Duration

## NOTES

- i) Refer to OTM Book 6 for the appropriate placement of TC-18L.
- ii) Markers used for additional Delineation through Tangent on the far-side of the Work Area are optional.
- iii) If Temporary Concrete Barriers are used, the Crash Truck is not required.
- iv) TC-1A and TC-1B Advance Warning are required for freeways (not shown).
- v) Work on the right shoulder: mirror image.

**For stationary Long Duration operations (longer than five days), Temporary Concrete Barriers must be used to separate the Work Area from traffic.**

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

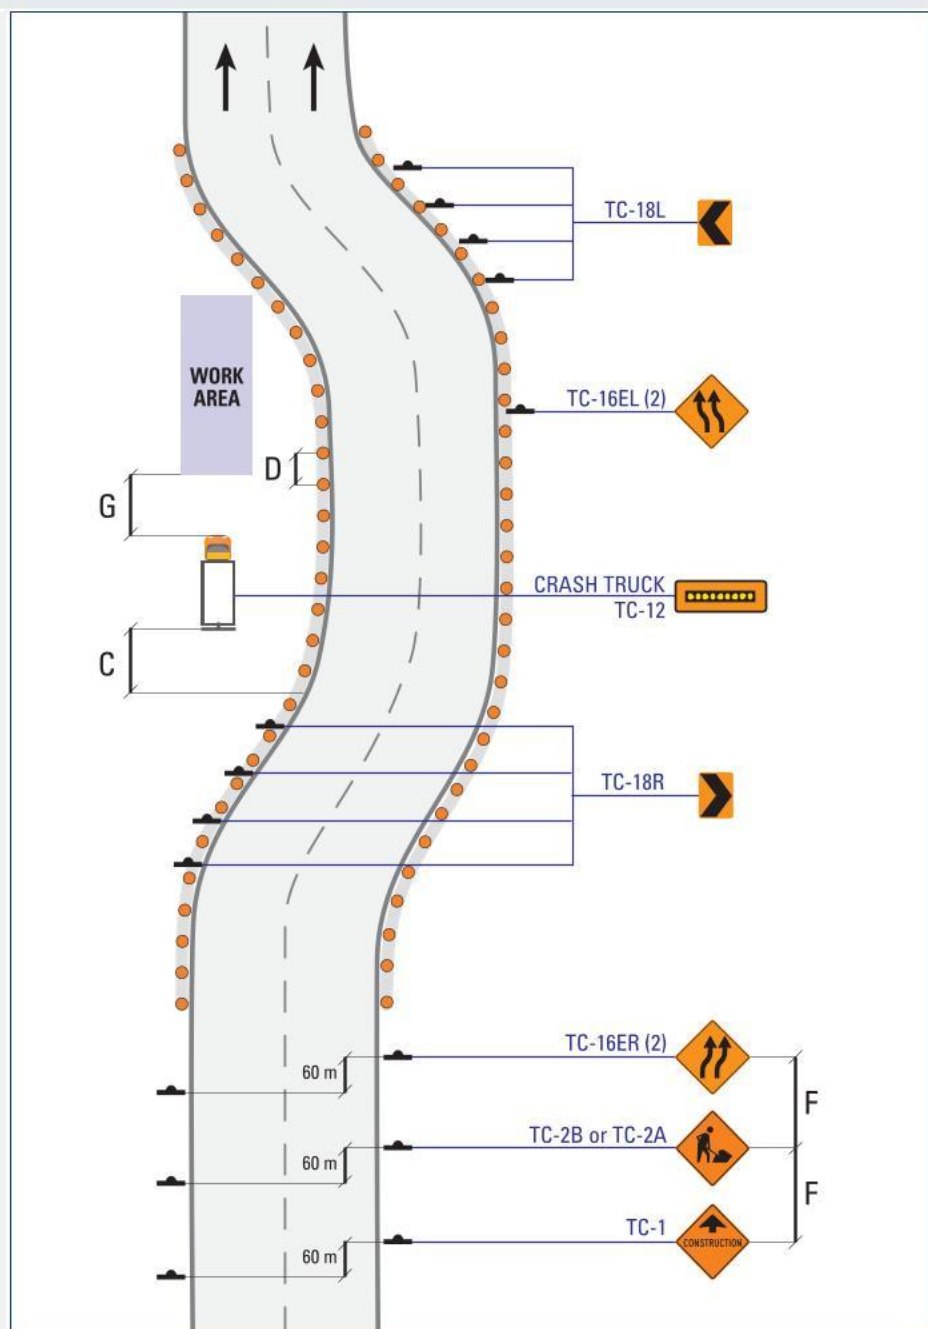

| Label    | Description                                                  | Normal Posted Regulatory Speed (km/h) |     |     |     |
|----------|--------------------------------------------------------------|---------------------------------------|-----|-----|-----|
|          |                                                              | 80                                    | 90  | 100 | 110 |
| <b>C</b> | Longitudinal Buffer Area (LBA) (m)                           | 60                                    | 75  | 95  | 110 |
| <b>D</b> | Maximum Distance between Markers (m)                         | 12                                    | 24  | 24  | 24  |
| <b>F</b> | Distance between Construction Signs (m)                      | 160                                   | 180 | 200 | 200 |
| <b>G</b> | Stationary Work (Lateral Intrusion Deterrence Gap (LIDG) (m) | 60                                    | 65  | 70  | 75  |