

FS-6

Right or Left Lane Closed or Occupied

Freeway

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration


NOTES

i) Distance between Sign Truck and Crash Truck may be adjusted to accommodate hills, curves, restricted visibility, or other site specific conditions.

ii) Left Lane Closed: mirror image of Right Lane Closed, where shoulder exists. Where no shoulder or narrow shoulder exists, Sign Truck may be eliminated. Optionally, modify by replacing the Sign Truck with a Crash Truck with a TC-12 in arrow mode moving behind, in the same lane as the first Crash Truck in bar mode.

iii) When a vehicle on shoulder with TC-12 enters a live lane, the TC-12 in bar mode must be switched to arrow mode.

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

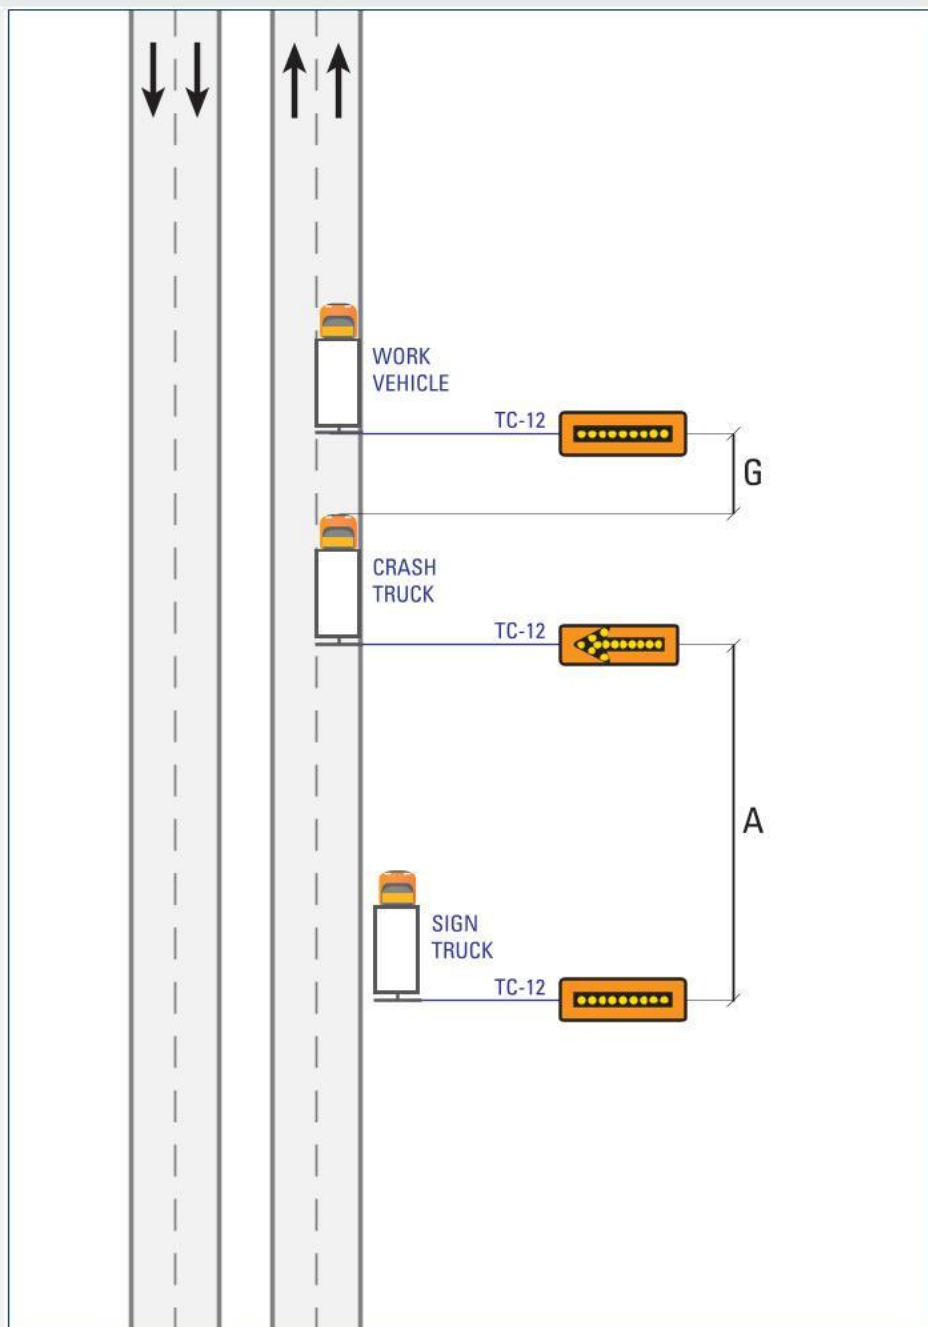

Label	Description	Normal Posted Regulatory Speed (km/h)			
		80	90	100	110
A	Taper Length for Full Lane Closure (m)	220	250	300	300
G	Stationary Work (Lateral Intrusion Deterrence Gap (LIDG) (m)	45	50	55	60