

FS-7**Right or Left Lane Closed****Freeway**

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration


NOTES

i) The Work Area may include Work Vehicles. All Work Vehicles in the Work Area (downstream of the Crash Truck) with an activated TC-12 must have the TC-12 in bar mode.

ii) Left Lane Closed: mirror image of Right Lane Closed.

iii) For HOV Lane Closure (or other legally limited lane use): lengthen C such that the transition Taper is within the legal access/egress zone, and lengthen Work Area such that exit Taper is within legal access/egress zone. Where not practicable, notify and/or have police present.

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

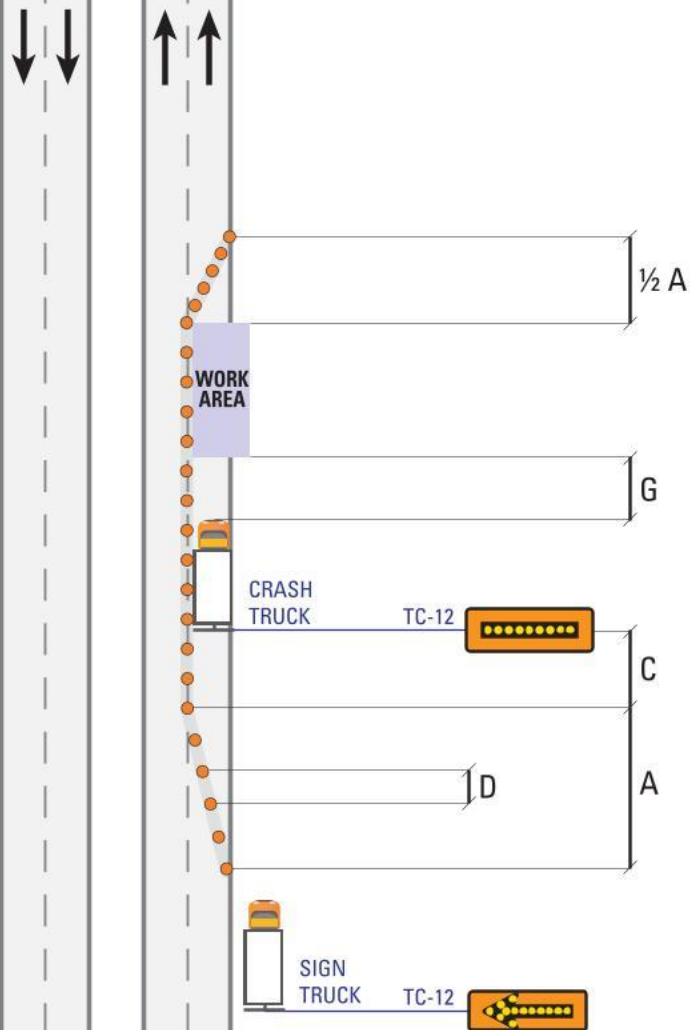

Label	Description	Normal Posted Regulatory Speed (km/h)			
		80	90	100	110
A	Taper Length for Full Lane Closure (m)	220	250	300	300
C	Longitudinal Buffer Area (LBA) (m)	60	75	95	110
D	Maximum Distance between Markers (m)	12	24	24	24
G	Stationary Work (Lateral Intrusion Deterrence Gap (LIDG) (m)	60	65	70	75