

FS-8

Right or Left Lane Closed

Freeway

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration


NOTES

- i) Left Lane Closed: mirror image of Right Lane Closed.
- ii) Where signs cannot be accommodated in the median, provide additional signs on the right shoulder.
- iii) The Work Area may include Work Vehicles. All Work Vehicles in the Work Area (downstream of the Crash Truck) with an activated TC-12 must have the TC-12 in bar mode.
- iv) For HOV Lane Closure (or other legally limited lane use): lengthen C such that the transition Taper is within the legal access/egress zone, and lengthen Work Area such that exit Taper is within legal access/egress zone. Where not practicable, notify and/or have police present.

For stationary Long Duration operations (longer than five days), Temporary Concrete Barriers must be used to separate the Work Area from traffic.

*The TC-4 sign must be installed at or just beyond the beginning of a lane closure taper.

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

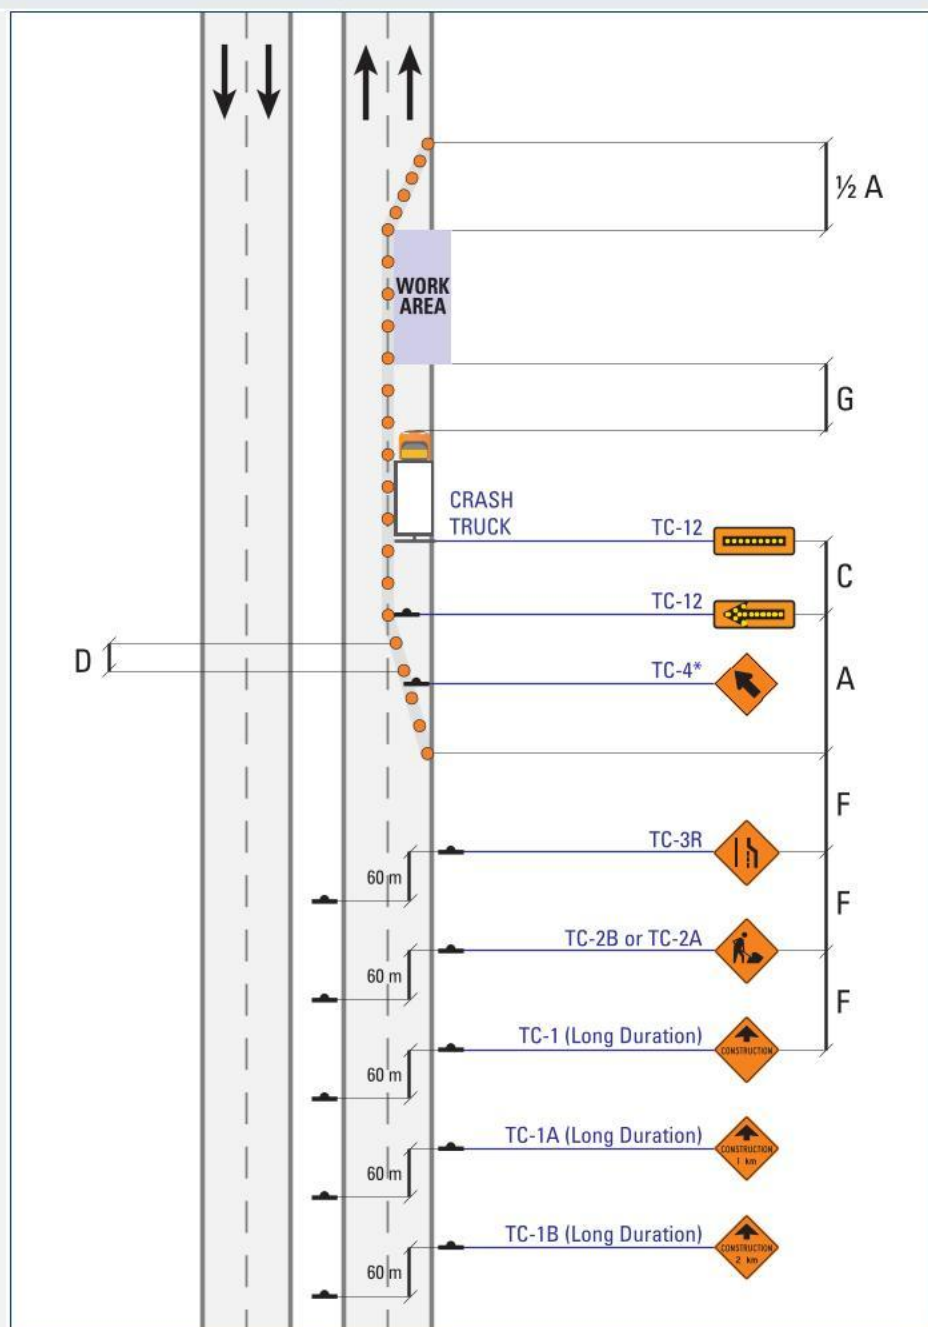

Label	Description	Normal Posted Regulatory Speed (km/h)			
		80	90	100	110
A	Taper Length for Full Lane Closure (m)	220	250	300	300
C	Longitudinal Buffer Area (LBA) (m)	60	75	95	110
D	Maximum Distance between Markers (m)	12	24	24	24
F	Distance between Construction Signs (m)	160	180	200	200
G	Stationary Work (Lateral Intrusion Deterrence Gap (LIDG) (m)	60	65	70	75