

FS-9

Six Lane Road: Centre Lane or Two Lanes Closed

Freeway

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration

NOTES


i) Where signs cannot be accommodated in the median, provide additional signs on the right shoulder.

ii) Left Lane Closed: mirror image of Right Lane Closed.

For stationary Long Duration operations (longer than five days), Temporary Concrete Barriers must be used to separate the Work Area from traffic.

*The TC-4 sign must be installed at or just beyond the beginning of a lane closure taper.

For further detail on Work Zone components, see [Table C \(Freeways, pg. 242\)](#).

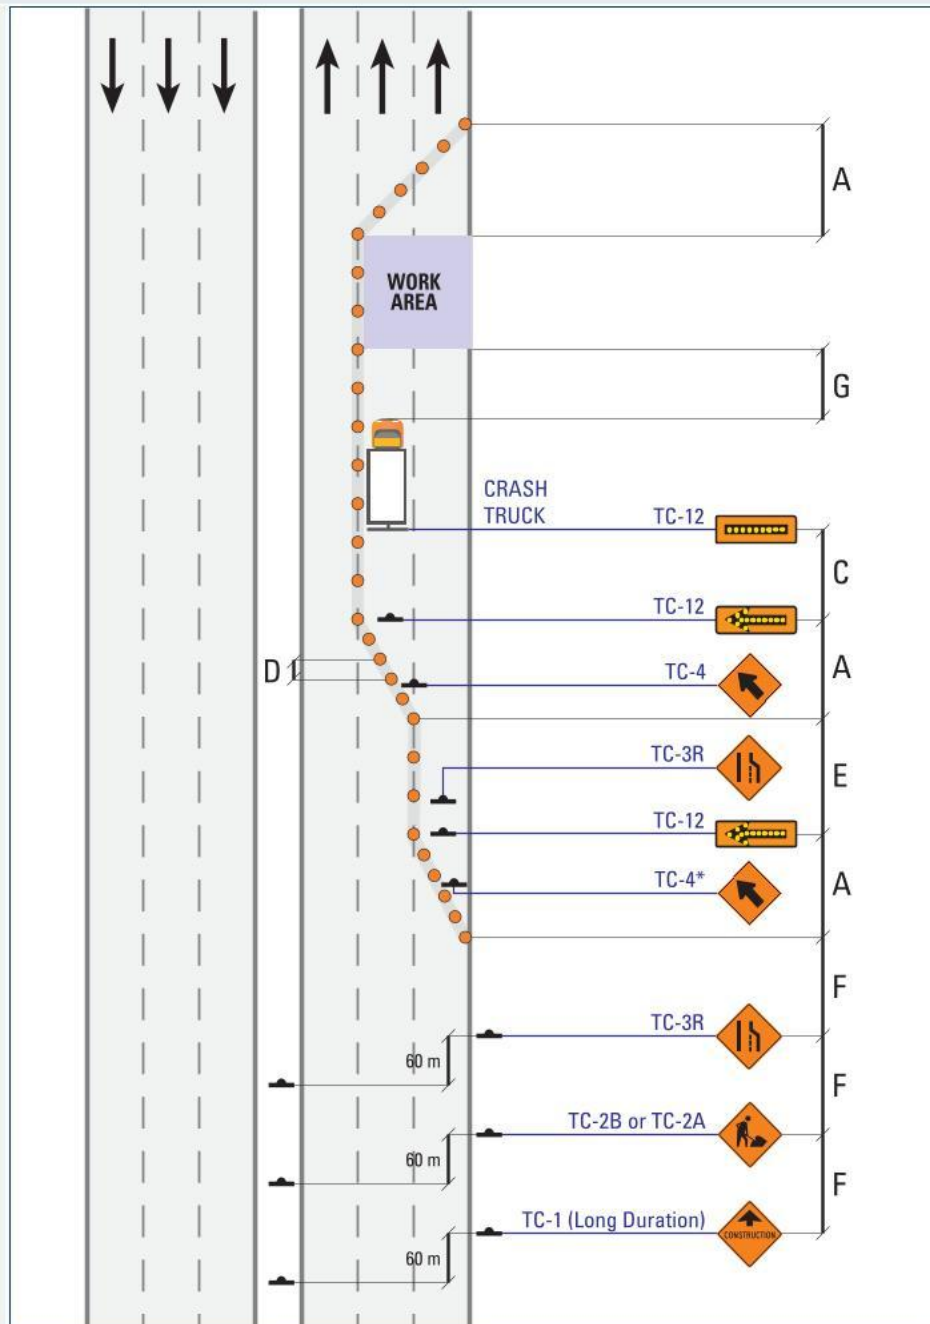

Normal Posted Regulatory Speed (km/h)

Label	Description	80	90	100	110
A	Taper Length for Full Lane Closure (m)	220	250	300	300
C	Longitudinal Buffer Area (LBA) (m)	60	75	95	110
D	Maximum Distance between Markers (m)	12	24	24	24
E	Minimum Tangent between Tapers (m)	220	250	300	300
F	Distance between Construction Signs (m)	160	180	200	200
G	Stationary Work (Lateral Intrusion Deterrence Gap (LIDG) (m)	60	65	70	75