

TI-12**Work in Intersection: (TCP)****Two-Lane, Two-Way**

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

i) When Traffic Volumes are High or when the intersection is signalized, consult the Road Authority to determine whether police assistance is required. Care should be taken by the TCP to coordinate with any intersection control such as traffic signals or STOP signs.

For further detail on Work Zone components see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#), and [TCP Table \(pg. 175\)](#).

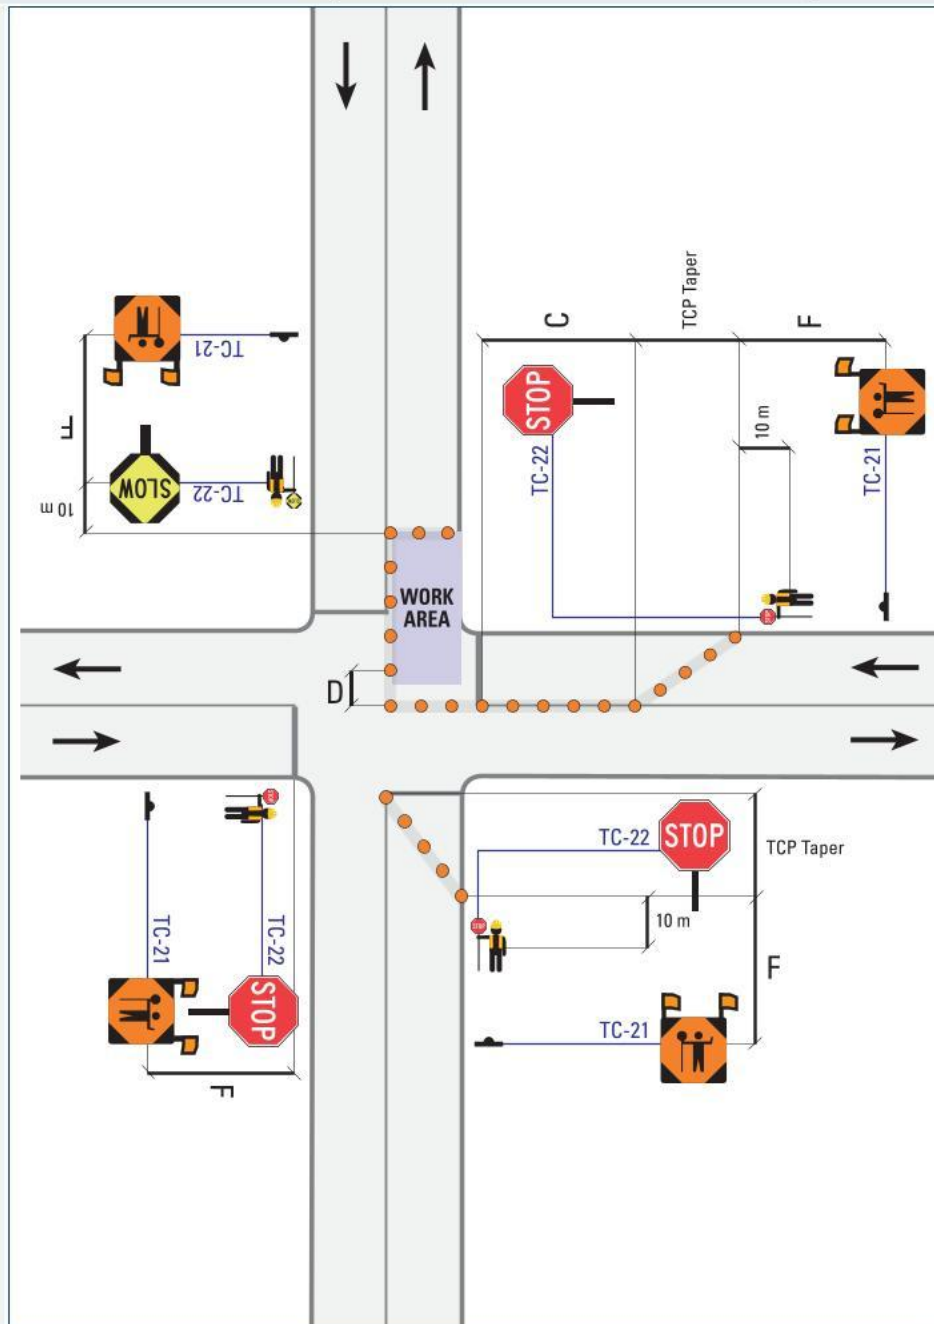

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
TCP	Taper Length for TCP Presence (m)	15	20	25	30	30
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	6	9	9	12
	Minimum Number of Markers for Taper	4	5	5	7	8
F	Distance between Construction Signs (m)	30	30	60	60	80