

TI-15**Work in Intersection: Near-Side Lane Closed (Detour)****Two-Lane, Two-Way**

Mobile Operations

Intermittent

Very Short Duration

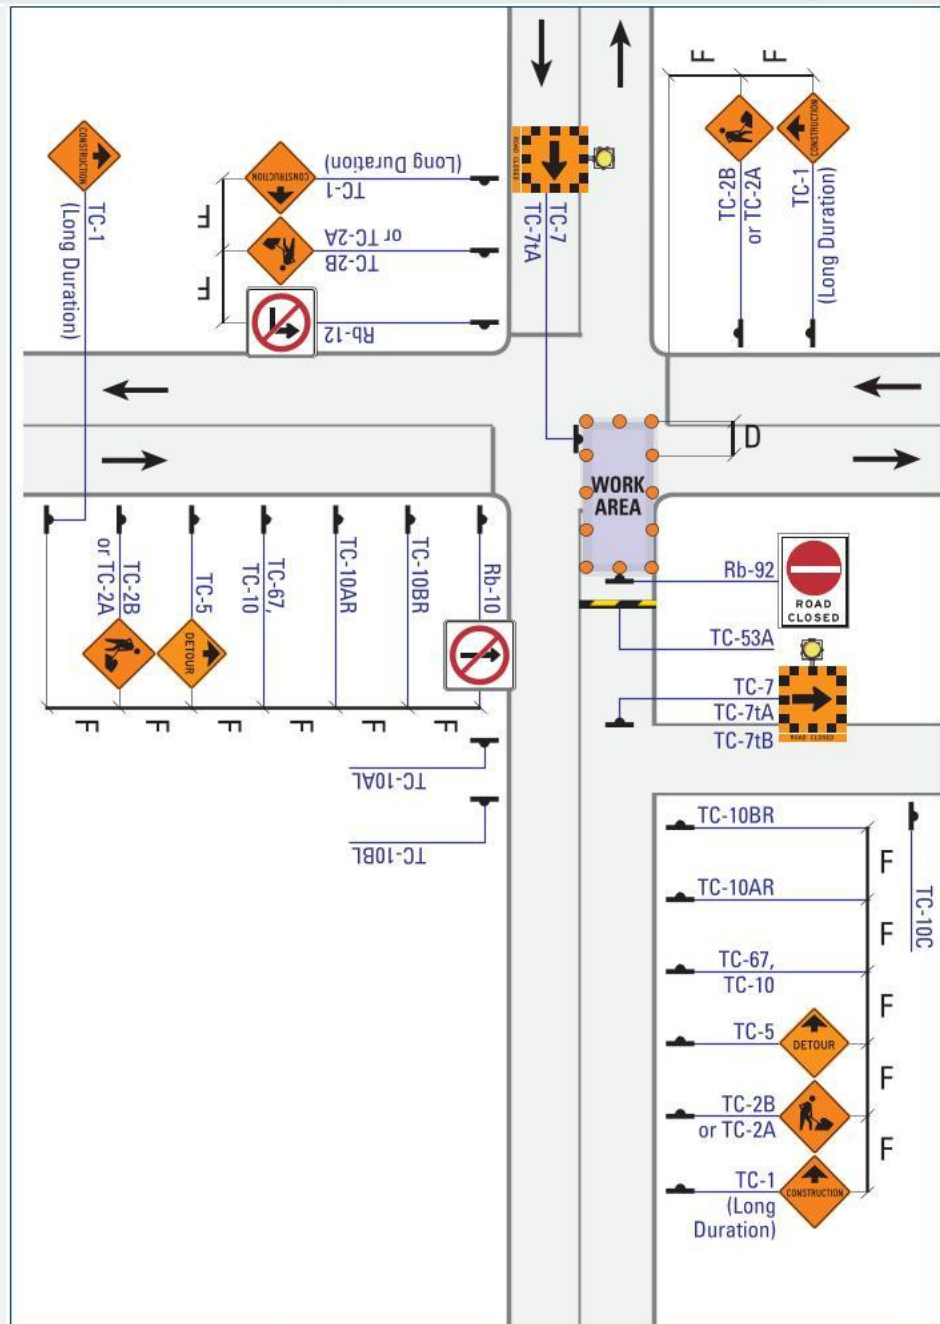
Short Duration

Long Duration

NOTES

- i) If space permits, use TC-53A or TC-53B to surround the Work Area, otherwise reduce space between TC-54.
- ii) This layout is to be used if an alternate Route Detour is available; if not, TCP are required and the layout shown in TI-11 should be used.
- iii) See TS-21 and TS-22 for Detour signs and layout.
- iv) Flashing Amber Light above TC-7 must not be used at intersections with active signals.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

**Normal Posted Regulatory Speed (km/h)**

Label	Description	50	60	70	80	90
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150