

TI-18

Cyclist: Detour

Two-Lane, Two-Way

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

Shared lane only to be used if considered by OTM Book 18 or MTO Bikeways Design Manual, Desirable Cycling Facility Nomograph. Otherwise, cycling Detour should be provided.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

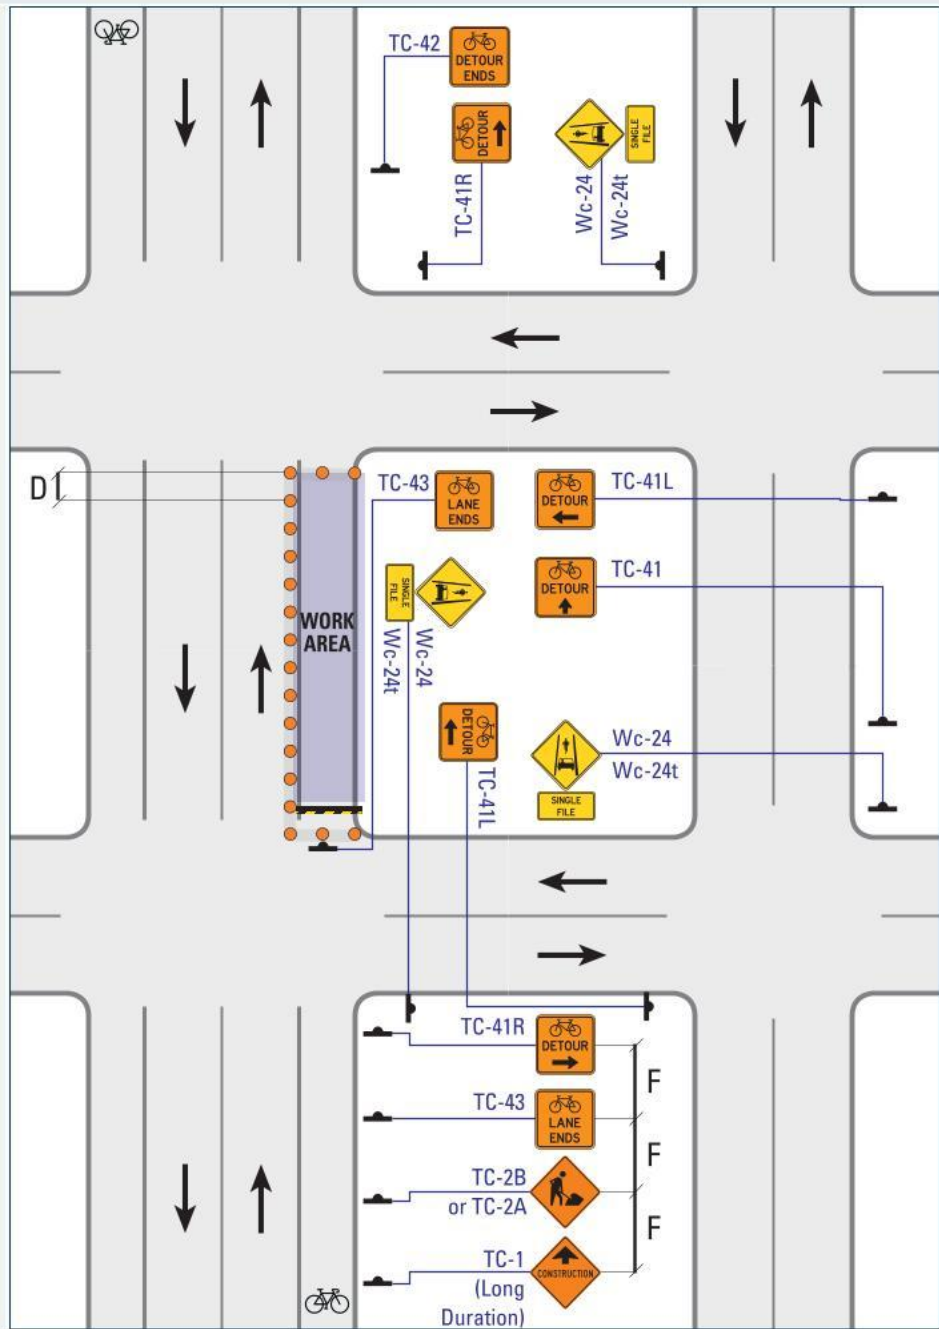

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
D	Maximum Distance between Markers (m)	6	9	9	12	12
F	Distance between Construction Signs (m)	50	90	120	140	150