

TI-5

Zone Painting: Intersection Turn Arrows

Two-Lane, Two-Way

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

i) Centreline Delineation required if workers present.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

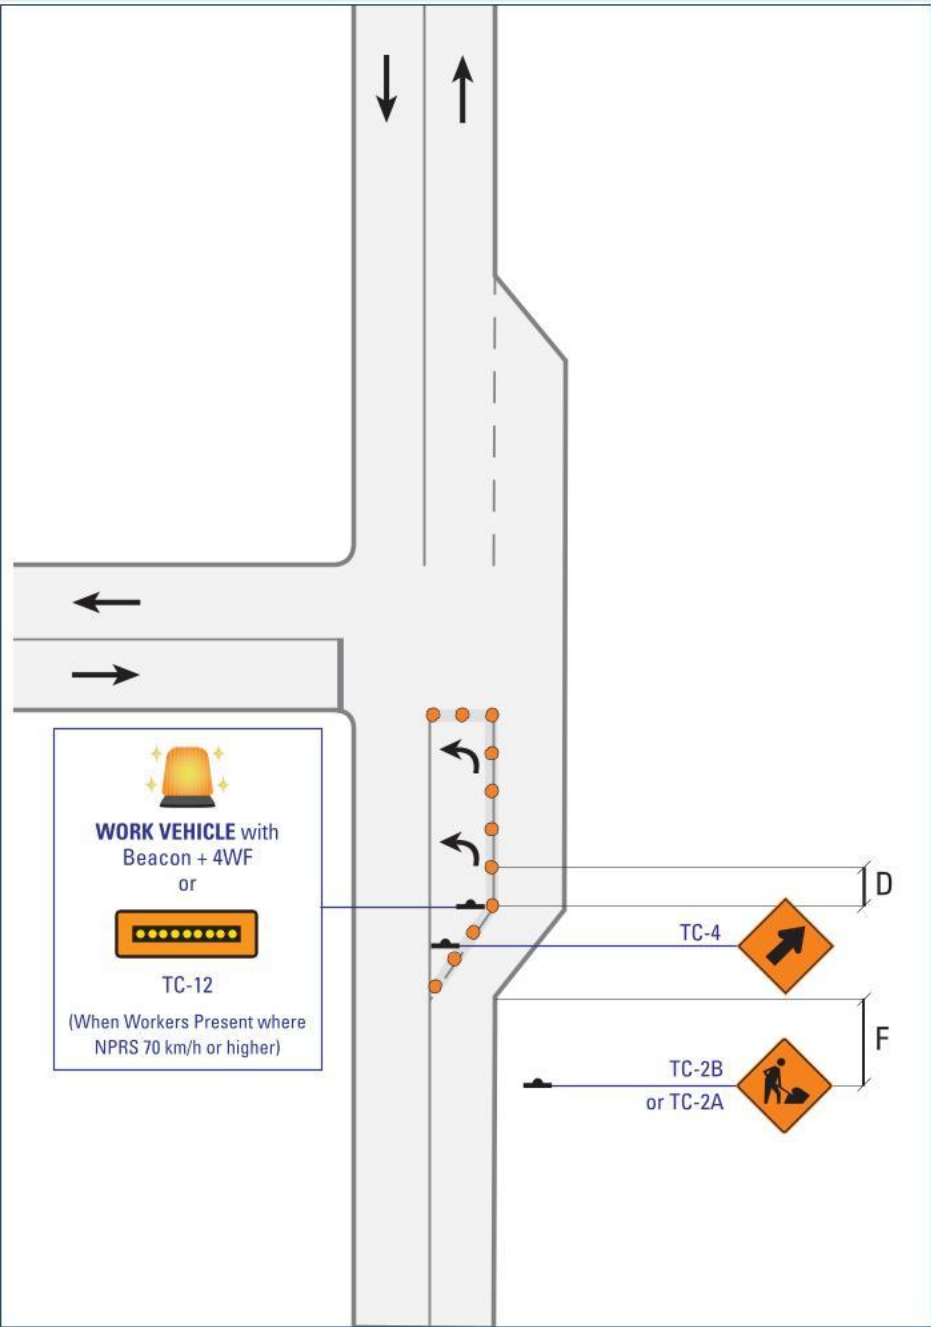

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150