

TI-8**Intersection: Near-Side Lane Closed (TCP)****Two-Lane, Two-Way**

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

NOTES

i) For Remote Control Device, see TS-19 as an example but this layout will need to be modified for the appropriate duration and highway configuration.

ii) When Traffic Volumes are High or when the intersection is signalized, consult the Road Authority to determine whether police assistance is required. Care should be taken by the TCP to coordinate with any intersection control such as traffic signals or STOP signs.

For further detail on Work Zone components see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#), and [TCP Table \(pg. 175\)](#).

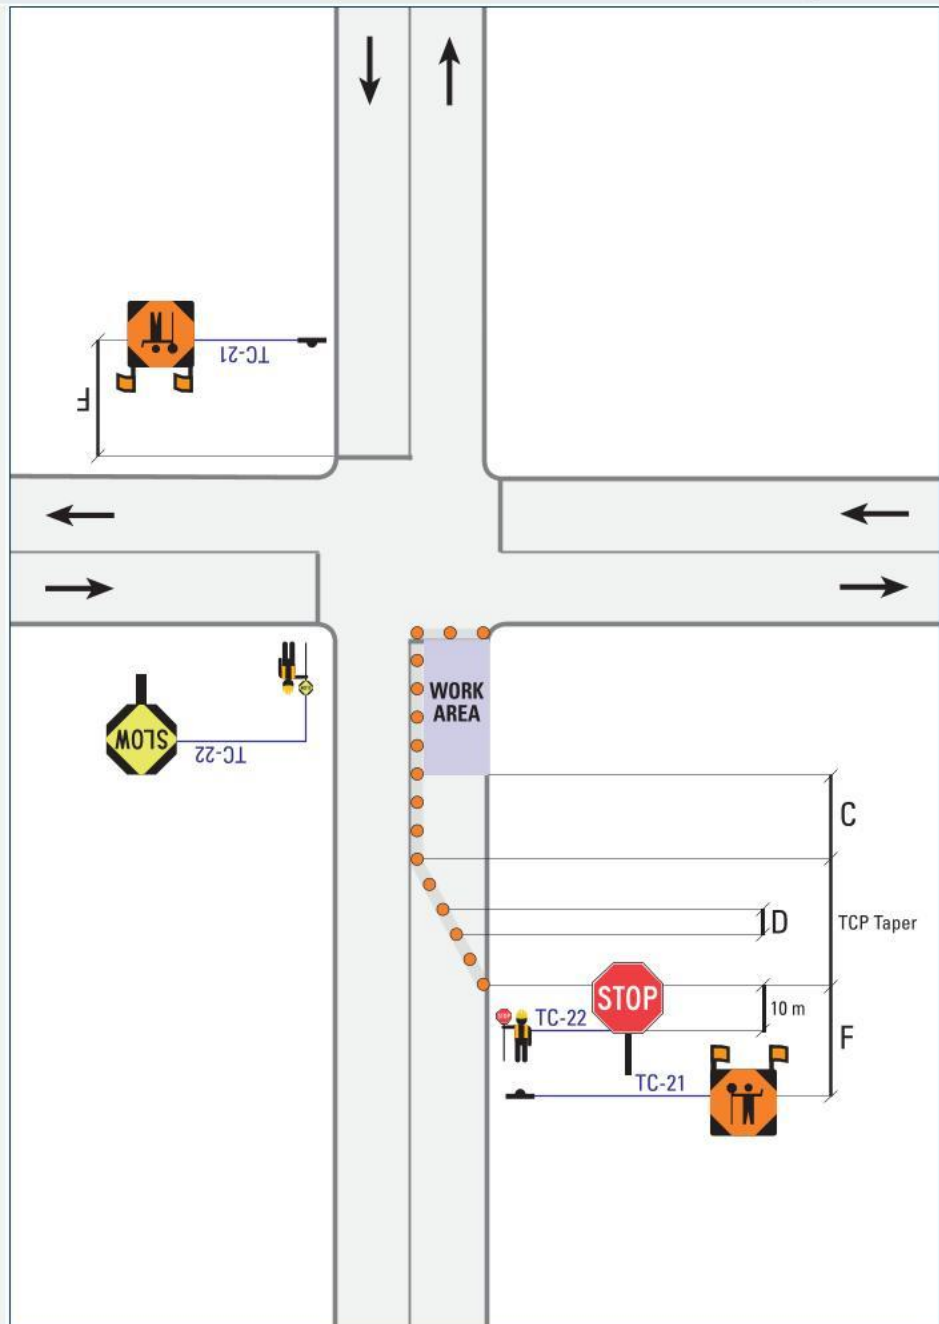

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
TCP	Taper Length for TCP Presence (m)	15	20	25	30	30
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	6	9	9	12
	Minimum Number of Markers for Taper	4	5	5	7	8
F	Distance between Construction Signs (m)	30	30	60	60	80