

TO-1**Roundabout: Encroachment****Two-Lane, Two-Way**

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

- i) It may be necessary to leave a wider lane width if there is a high truck percentage.
- ii) Total width of 6 m must be maintained. If minimum lane widths cannot be maintained then see Lane Closure layouts.
- iii) Markers are not required if a Work Vehicle with Beacon + 4WF or TC-12 is present.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

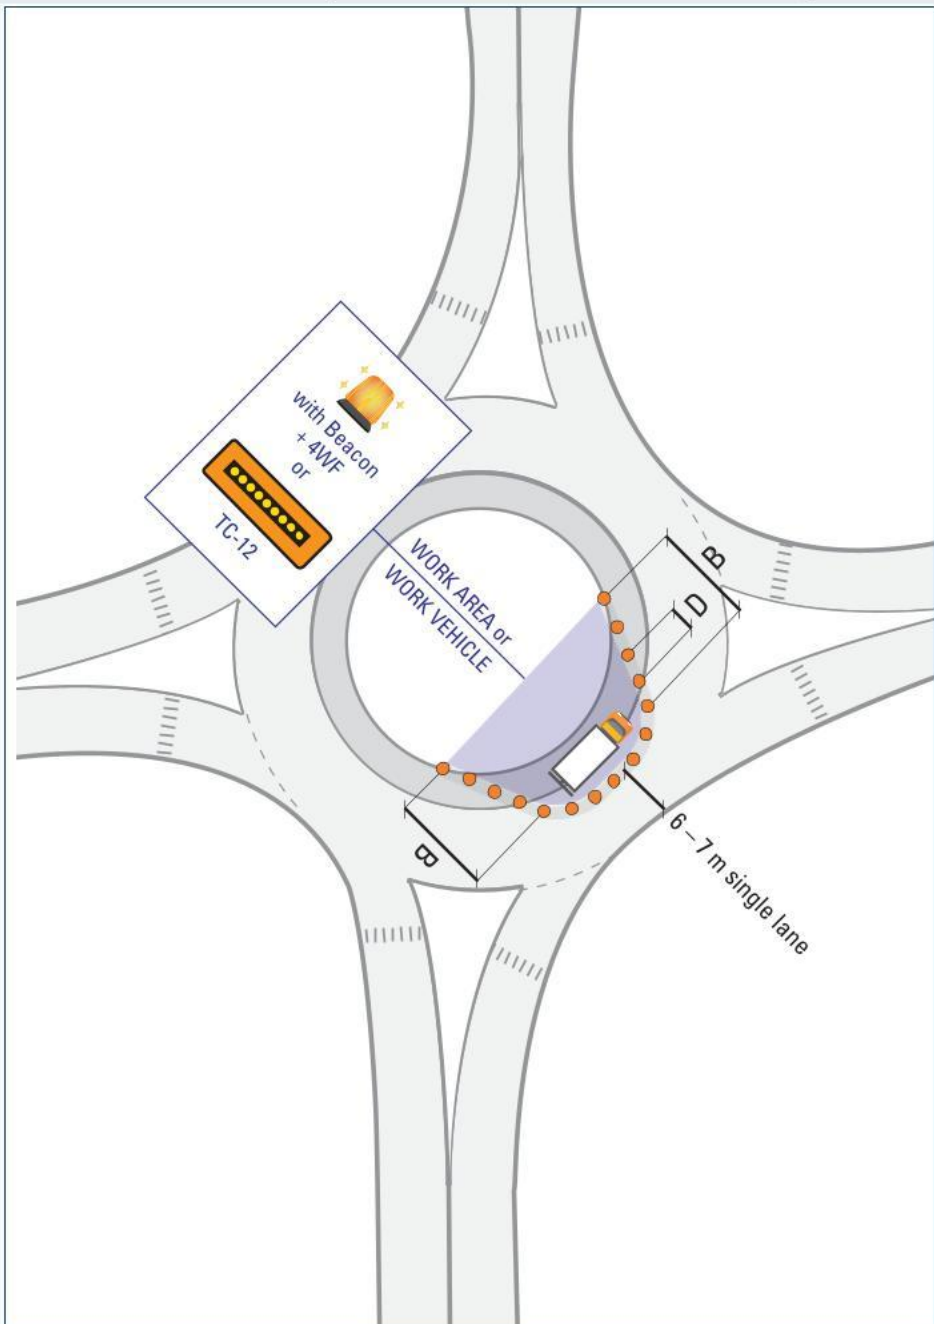

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
B	Shoulder Taper (m)	20	30	35	35	40
D	Maximum Distance between Markers (m)	6	6	9	9	12
	Minimum Number of Markers for Taper	4	5	5	7	8
F	Distance between Construction Signs (m)	30	30	60	60	80