

TO-3

Roundabout: Quadrant Closed (Traffic Control Persons)

Two-Lane, Two-Way

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration

NOTES

i) TCP must be in communication with each other to ensure only one entrance has a TC-22 showing SLOW at any time. TCP must be present at all times.

ii) Roundabout must be cleared before next entrance has SLOW indication.


iii) For Long Duration, TC-1 is required distance F in advance of the TC-2A or TC-2B on each approach. For Long Duration, TC-1A is also required on Rural Highways and/or if the NPRS is 70 km/h or higher.

iv) Use of AFAD or PLCS is NOT permitted.

v) Permanent signs (such as Rb-21, Rb-19, Rb-20, Rb-25, and overhead guide signs) that may conflict with the direction of travel the motorist is being directed must be covered. Permanent signing must be restored once contractor leaves site.

vi) Any existing signs that contradict or that are duplicated should be covered.

For further detail on Work Zone components see [Table B \(Short/Long, pg. 241\)](#), and [TCP Table \(pg. 175\)](#).

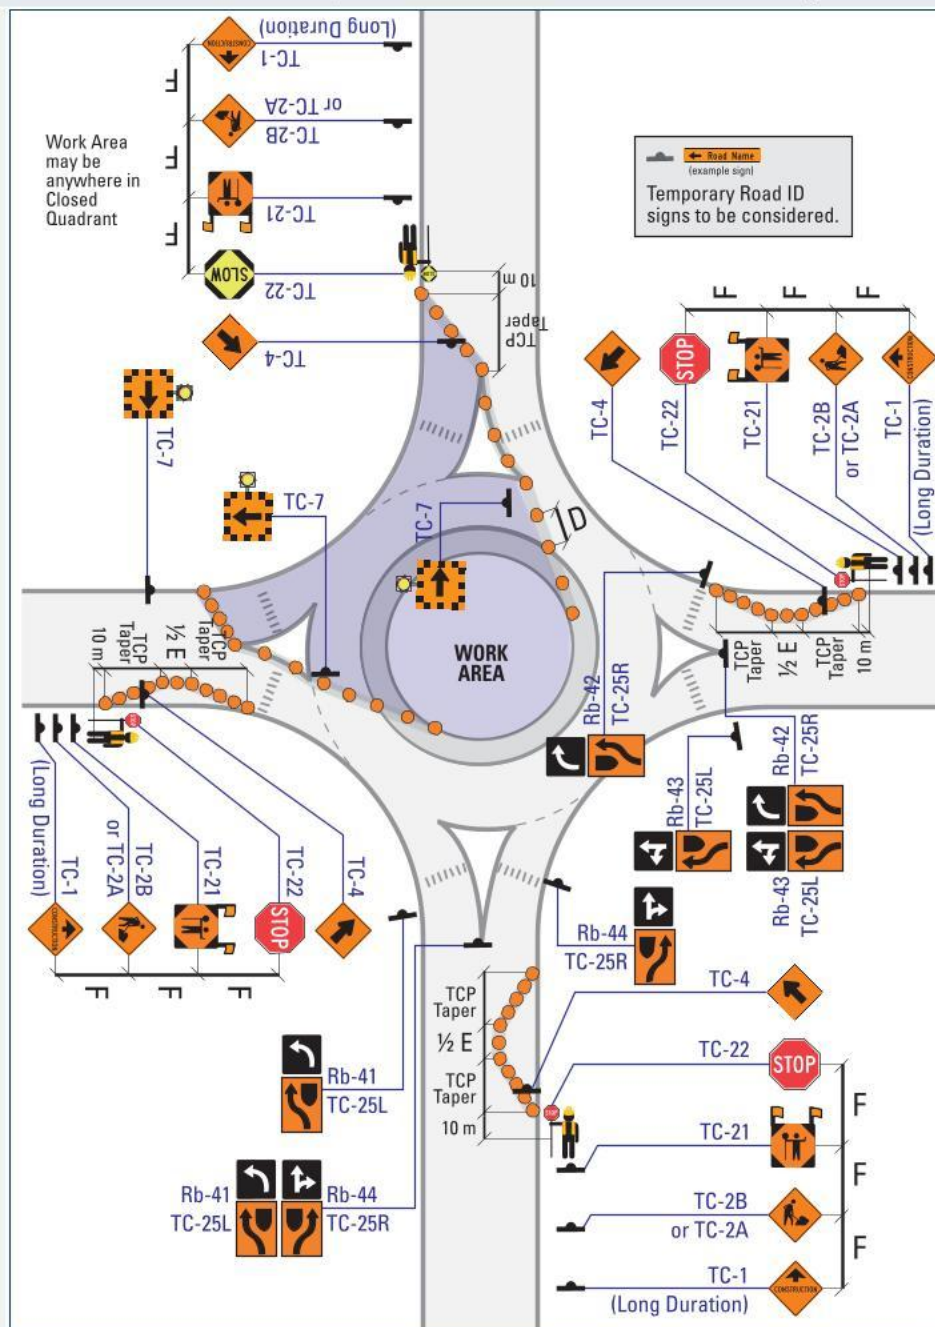

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
TCP	Taper Length for TCP Presence (m)	15	20	25	30	30
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
E	Minimum Tangent between Tapers (m)	60	85	155	180	200
F	Distance between Construction Signs (m)	50	90	120	140	150