

TS-10**Roadside Diversion****Two-Lane, Two-Way**

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

- i) Traffic should not be shifted onto a surface texture different from the main roadway without a speed reduction.
- ii) If the diversion is paved, temporary pavement markings are required, including Edge Lines, and the TC-13 should not be used.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

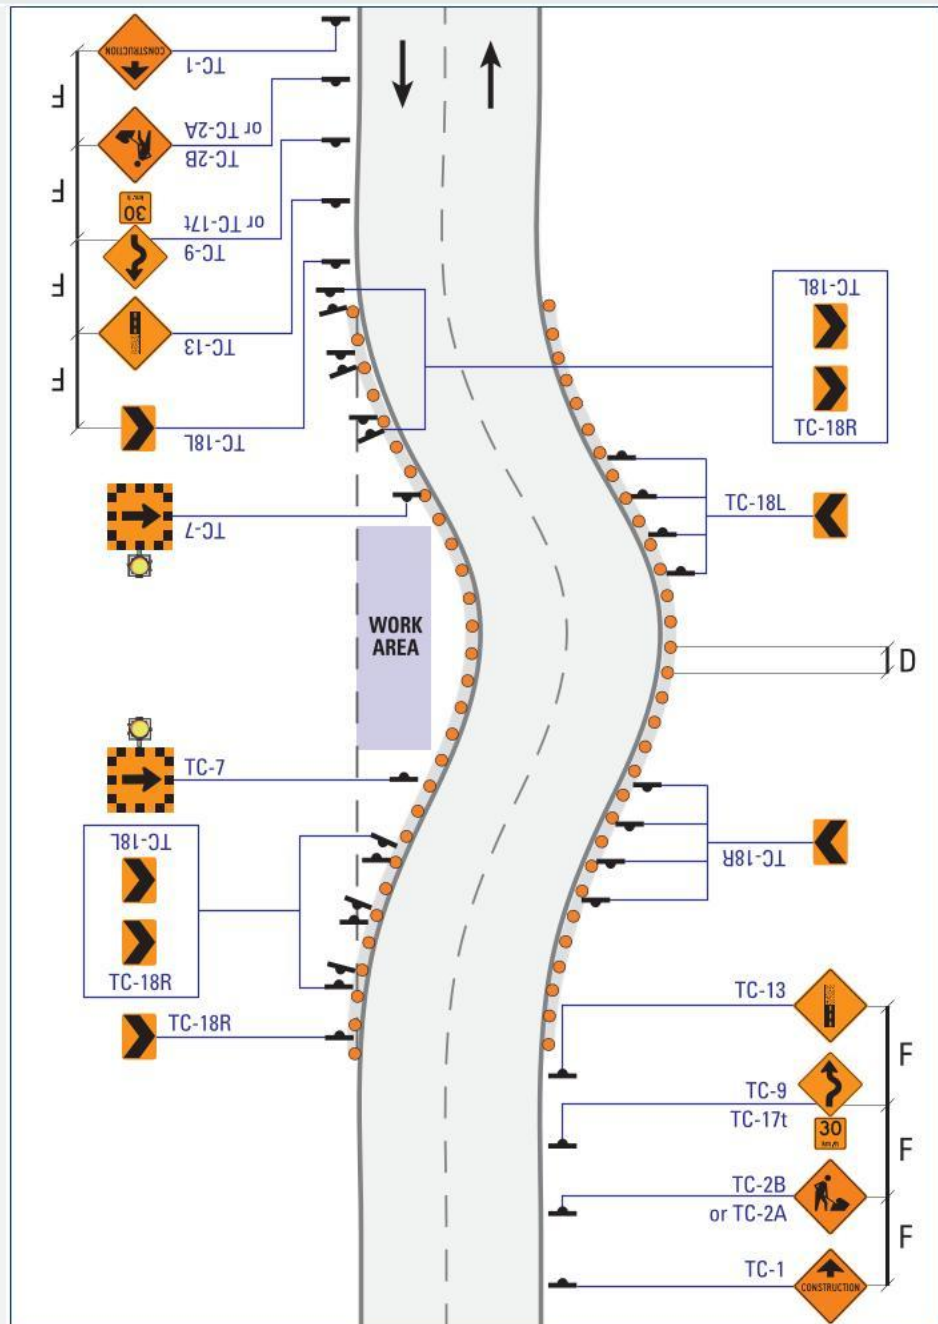

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
D	Maximum Distance between Markers (m)	6	9	9	12	12
F	Distance between Construction Signs (m)	50	90	120	140	150