

TS-11

Zone Painting

Two-Lane, Two-Way

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration

NOTES


i) A Crash Truck must be used on High Volume roads and/or where the NPRS is 80 km/h or higher. Road Authorities, other than MTO, may not require a Buffer Vehicle on Low Volume roads with NPRS lower than 80 km/h.

ii) Where shoulder is Intermittent, Sign Truck should drive with traffic flow until shoulder becomes available.

iii) The distance between Sign Truck and Buffer Vehicle may be adjusted to accommodate hills, curves, restricted visibility, or other specific conditions.

iv) Alternately, the Sign Truck on the shoulder may have a programmable VMS displaying approved message warning of line painting operations ahead.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

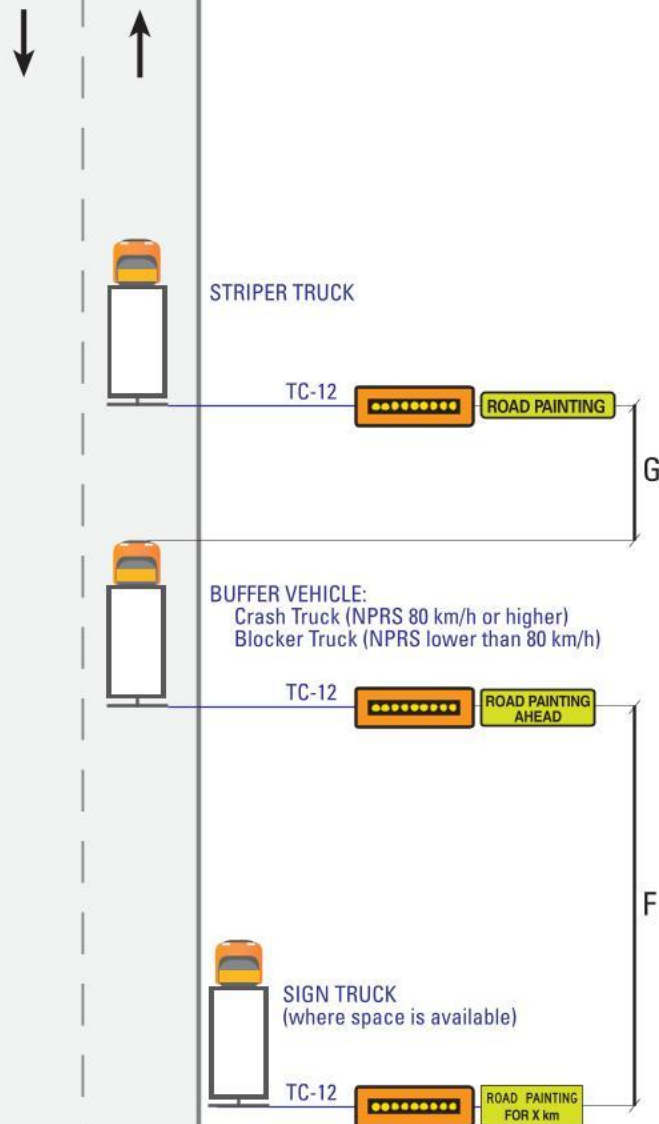

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
F	Distance between Construction Signs (m)	30	30	60	60	80
G	Mobile Work: Lateral Intrusion Deterrence Gap (LIDG) (m)	—	—	35	45	50