

TS-14**Lane Closed or Occupied (Traffic Control Persons)****Two-Lane, Two-Way**

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration

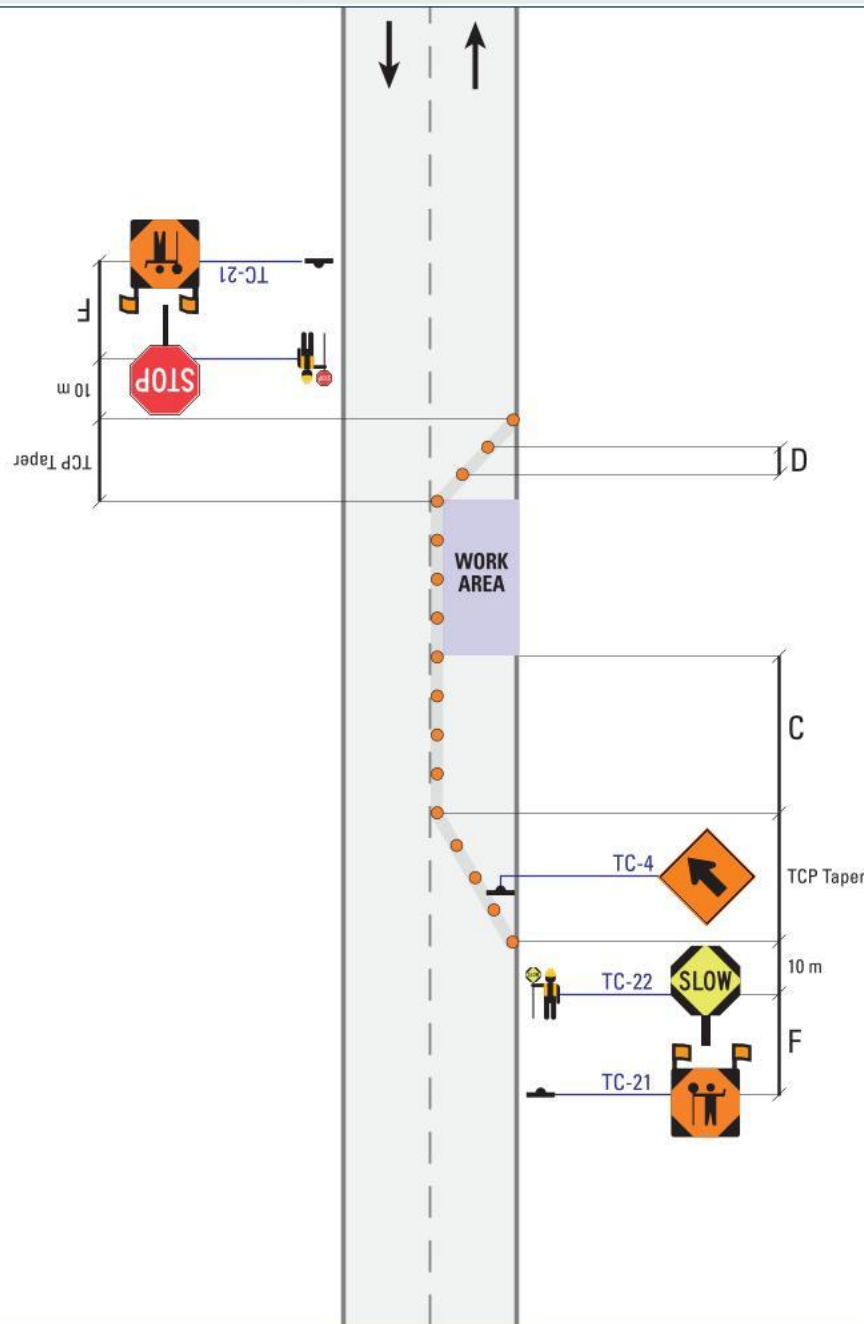
NOTES

i) Work on Low Traffic Volume roads (<3000 vehicles per day) with a Normal Posted Regulatory Speed lower than 70 km/h, the Markers are not required.

ii) On high speed (NPRS 70 km/h or higher) or where lane keeping/compliance is an issue, consider using TS-20 Lane Closed (Traffic Control Persons).

iii) For Short Duration projects on MTO highways, it is recommended to use TS-20.

For further detail on Work Zone components see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#), and [TCP Table \(pg. 175\)](#).

**Normal Posted Regulatory Speed (km/h)**

Label	Description	50	60	70	80	90
TCP	Taper Length for TCP Presence (m)	15	20	25	30	30
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	6	9	9	12
	Minimum Number of Markers for Taper	4	5	5	7	8
F	Distance between Construction Signs (m)	30	30	60	60	80