

TS-16**Lane Closed (Portable Lane Control Signals)****Two-Lane, Two-Way**

Mobile Operations

Intermittent

Very Short Duration

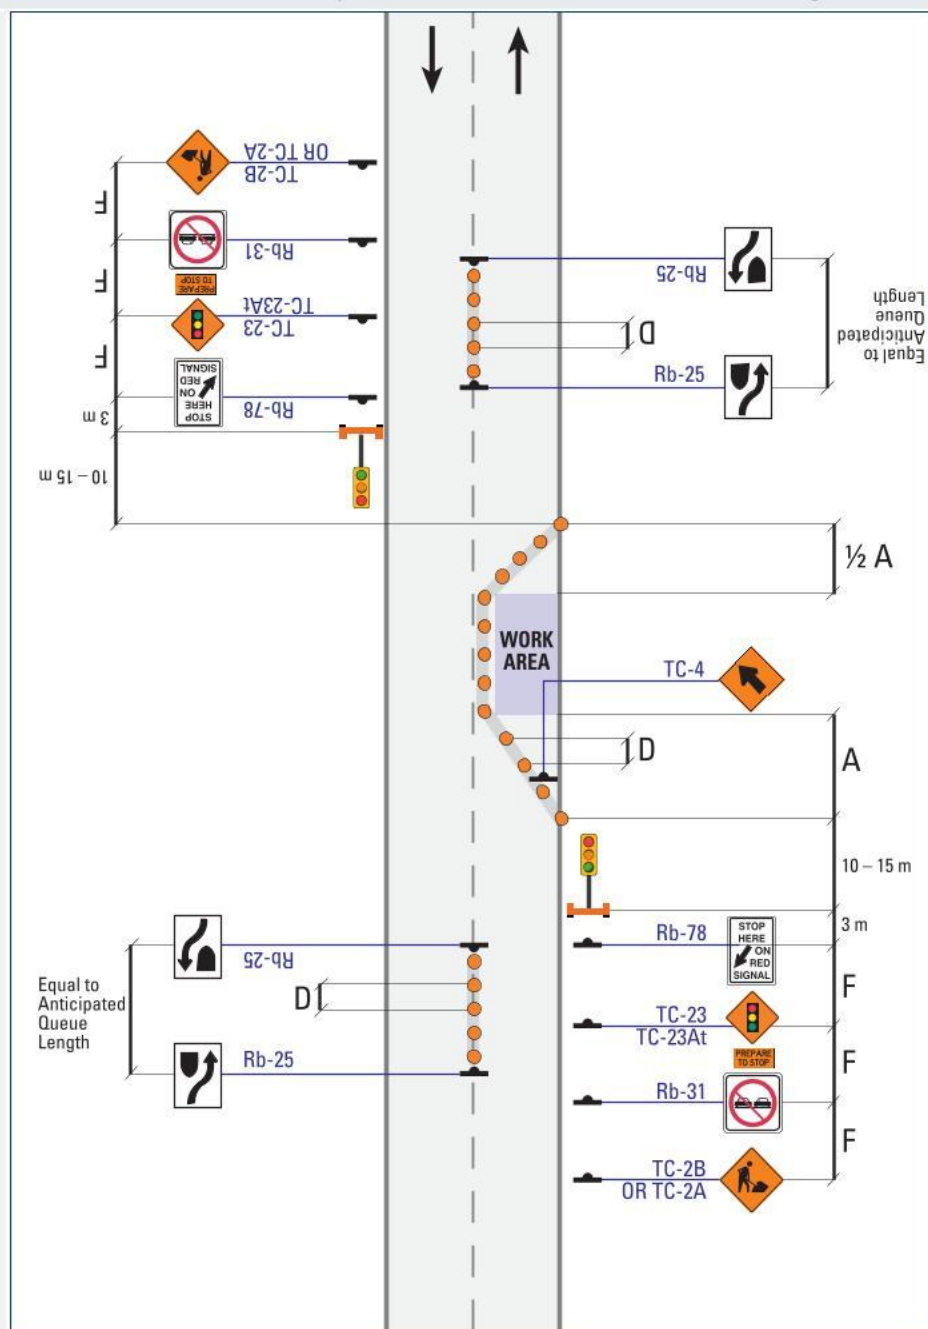
Short Duration

Long Duration

NOTES

- i) To determine the appropriate timing of the lane control signals, see Section 4.
- ii) Lane control signals are only to be used while the contractor is on site and on roads with NPRS of 90 km/h or lower. Portable signals that are to operate during Long Duration work, or when no contractor is present, are Portable Temporary Traffic Signals (PTTS) and require Road Authority approval of layout and signal timing. MTO applications require the completion of PHM-125 (see OTM Book 12).

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

**Normal Posted Regulatory Speed (km/h)**

Label	Description	50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150