

TS-17**Lane Closed (Yield to Oncoming Traffic) (Low Volume Roads)****Two-Lane, Two-Way**

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

- i) Use only on roads with Low Traffic Volume (< 3000 vehicles per day).
- ii) To be used for short length Work Areas (<150 m).
- iii) May also be used on roads with no centreline.
- iv) Use only where there is unobstructed visibility of oncoming traffic in both directions.
- v) Work Area may or may not contain a Work Vehicle. See General Notes to Layouts #4. If Work Vehicle has a TC-12, it must be in bar mode.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

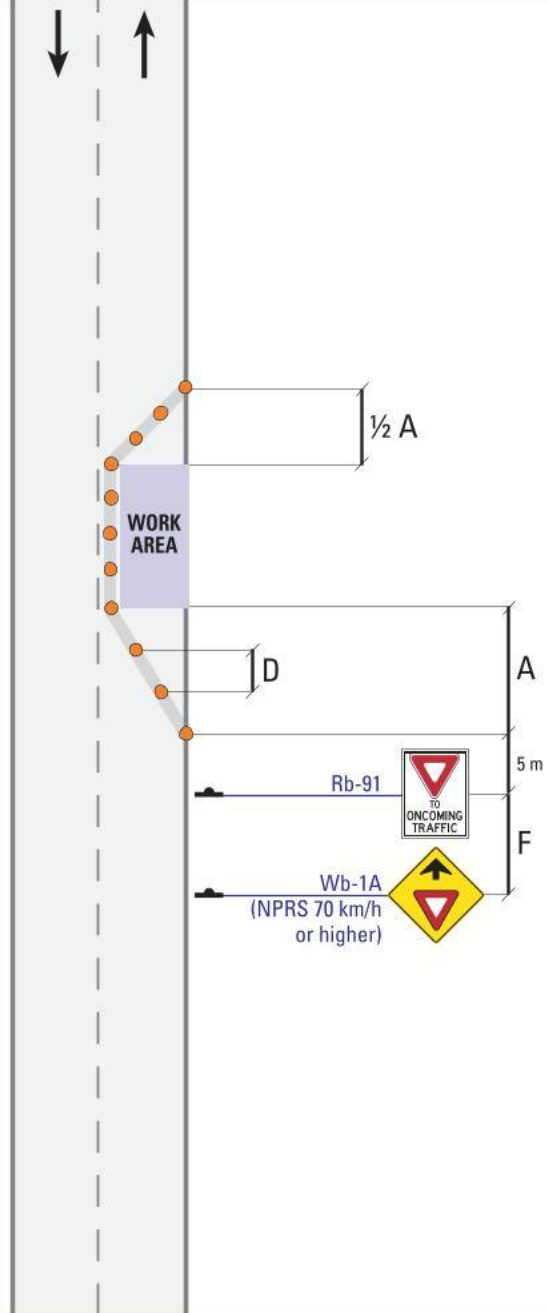

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	100	100	110
D	Maximum Distance between Markers (m)	6	6	9	9	12
	Minimum Number of Markers for Taper	4	5	5	7	8
F	Distance between Construction Signs (m)	30	30	60	60	80