

TS-18**Lane Closed (Yield to Oncoming Traffic) (Low Volume Roads)****Two-Lane, Two-Way**

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

- i) Use only on roads with Low Traffic Volume (< 3000 vehicles per day).
- ii) To be used for short length Work Areas (<150 m).
- iii) May also be used on roads with no centreline.
- iv) Use only where there is unobstructed visibility of oncoming traffic in both directions.
- v) Work Area may or may not contain a Work Vehicle. See General Notes to Layouts #4. If Work Vehicle has a TC-12, it must be in bar mode.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

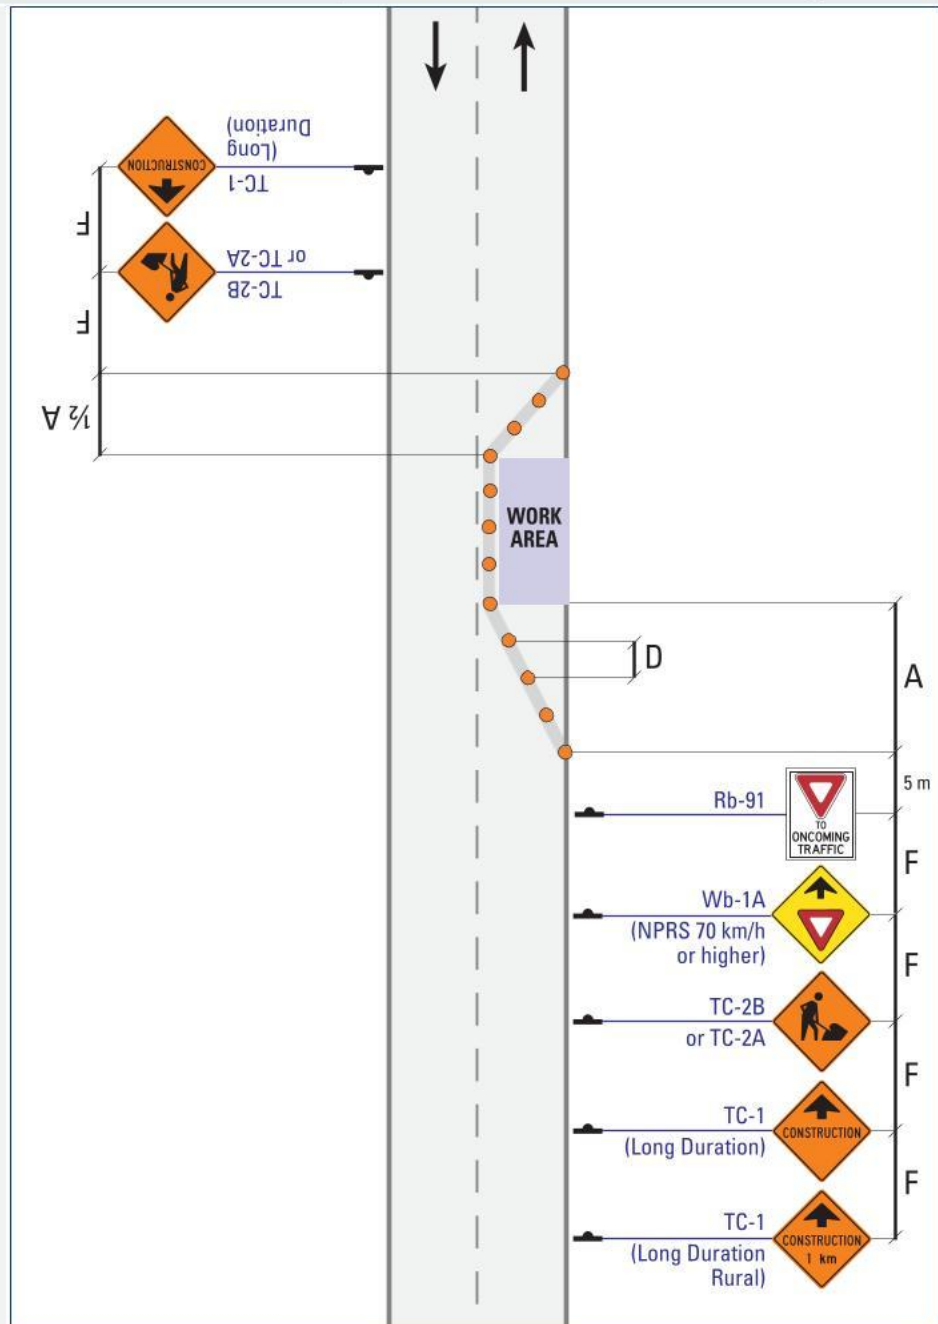

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150