


TS-19**Lane Closed (Automated Flagger Assistance Device)****Two-Lane, Two-Way****Mobile Operations****Intermittent****Very Short Duration****Short Duration****Long Duration****NOTES**

- i) An AFAD shall not be operated unless a TCP is positioned close enough to enable them to display a TC-22 STOP/SLOW paddle to control traffic in the event of an AFAD malfunction and
- ii) If the AFAD is within a designated bilingual area and the municipality has passed a bylaw under the FLSA section 14(1), the Rb-79 must be bilingual as should the TC23At sign.

For further detail on Work Zone components, see Table A (Intermittent/Very Short pg.238) and Table B (Short/Long, pg. 241).

Noted that for further details on work zone components, the reader should see Table A for Intermittent and Very Short duration work and Table B for Short Duration work.

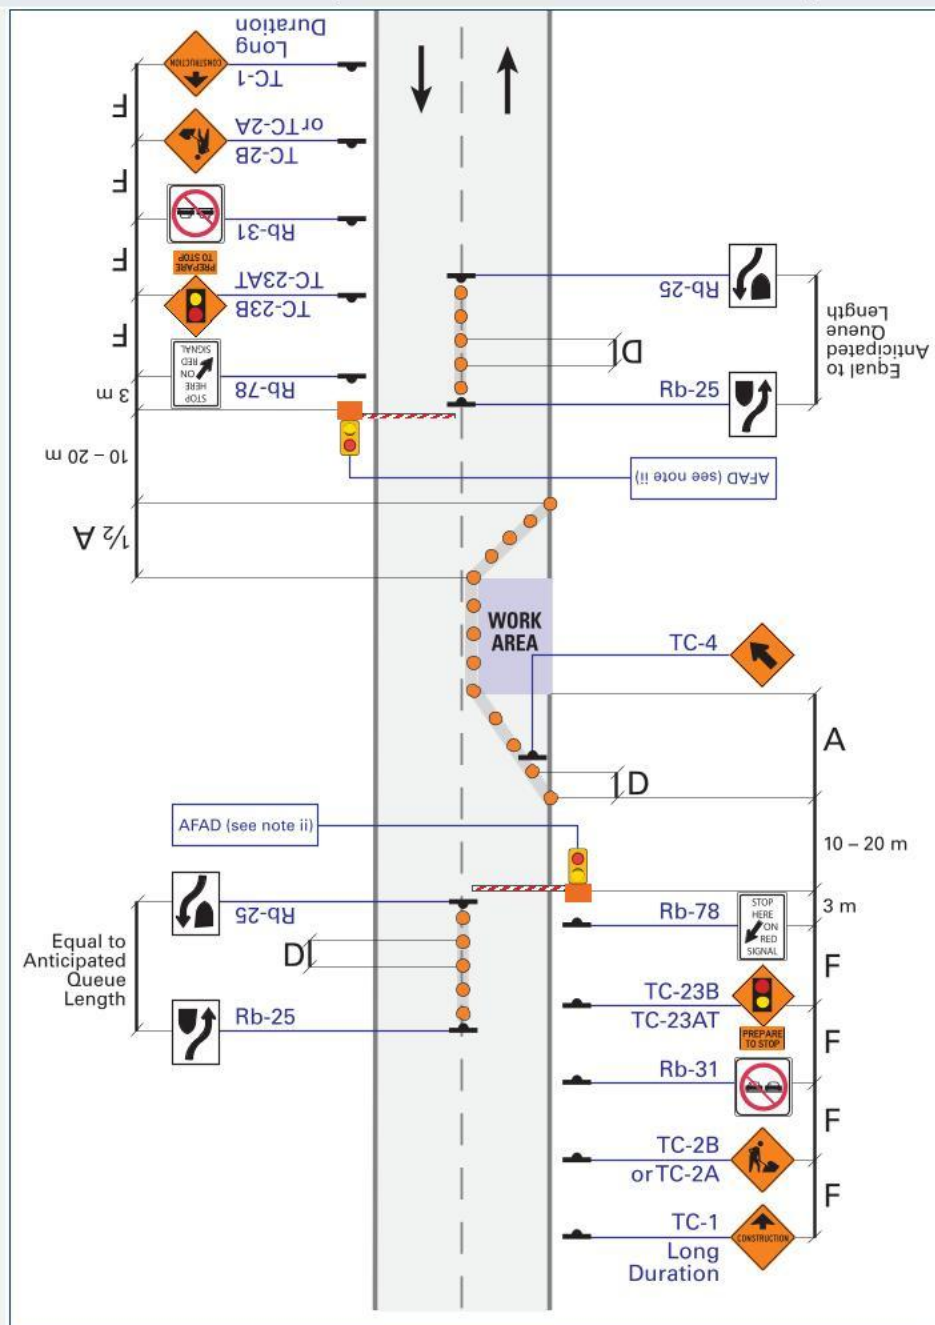

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150