
TS-20 Lane Closed (Traffic Control Persons)

Two-Lane, Two-Way | Mobile Operations | Intermittent | Very Short Duration | **Short Duration** | **Long Duration**

NOTES

i) Centreline Markers between the Rb-25 signs are optional and may be used in one or both approaches if lane keeping becomes an issue. For projects on MTO highways, it is recommended to use Markers in both approaches.

For further detail on Work Zone components see Table B (Short/Long, pg. 241).

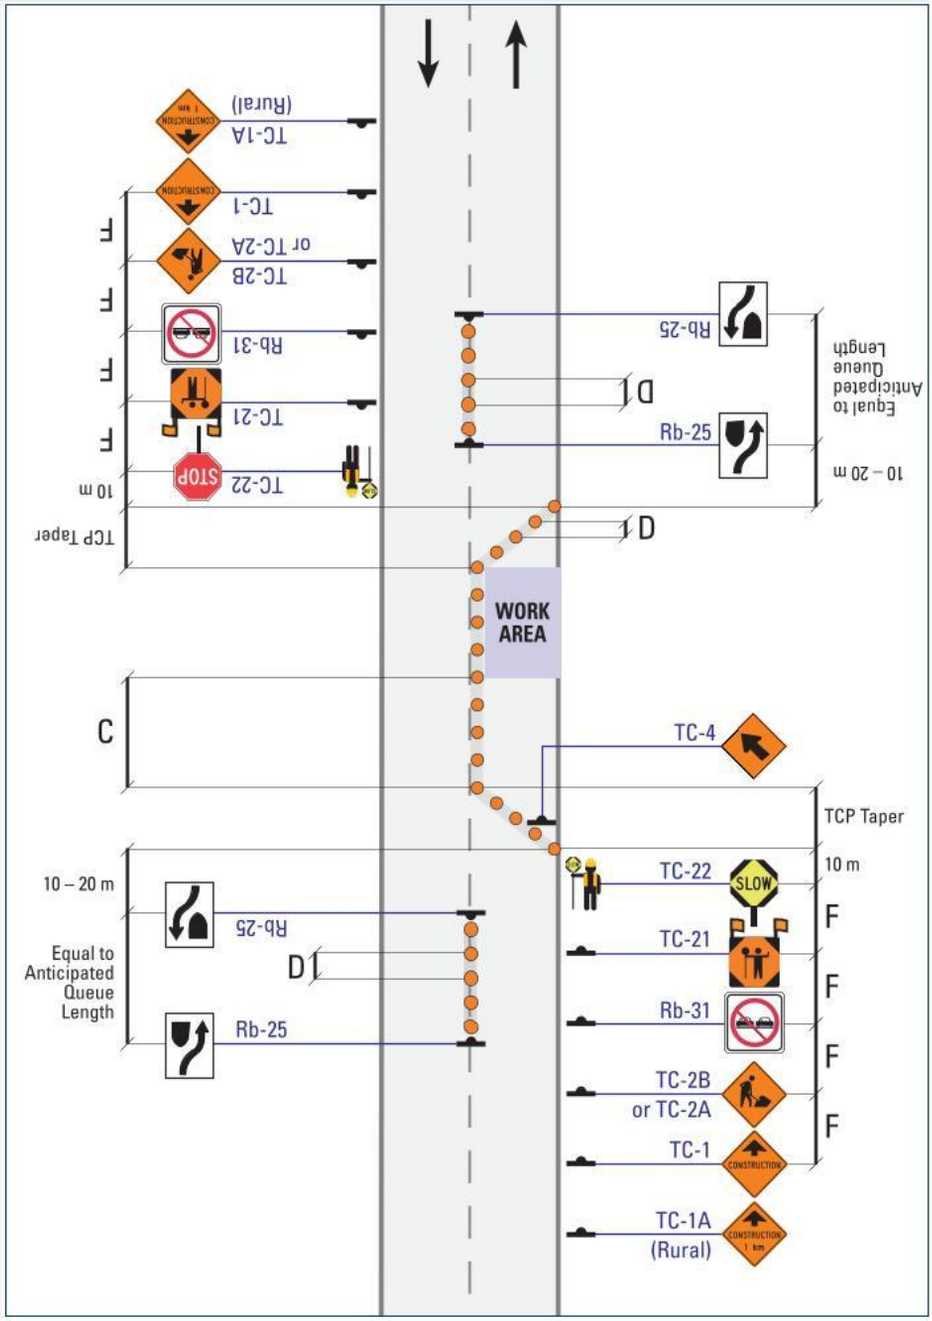

		Normal Posted Regulatory Speed (km/h)				
Label	Description	50	60	70	80	90
TCP	Taper Length for TCP Presence (m)	15	20	25	30	30
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150