

TS-25**Bicycle Lane Diversion: Bicycle Lane Shift****Two-Lane, Two-Way**

Mobile Operations

Intermittent


Very Short Duration

Short Duration

Long Duration**NOTES**

- i) If space permits, TC-54 should be used in place of TC-51.
- ii) AODA-compliant ramps are required if the curb is raised.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

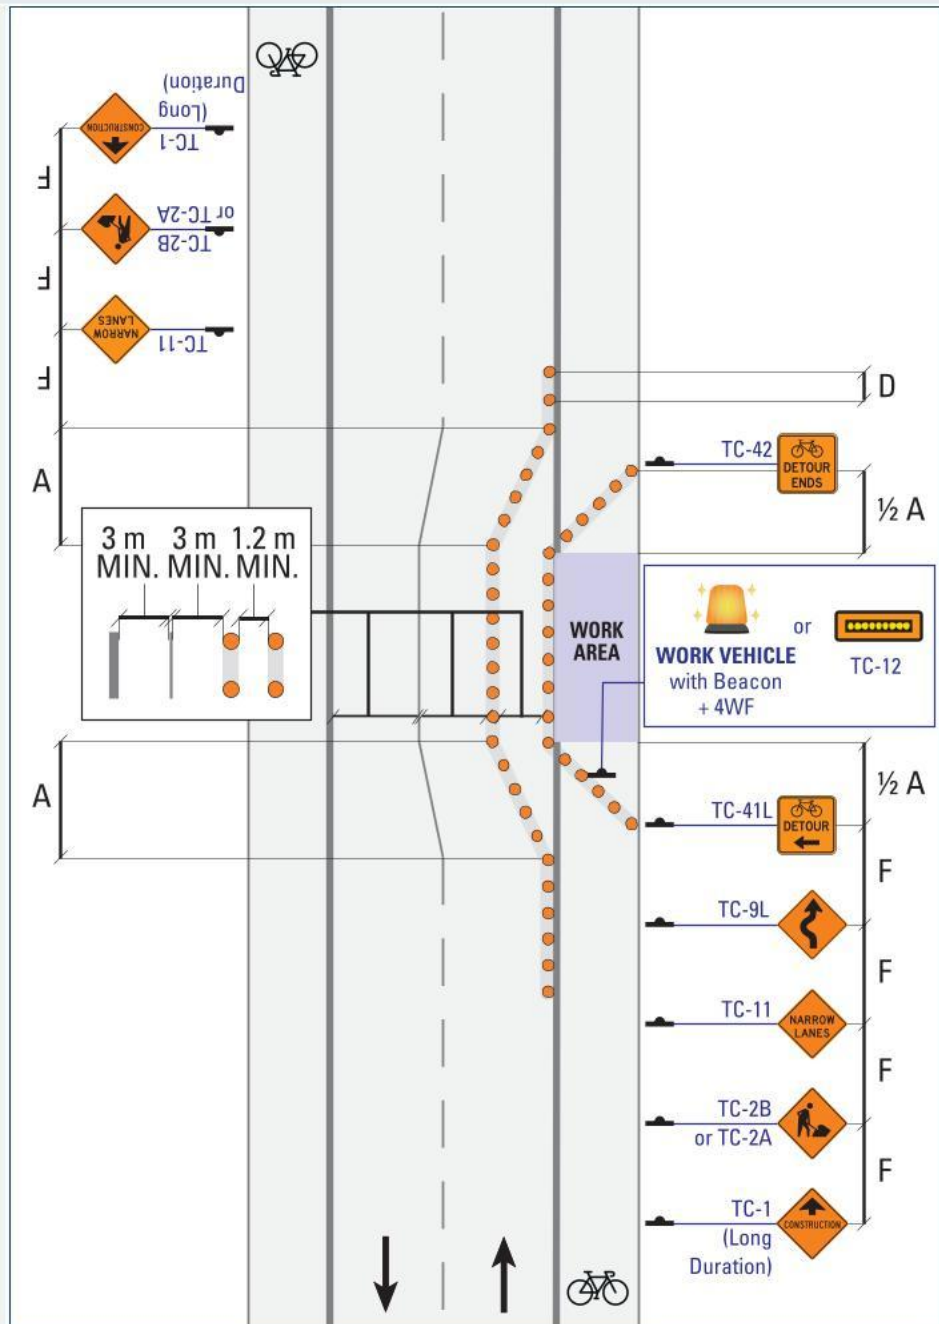

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150