

TS-3

Intermittent Work

Two-Lane, Two-Way

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration

NOTES


- i) Termination Taper optional.
- ii) Work Area may or may not contain a Work Vehicle. See General Notes to Layouts #4.
- iii) A Work Vehicle with a TC-12 may replace Markers.

Where a worker is moving within the Intermittent Work Area with only brief stationary moments, for example, surveying:

- Worker requires sight distance (refer to H in Table).
- Spotter(s) required when sight distance is not available.
- Where clear and constant verbal communication is not possible (i.e., distance, noise), spotter(s) and worker must use two-way communication devices.
- Where required sight distances (refer to H in Table) are present and the worker/technician's activities permit a continuous consciousness of approaching traffic, a spotter may not be required.
- Worker must not interfere with traffic.

Note: this would allow for a single worker operation (i.e., surveyor or possibly one-person pothole repair).

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

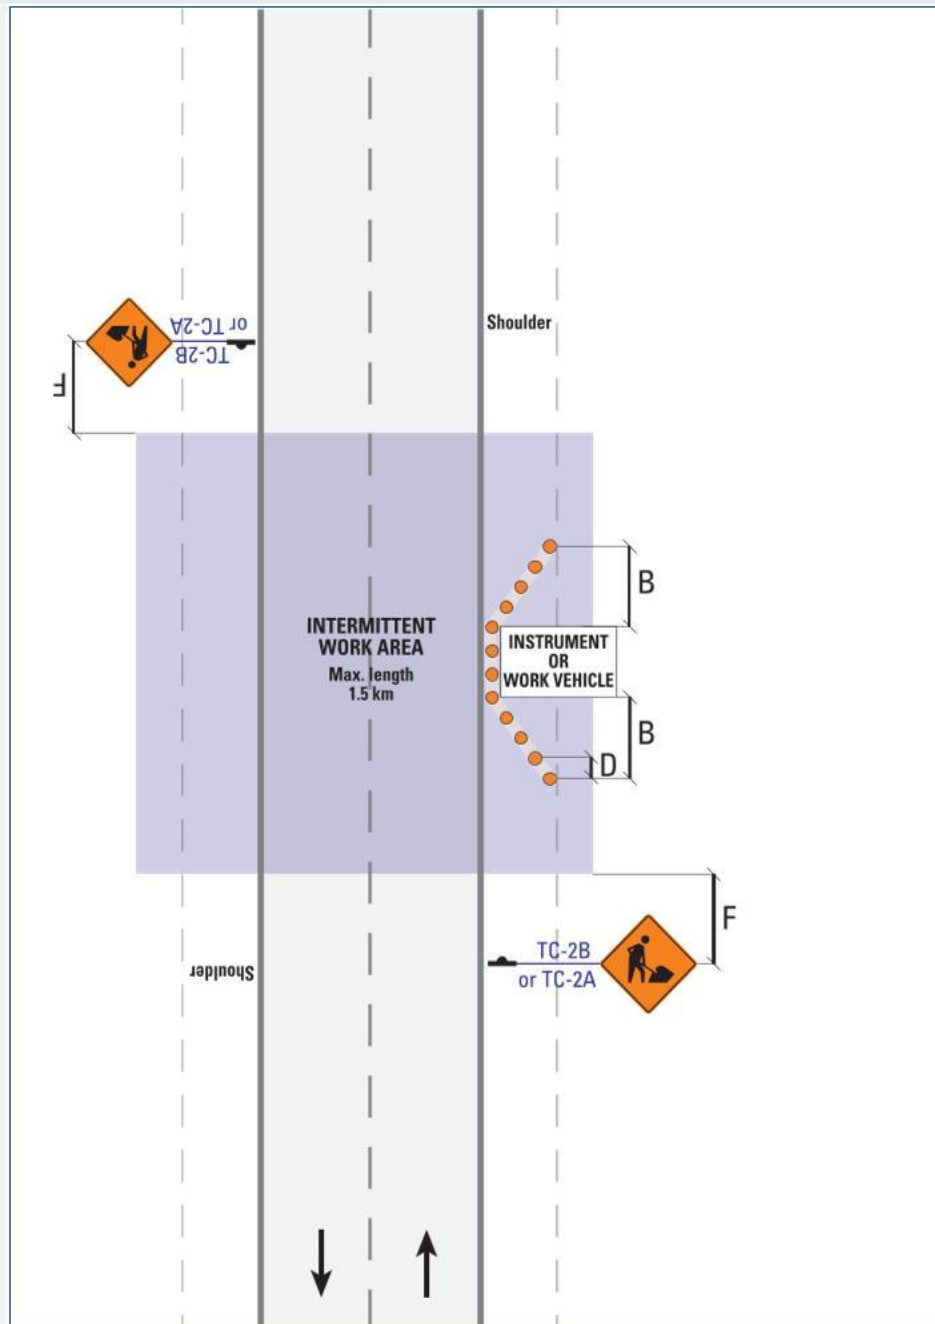

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
B	Shoulder Taper (m)	20	30	55	60	70
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150
H	Sight Distance (m)	150	150	200	250	250