

TS-7 Lane Encroachment**Two-Lane, Two-Way**

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

- i) If Available Lane Width (ALW) is less than 3 m, use Partial Lane Shift (See [TS-8](#), [TS-9](#)) or Lane Closures ([TS-15](#) to [TS-20](#)).
- ii) In addition to the minimum requirement of 3 m temporary lane width, an offset of 0.3 m to 0.6 m between Markers and the edge of the traveled lane is desirable.
- iii) Centreline Markers are optional and are to be used if lane keeping is an issue.
- iv) On unpaved roads with Low Volume (<3000 vehicles per day):
Where remaining roadway width is at least 6 m, and ALW is less than 3 m, use Rb-91, a distance F upstream of start of Taper, and move the TC-1 and TC-2B an additional distance F upstream.
- v) Work Area may or may not contain a Work Vehicle. See General Notes to Layouts #4.
- vi) A Work Vehicle with a TC-12 may replace Markers for Short Duration work where NPRS is 60 km/h or lower.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

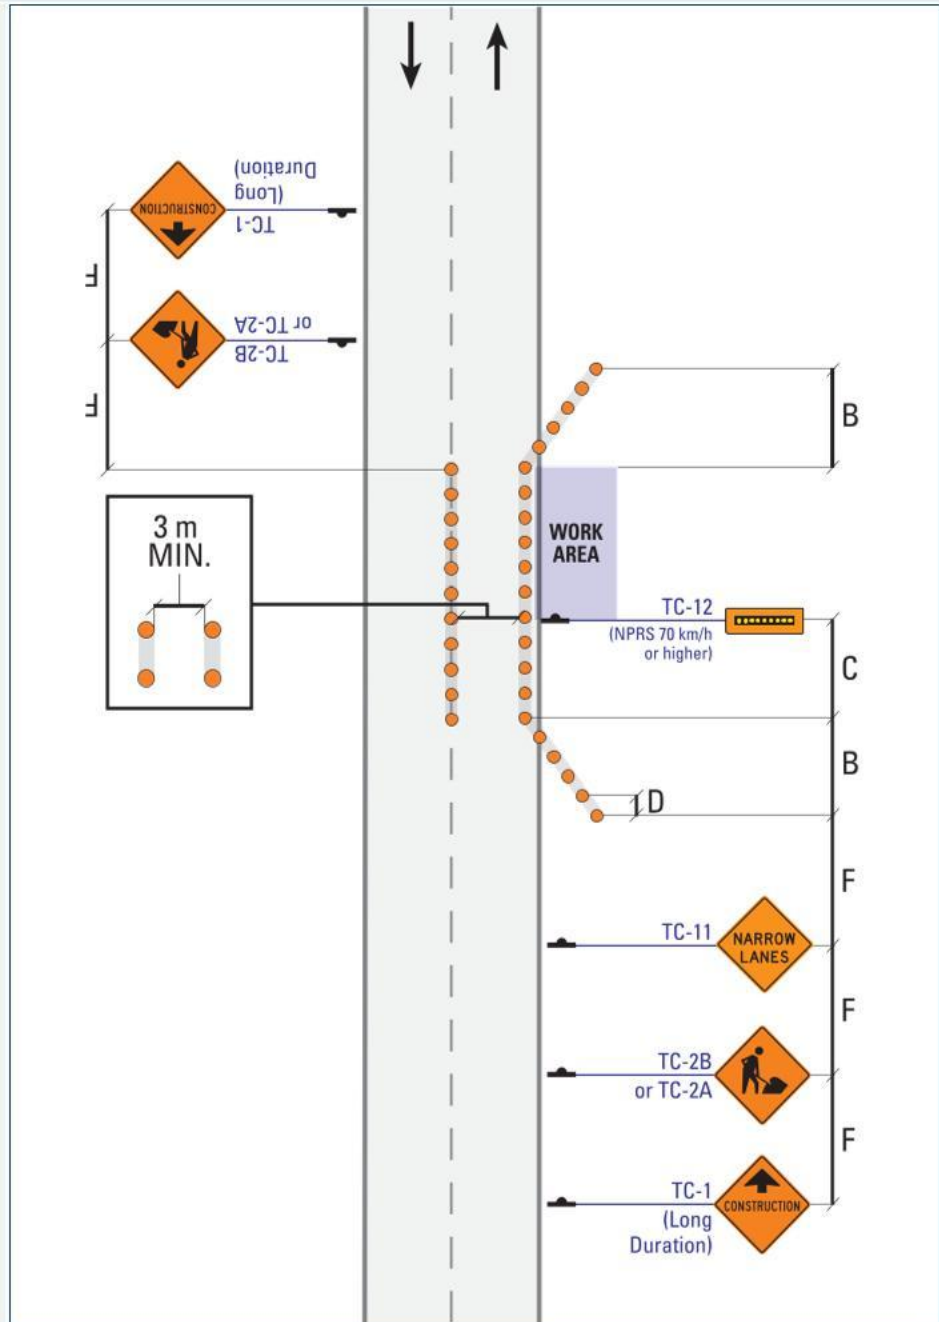

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
B	Shoulder Taper (m)	20	30	55	60	70
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150