

TS-9**Partial Lane Shift: Wide Platform****Two-Lane, Two-Way**

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

- i) Remaining roadway must be at least 6 m plus the width of channelizers. A lane width must be at least 3 m in each direction.
- ii) In addition to the minimum requirement of 3 m temporary lane width, an offset of 0.3 m to 0.6 m between Markers and the edge of the traveled lane is desirable.
- iii) Traffic should not be shifted onto a surface texture different from the main roadway without a Posted Speed Reduction.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

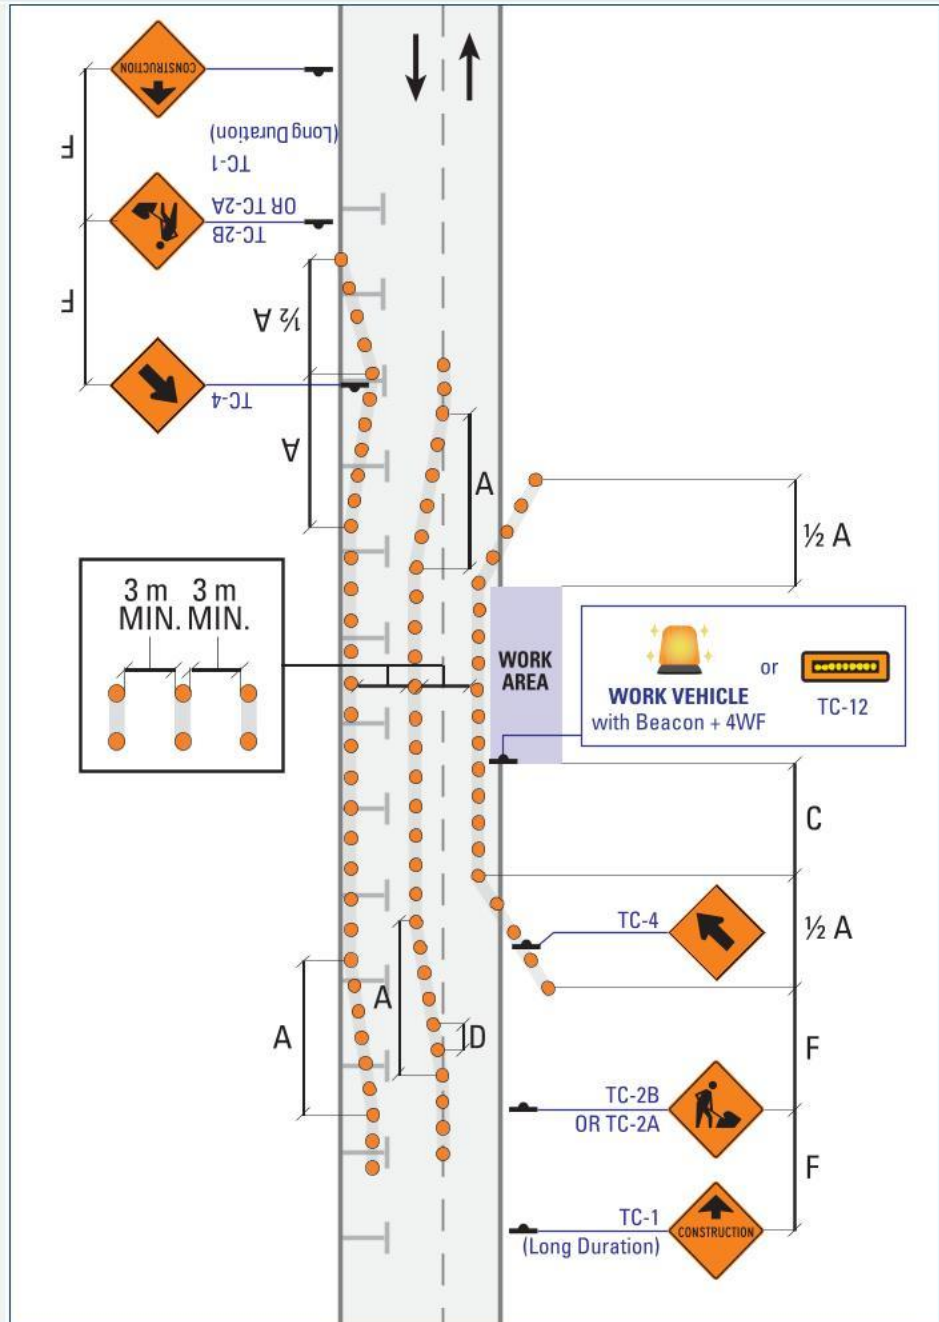

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150