

UI-14

Intersection: Far-Side Lane Closed

Multi-Lane Undivided

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

- i) Right Lane Closed: mirror image (Advance signs (TC-1 & TC-2) not required in opposing direction).
- ii) Measures should be taken to make sure on-street parking is not allowed next to the Work Area or Taper.
- iii) It may be necessary to prohibit left turns.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

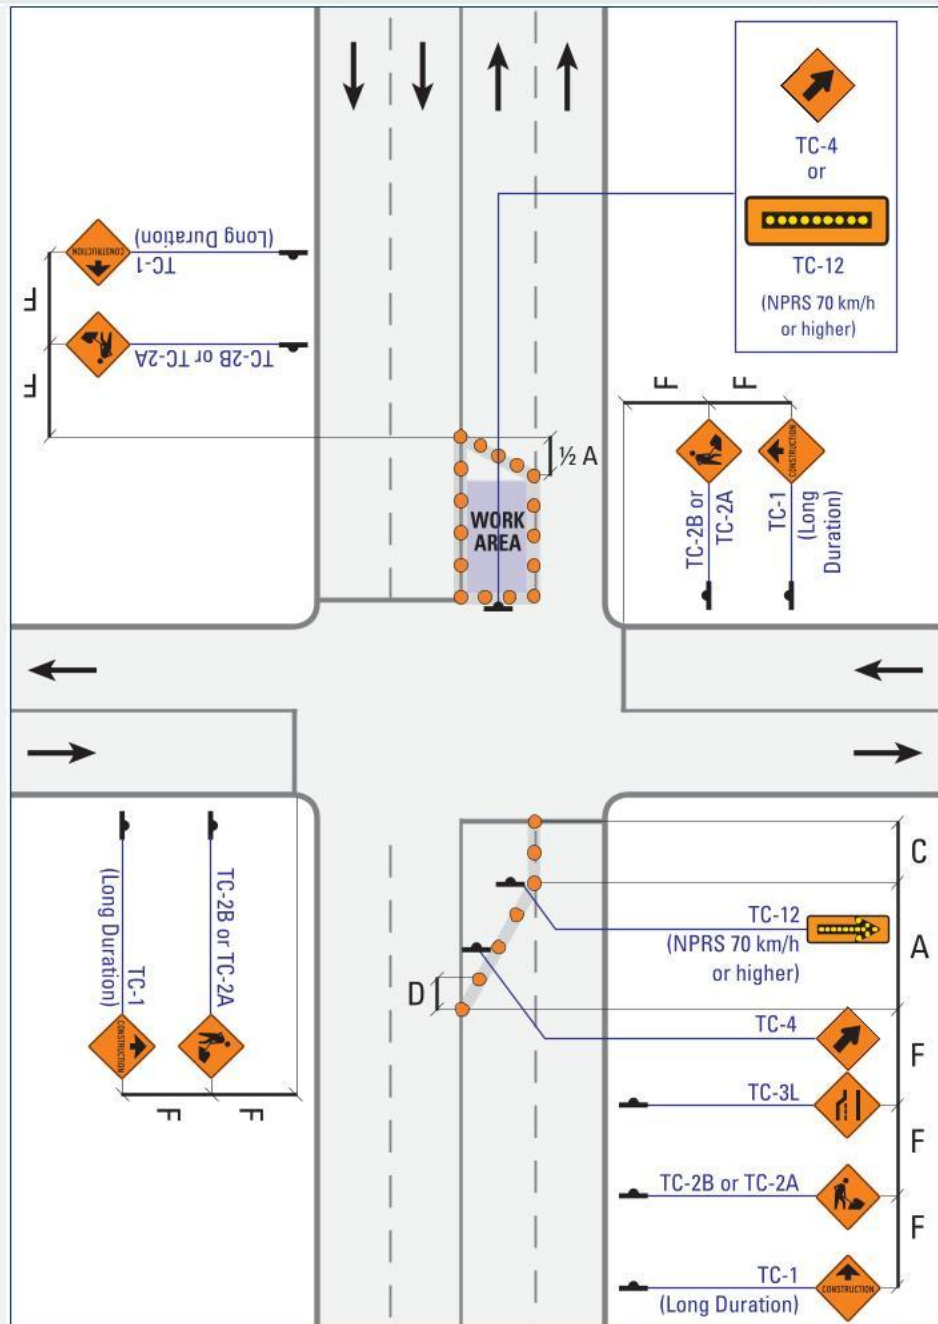

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	30	90	120	140	150