

## UI-17

## Intersection: Right Turn Lane (Far-Side Right Lane Closed)

## Multi-Lane Undivided

## Mobile Operations

## Intermittent

## Very Short Duration

## Short Duration

## Long Duration


## NOTES

i) If space permits, use TC-53A or TC-53B to surround the Work Area, otherwise reduce spacing between TC-54.

ii) It may be necessary to prohibit certain turning movements.

iii) It may be necessary to prohibit right turn truck movements.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

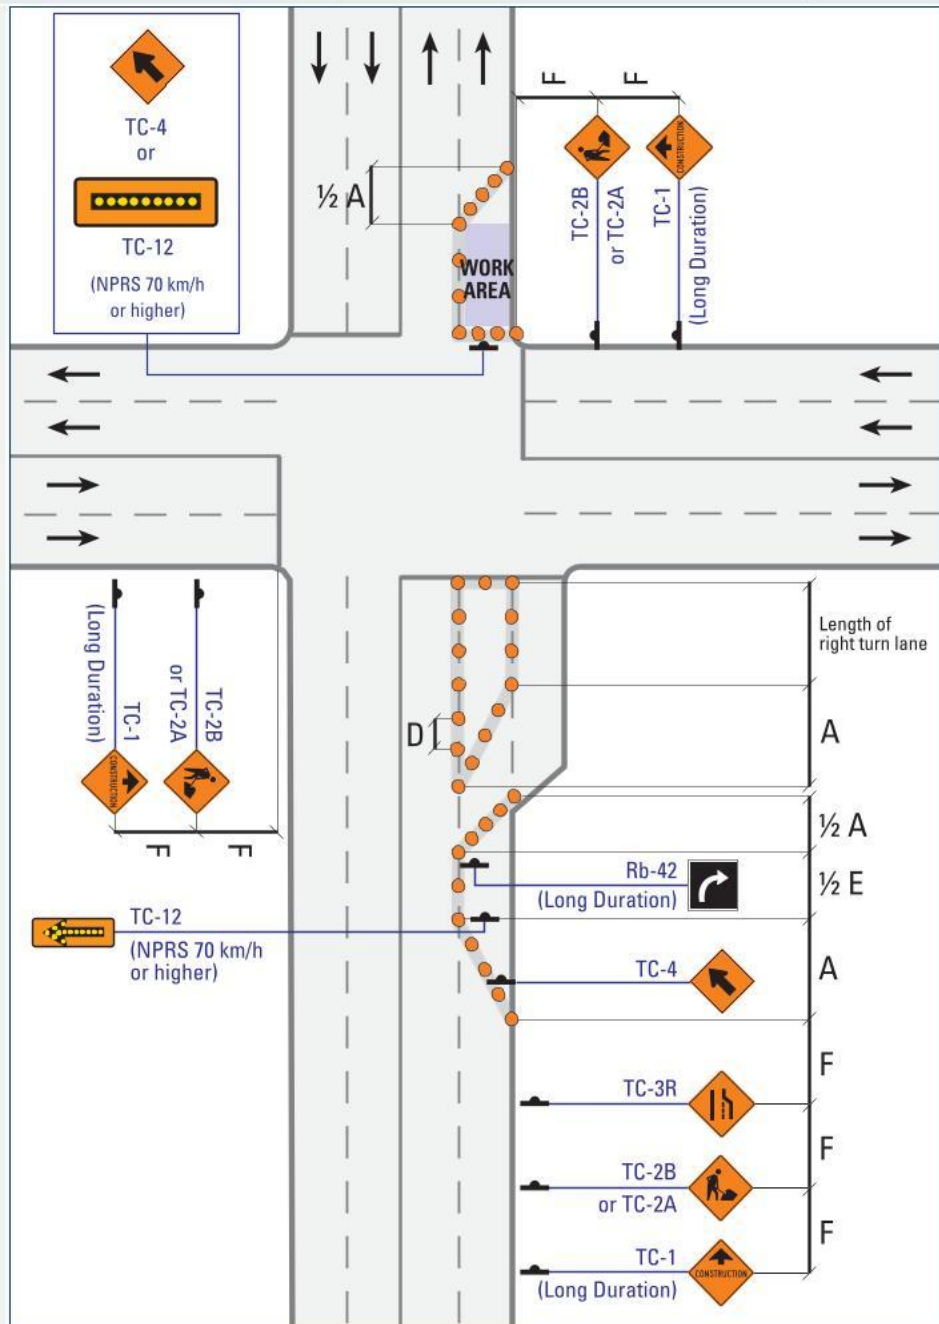

| Label    | Description                             | Normal Posted Regulatory Speed (km/h) |    |     |     |     |
|----------|-----------------------------------------|---------------------------------------|----|-----|-----|-----|
|          |                                         | 50                                    | 60 | 70  | 80  | 90  |
| <b>A</b> | Taper Length for Full Lane Closure (m)  | 60                                    | 85 | 155 | 180 | 200 |
| <b>D</b> | Maximum Distance between Markers (m)    | 6                                     | 9  | 9   | 12  | 12  |
|          | Minimum Number of Markers for Taper     | 5                                     | 7  | 9   | 11  | 13  |
| <b>E</b> | Minimum Tangent between Tapers (m)      | 60                                    | 85 | 155 | 180 | 200 |
| <b>F</b> | Distance between Construction Signs (m) | 50                                    | 90 | 120 | 140 | 150 |