

UI-21

Intersection: Left Turn Lane and Adjacent Through Lanes Closed

Multi-Lane Undivided

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

NOTES

i) If space permits, use TC-53A or TC-53B to surround the Work Area, otherwise reduce spacing between TC-54.

ii) It may be necessary to prohibit left turns in the direction reduced to one lane.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

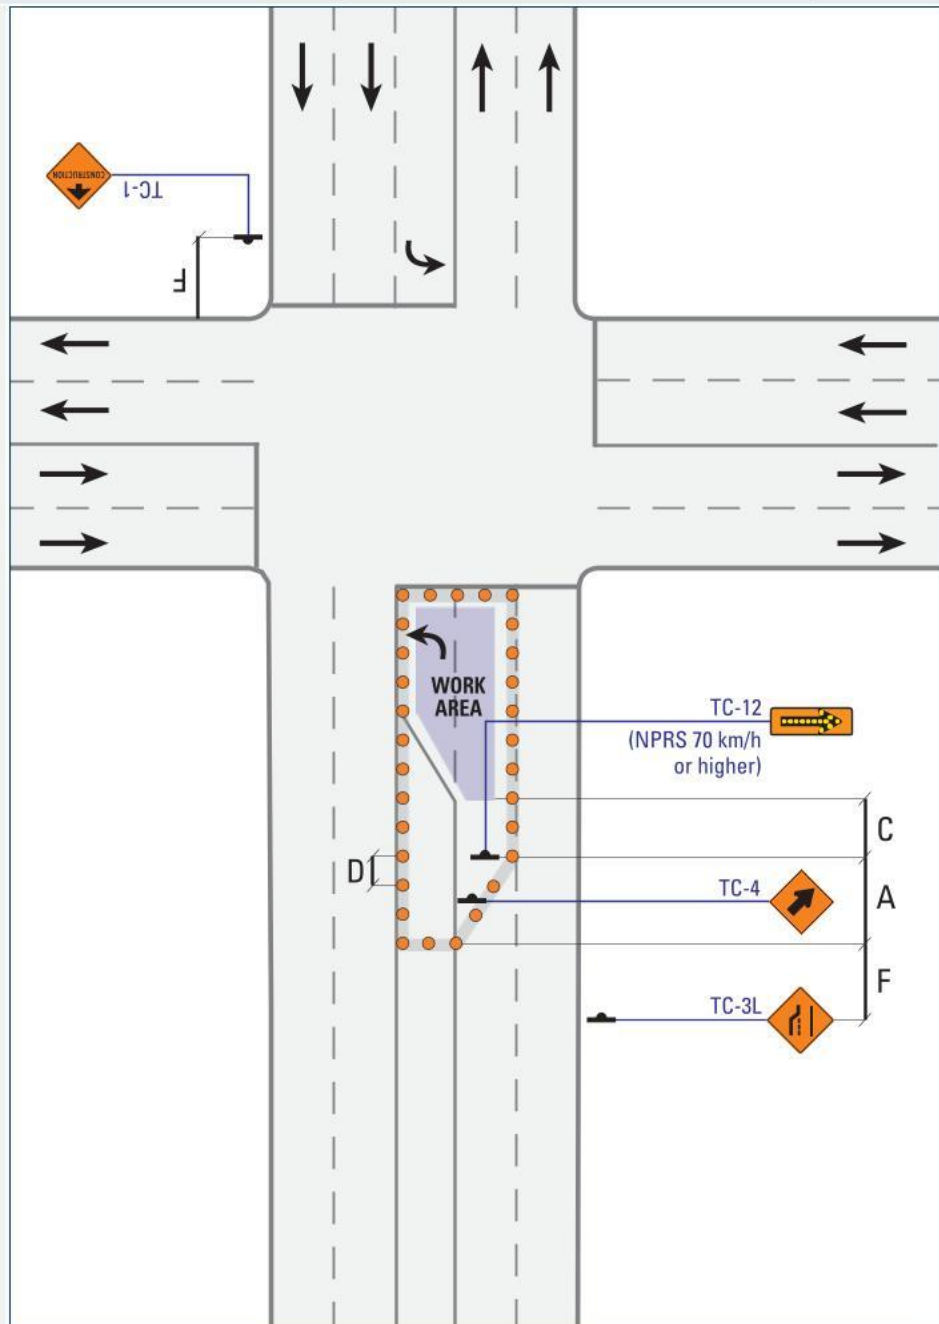

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	100	100	110
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	6	9	9	12
	Minimum Number of Markers for Taper	4	5	5	7	8
F	Distance between Construction Signs (m)	30	30	60	60	80