

UI-26

Work in Intersection: Two Lanes Closed – Option 2

Multi-Lane Undivided

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration

NOTES

i) If space permits, use TC-53A or TC-53B to surround the Work Area, otherwise reduce spacing between TC-54.


ii) It may be necessary to prohibit certain turning movements.

iii) Flashing Amber Light above TC-7 must not be used at intersections with active signals.

iv) See US-25 "Route Detour", for applicable layout.

*The TC-4 sign must be installed at or just beyond the beginning of a lane closure taper.

For further detail on Work Zone components, see Table B (Short/Long, pg. 241).

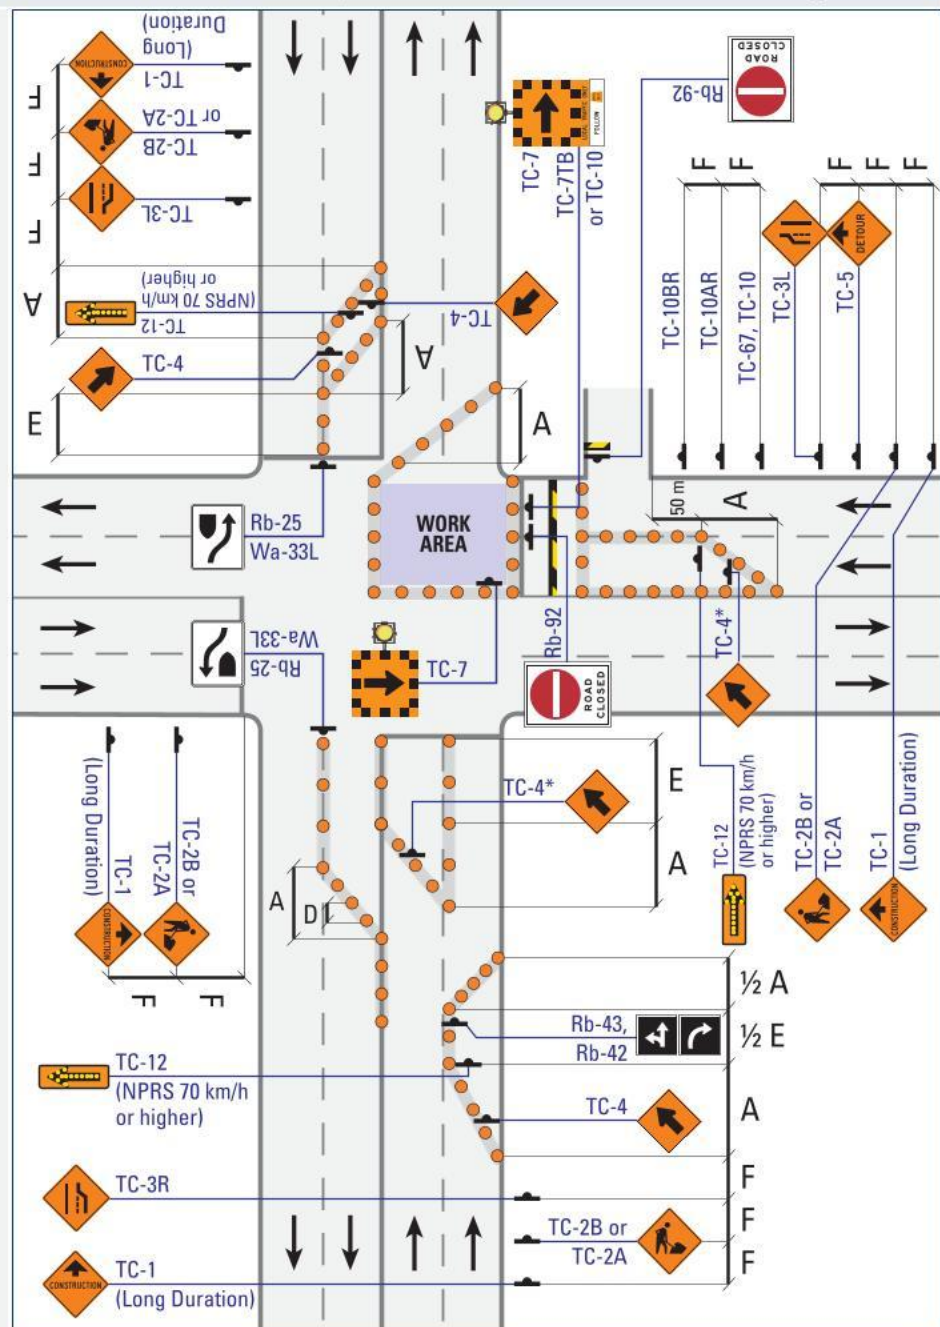

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
D	Maximum Distance between Markers (m)	6	9	9	12	12
Minimum Number of Markers for Taper		5	7	9	11	13
E	Minimum Tangent between Tapers (m)	60	85	155	180	200
F	Distance between Construction Signs (m)	50	90	120	140	150