

**UO-4****Roundabout: Outside Lane Partially Closed****Multi-Lane Undivided**

Mobile Operations

Intermittent

**Very Short Duration**


Short Duration

Long Duration

**NOTES**

i) It may be necessary to leave a wider lane width if there is a high truck percentage.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

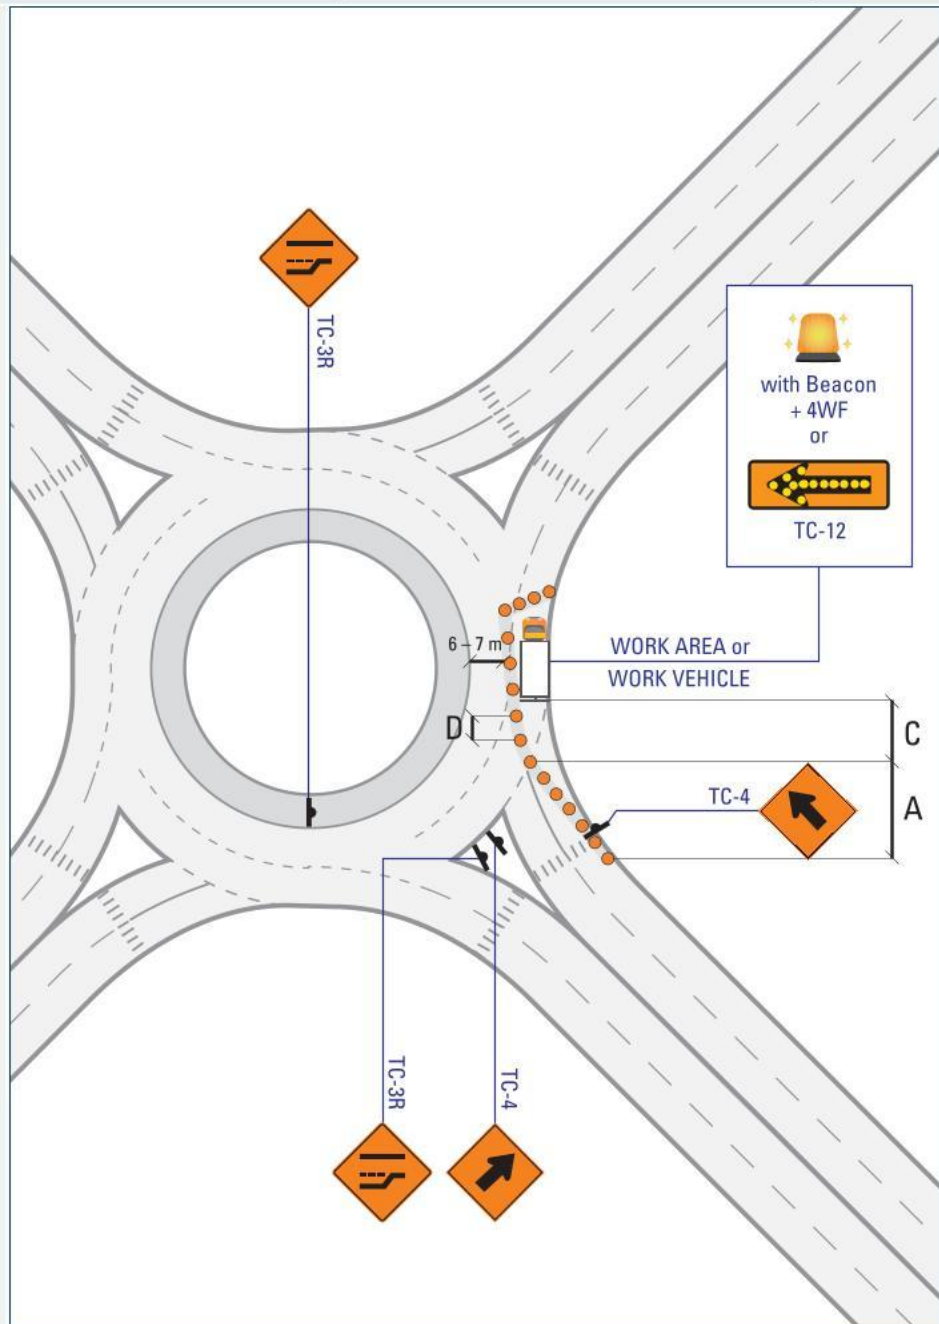

| Label                               | Description                            | Normal Posted Regulatory Speed (km/h) |      |     |     |     |
|-------------------------------------|----------------------------------------|---------------------------------------|------|-----|-----|-----|
|                                     |                                        | 50                                    | 60   | 70  | 80  | 90  |
| <b>A</b>                            | Taper Length for Full Lane Closure (m) | 60                                    | 85   | 100 | 100 | 110 |
| <b>C</b>                            | Longitudinal Buffer Area (LBA) (m)     | (30)                                  | (40) | 50  | 60  | 75  |
| <b>D</b>                            | Maximum Distance between Markers (m)   | 6                                     | 6    | 9   | 9   | 12  |
| Minimum Number of Markers for Taper |                                        | 4                                     | 5    | 5   | 7   | 8   |