

UR-4**Lane Closed at Exit Ramp with an Acceleration Lane****Multi-Lane Undivided**

Mobile Operations

Intermittent

Very Short Duration

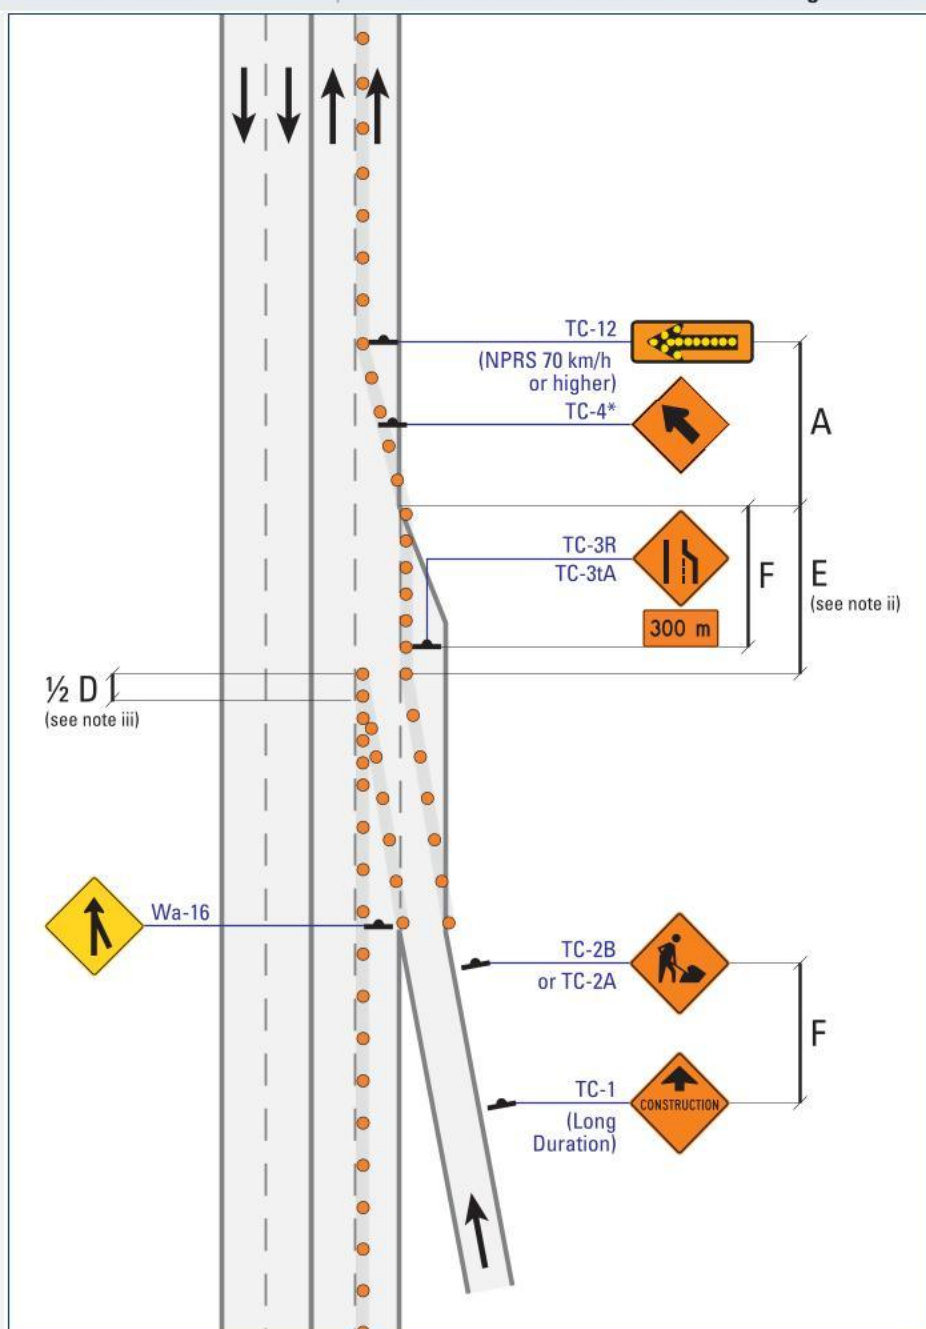
Short Duration**Long Duration****NOTES**

i) For Right Lane Closed, see US-17.

ii) Where space and work activities permit, the acceleration lane should be made as long as possible.

iii) In the immediate area of the entrance, Marker spacings of half of those shown on Table B should be used.

*The TC-4 sign must be installed at or just beyond the beginning of a lane closure taper.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).**Normal Posted Regulatory Speed (km/h)**

Label	Description	50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
E	Minimum Tangent between Tapers (m)	60	85	155	180	200
F	Distance between Construction Signs (m)	50	90	120	140	150