

UR-6**Right Developed Lane Closed****Multi-Lane Undivided**

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

i) Left Developed Lane Closed: mirror image of Right Developed Lane Closed.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

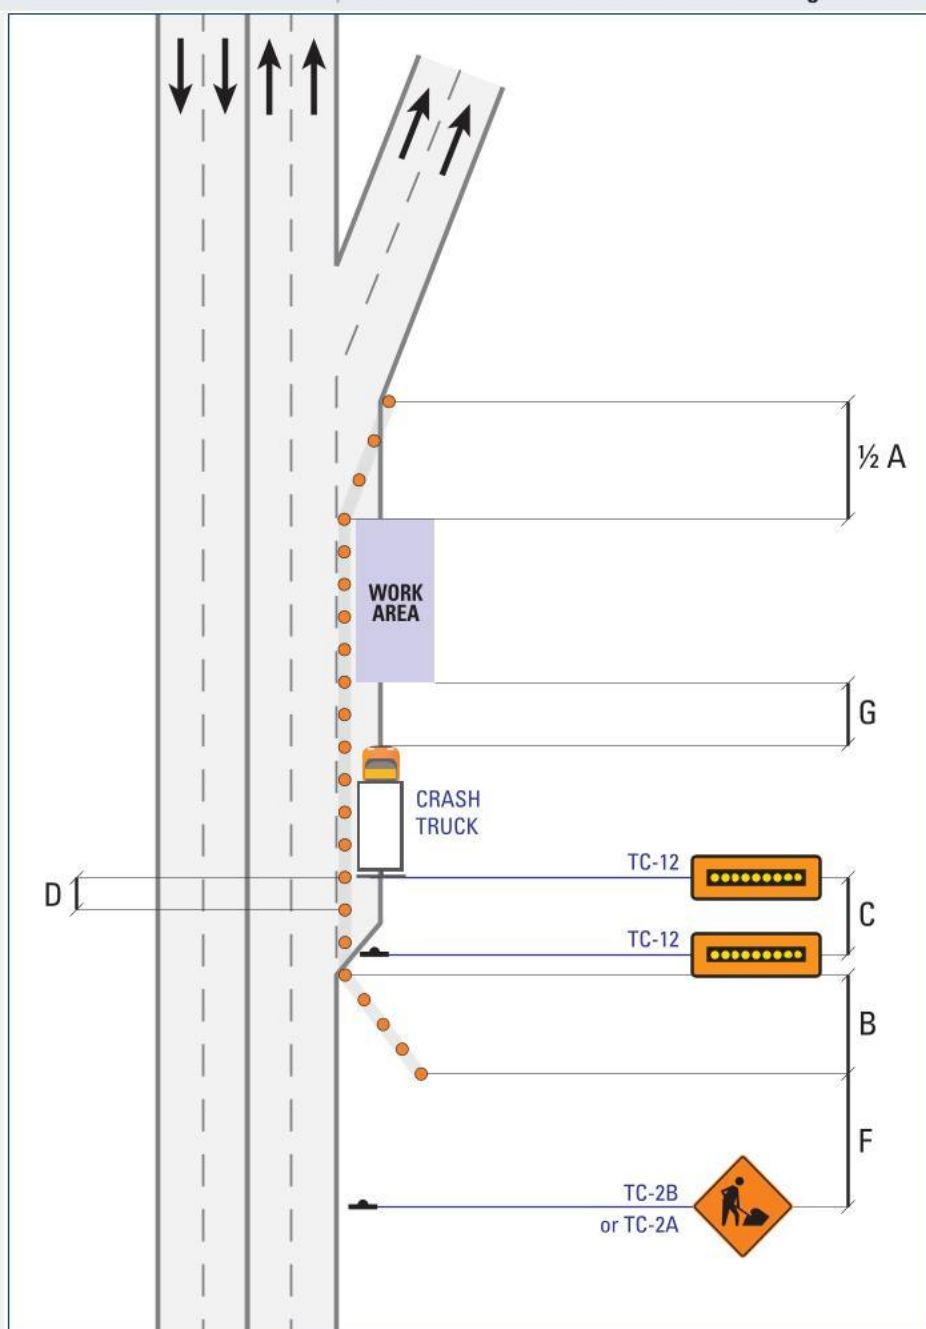

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
B	Shoulder Taper (m)	20	30	55	60	70
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150
G	Stationary Work (Lateral Intrusion Deterrence Gap (LIDG) (m)	(35)	(40)	50	60	65