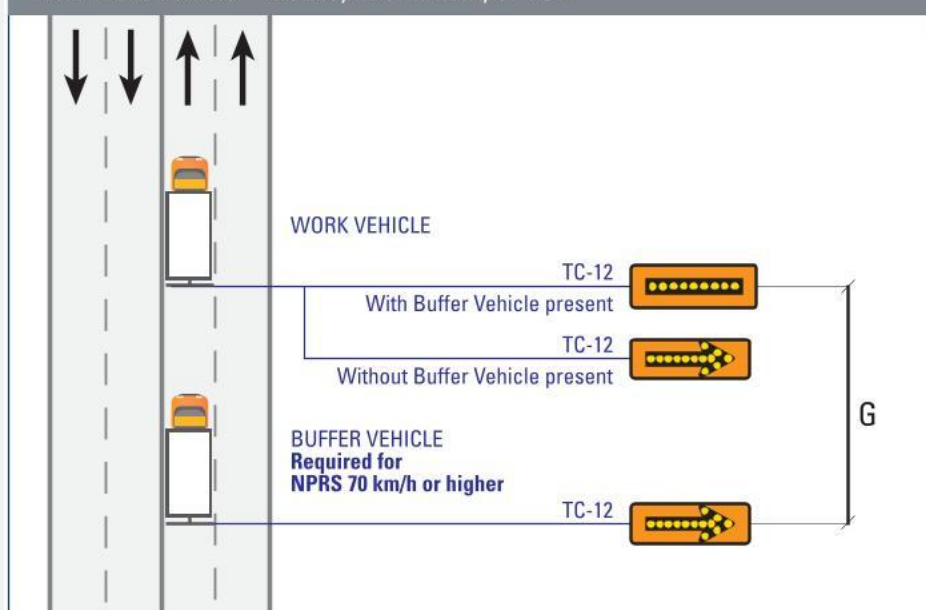
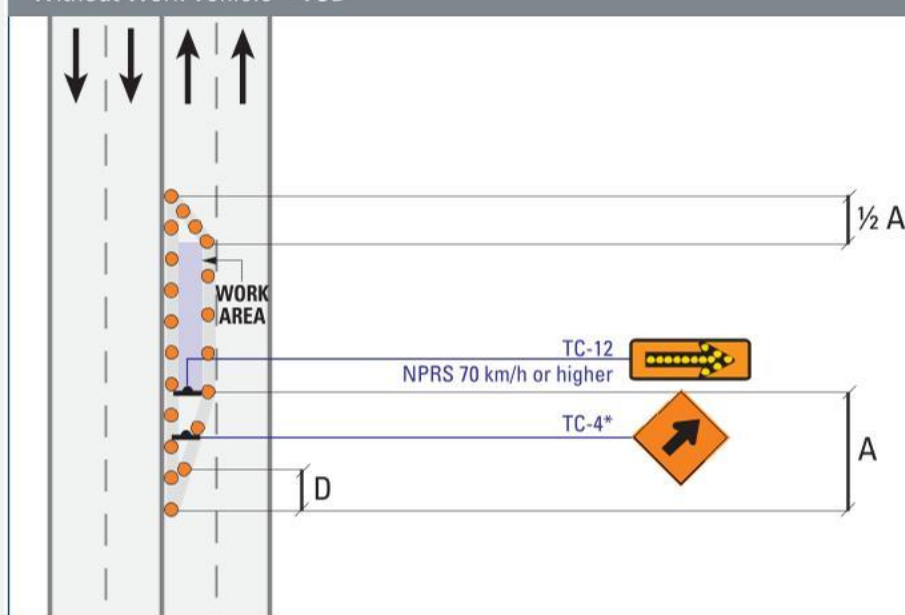


US-14**Left Lane Closed or Occupied****Multi-Lane Undivided****Mobile Operations****Intermittent****Very Short Duration****Short Duration****Long Duration****NOTES**

i) Distance between Sign Truck and Work Vehicle may be adjusted to accommodate hills, curves, restricted visibility, or other site specific conditions.

*The TC-4 sign must be installed at or just beyond the beginning of a lane closure taper.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

With Work Vehicle – Mobile, Intermittent, or VSD**Without Work Vehicle – VSD**

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	100	100	110
D	Maximum Distance between Markers (m)	6	6	9	9	12
	Minimum Number of Markers for Taper	4	5	5	7	8
G	Mobile Work: Lateral Intrusion Deterrence Gap (LIDG) (m)	—	—	35	45	50