

US-19

Passing Lanes: Single-Lane Direction Closed

Multi-Lane Undivided

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration


NOTES

i) The added lane should be allowed to redevelop only if there is sufficient remaining lane length to permit safe passing.

ii) For High Volume roads or Long Duration work longer than five days, the use of Temporary Concrete Barriers should be considered to separate opposing traffic.

iii) For diversions exceeding 1 km, use a TC-16EL (ER) in place of the TC-9L (R), and add an additional TC-16ER (EL) at the beginning of end Taper.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

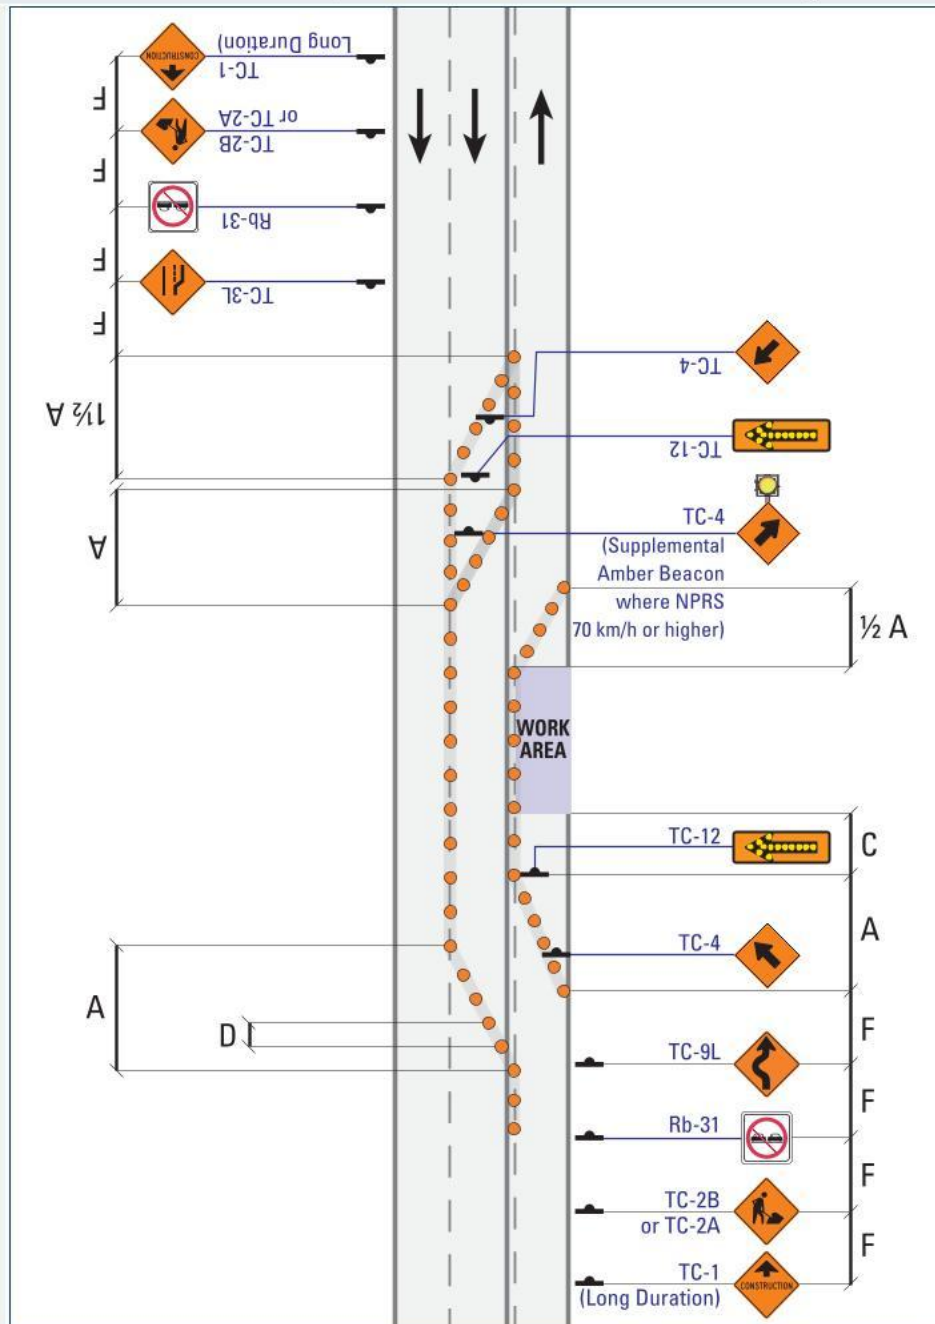

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150