

US-20

Passing Lanes: Centre Lane Closed

Multi-Lane Undivided

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

i) For High Volume roads or Long Duration work longer than five days, the use of Temporary Concrete Barriers should be considered to separate opposing traffic.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

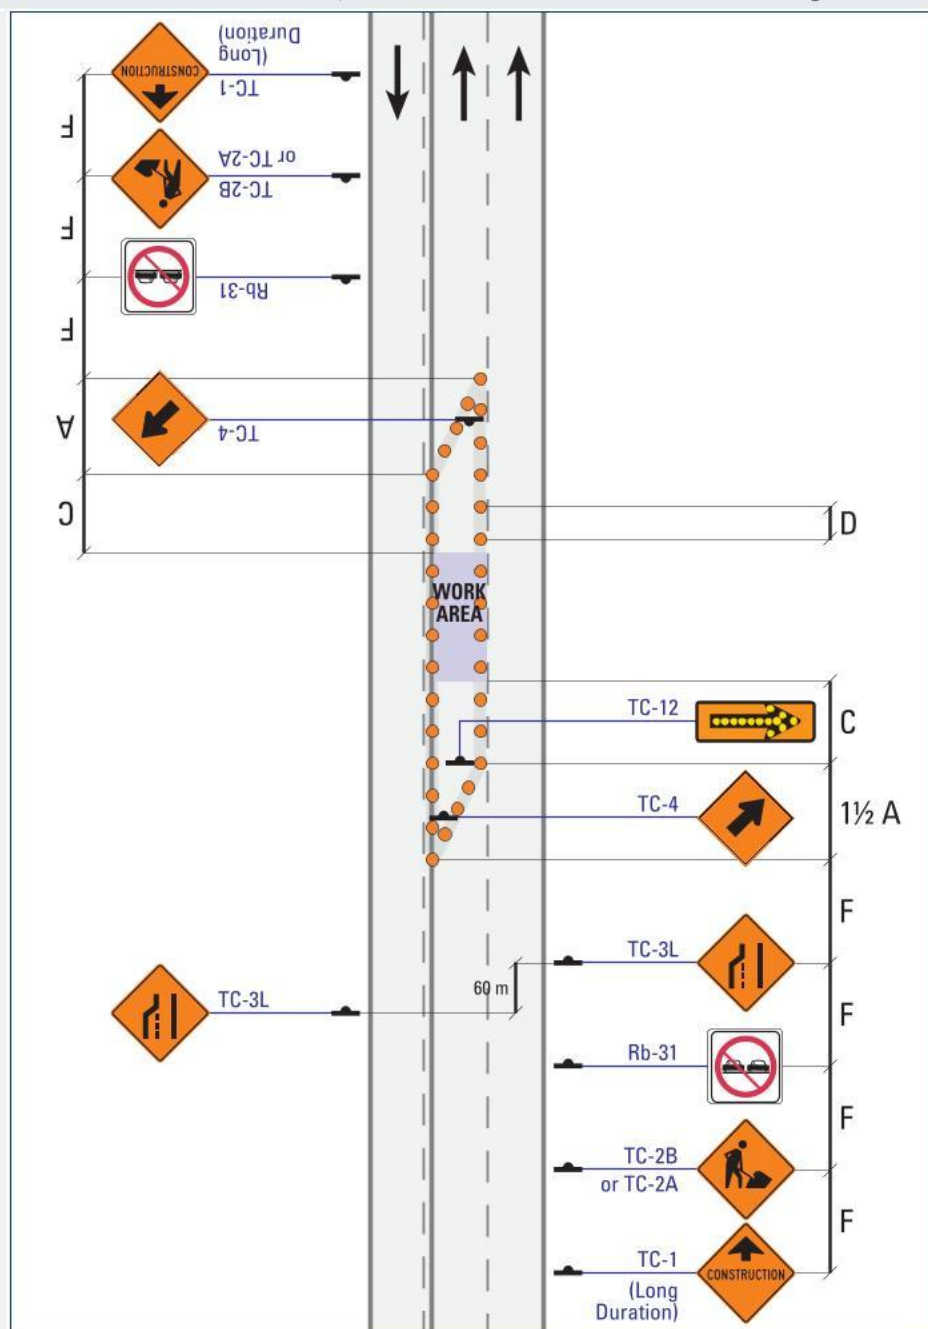

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150