

US-22

Five Lane Road: Two Through Lanes Closed

Multi-Lane Undivided

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

i) For diversions, exceeding 1 km, use a TC-16 EL (ER) in place of the TC-9L (R) and add an additional TC-16 ER (EL) at the beginning of end Taper.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

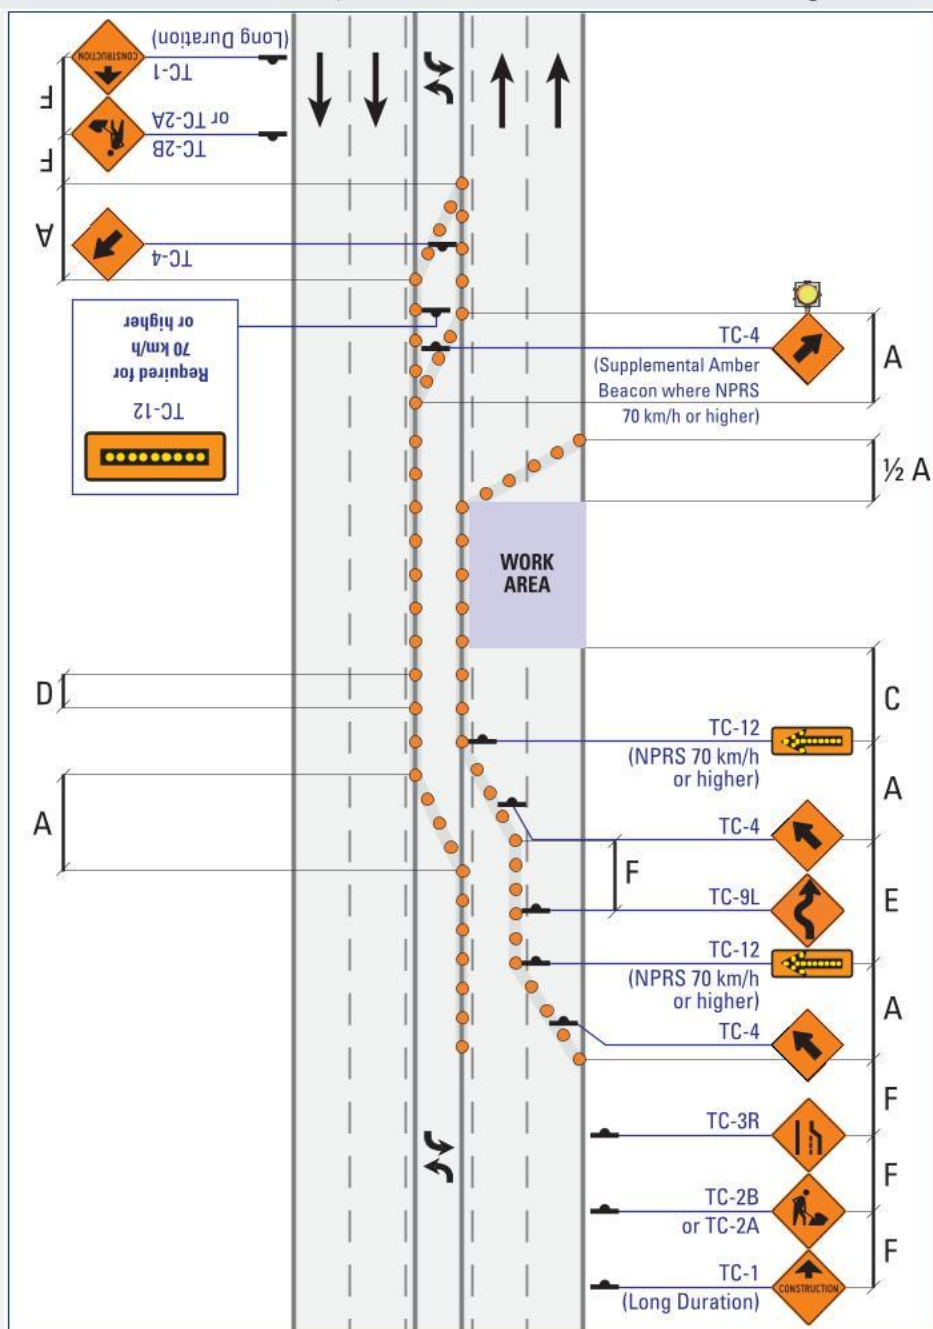

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
E	Minimum Tangent between Tapers (m)	60	85	155	180	200
F	Distance between Construction Signs (m)	50	90	120	140	150