

US-28

Pedestrian Accommodation: Vehicle Encroachment on Road/Sidewalk

Multi-Lane Undivided

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

- i) ▲ Location of Pedestrian Controllers if required (e.g., use of Booms or Hoists). Pedestrian passage under Boom is acceptable when Boom is not in motion and when Hoisting is not underway. Where activities at a Work Area could endanger the public (e.g., trenches, excavation), Pedestrian Barricades must be used.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

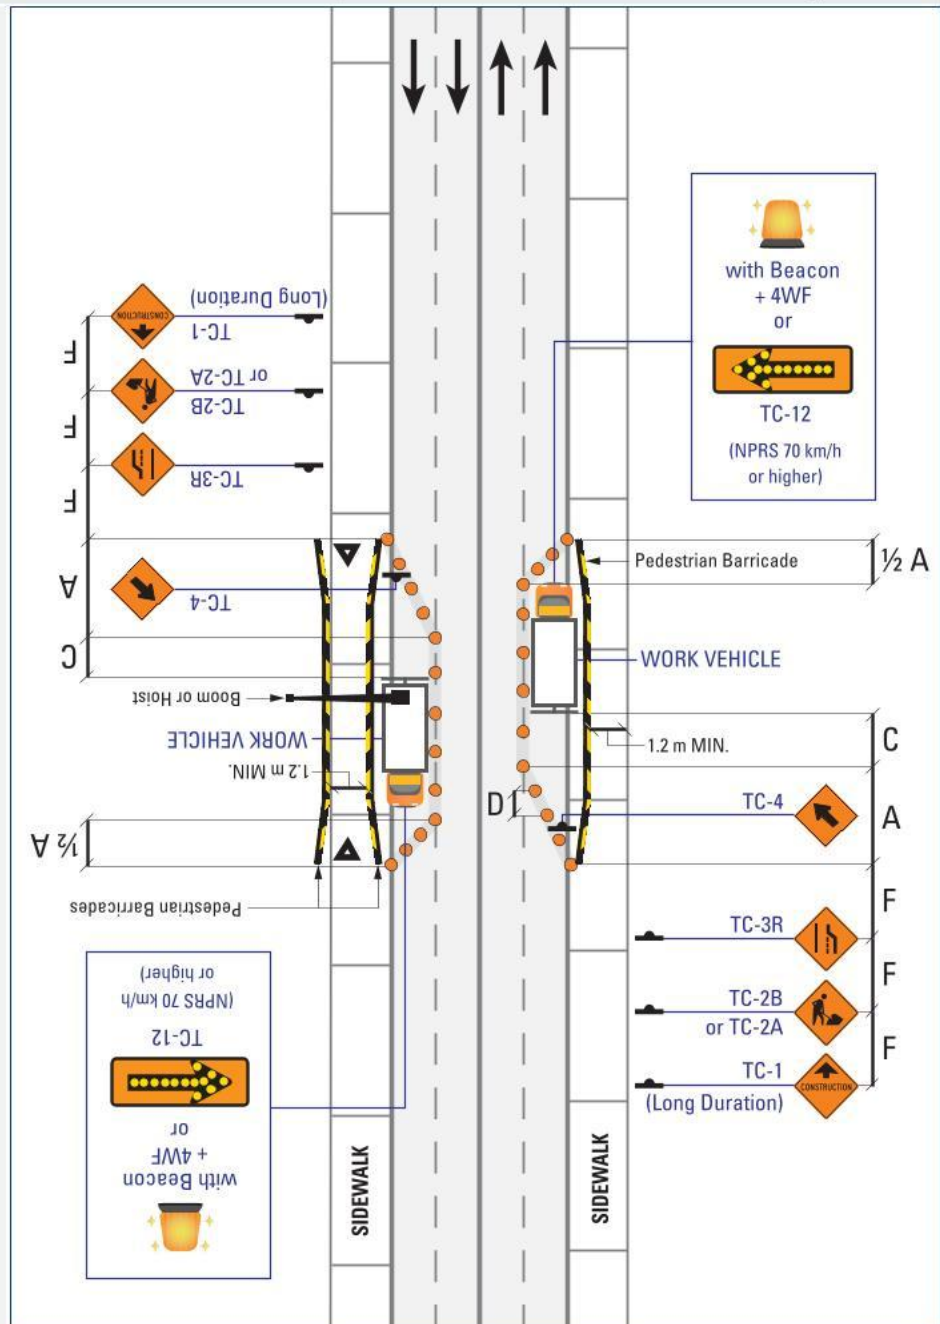

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150