

US-29**Pedestrian Accommodation: Mid-Block Sidewalk Detour onto Roadway****Multi-Lane Undivided**

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

- i) For Sidewalk Closures of Long Durations, a boardwalk and railing should be provided instead of Pedestrian Barricades.
- ii) If close to a crosswalk, pedestrians can be directed to the opposite side of the street with a TC-40 and TC-40T installed at the crosswalk.
- iii) Minimum width of the temporary walkway is 1.2 m.
- iv) AODA-compliant ramps are required if the curb is raised.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

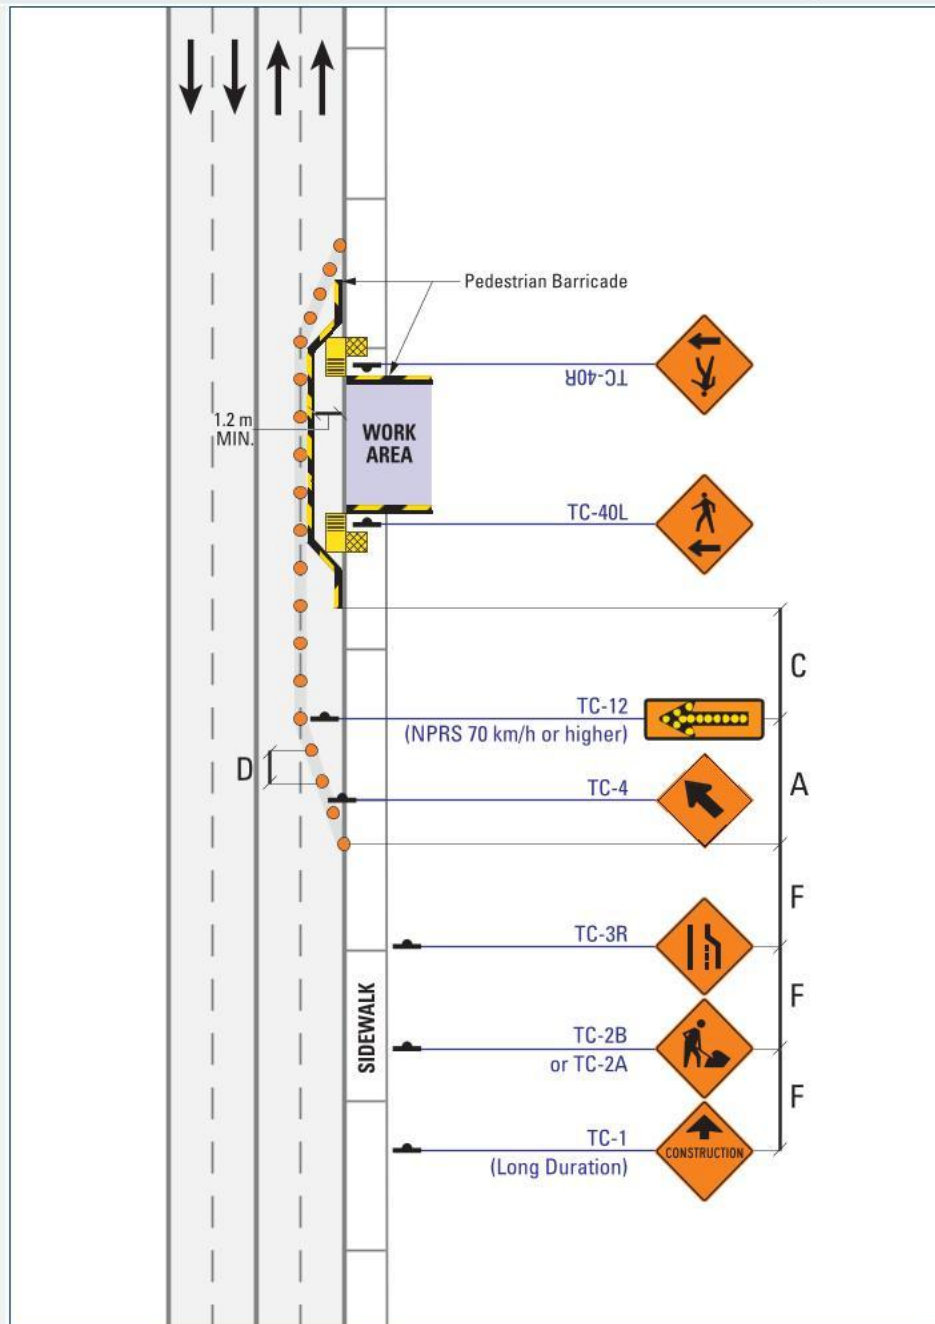

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150