

US-8

Parking Lane Closed

Multi-Lane Undivided

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

- i) A Work Vehicle with Beacon + 4WF or a TC-12 in bar mode can replace Markers.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

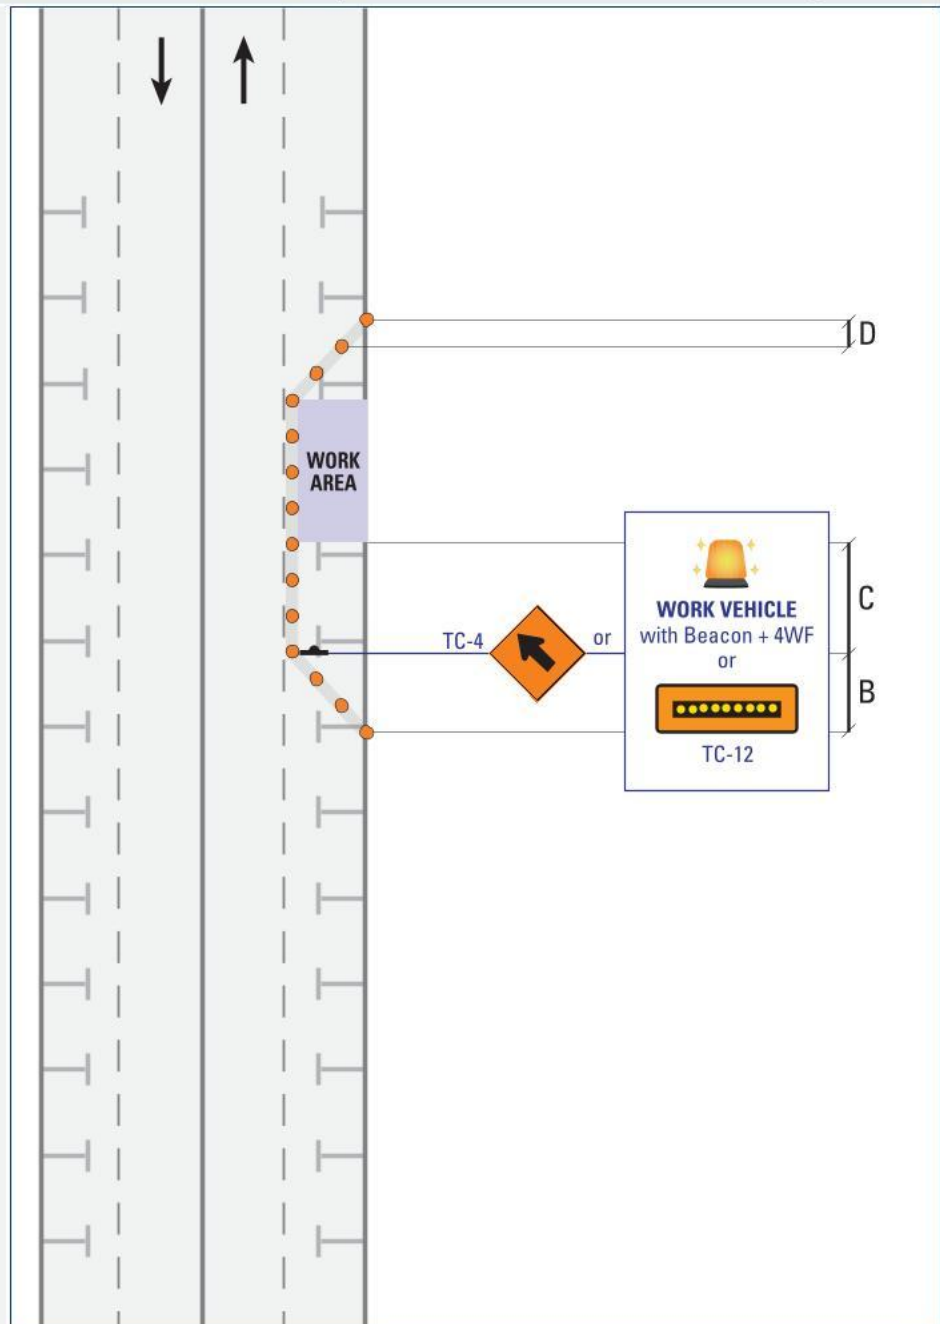

		Normal Posted Regulatory Speed (km/h)			
Label	Description	50	60	70	80
B	Shoulder Taper (m)	20	30	35	35
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60
D	Maximum Distance between Markers (m)	6	6	9	9
Minimum Number of Markers for Taper		4	5	5	7