

US-9**Parking Lane Closed****Multi-Lane Undivided**

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

NOTES

i) Placement of TC-1 or TC-2 may need to be adjusted if visibility is obstructed due to parked vehicles.

ii) For Short Duration work, a Work Vehicle with Beacon + 4WF or a TC-12 in bar mode can replace Markers.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

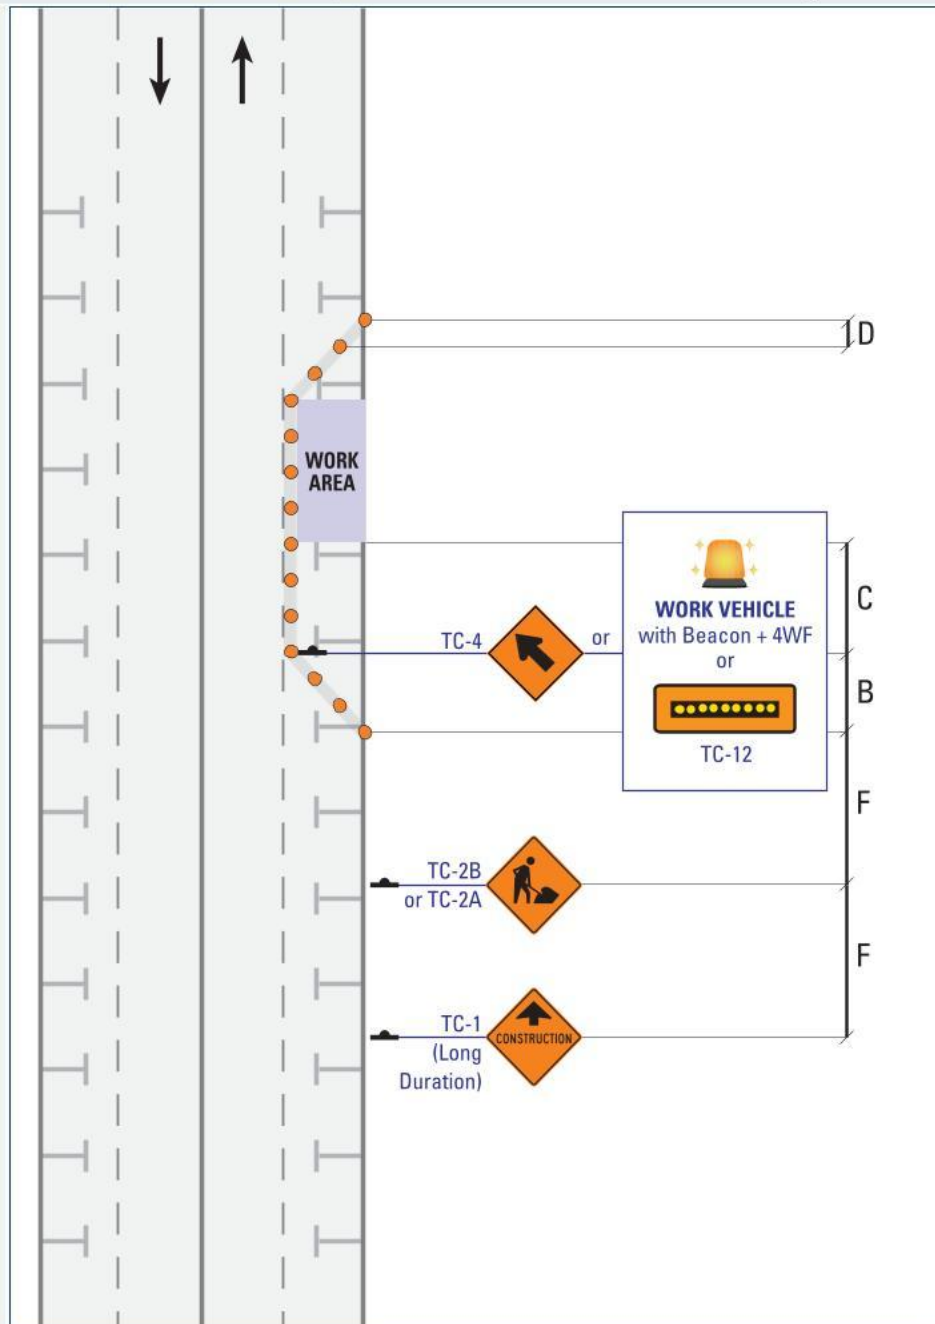

Label	Description	Normal Posted Regulatory Speed (km/h)			
		50	60	70	80
B	Shoulder Taper (m)	20	30	55	60
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60
D	Maximum Distance between Markers (m)	6	9	9	12
	Minimum Number of Markers for Taper	5	7	9	11
F	Distance between Construction Signs (m)	50	90	120	140